


SECTION NO.
963-200

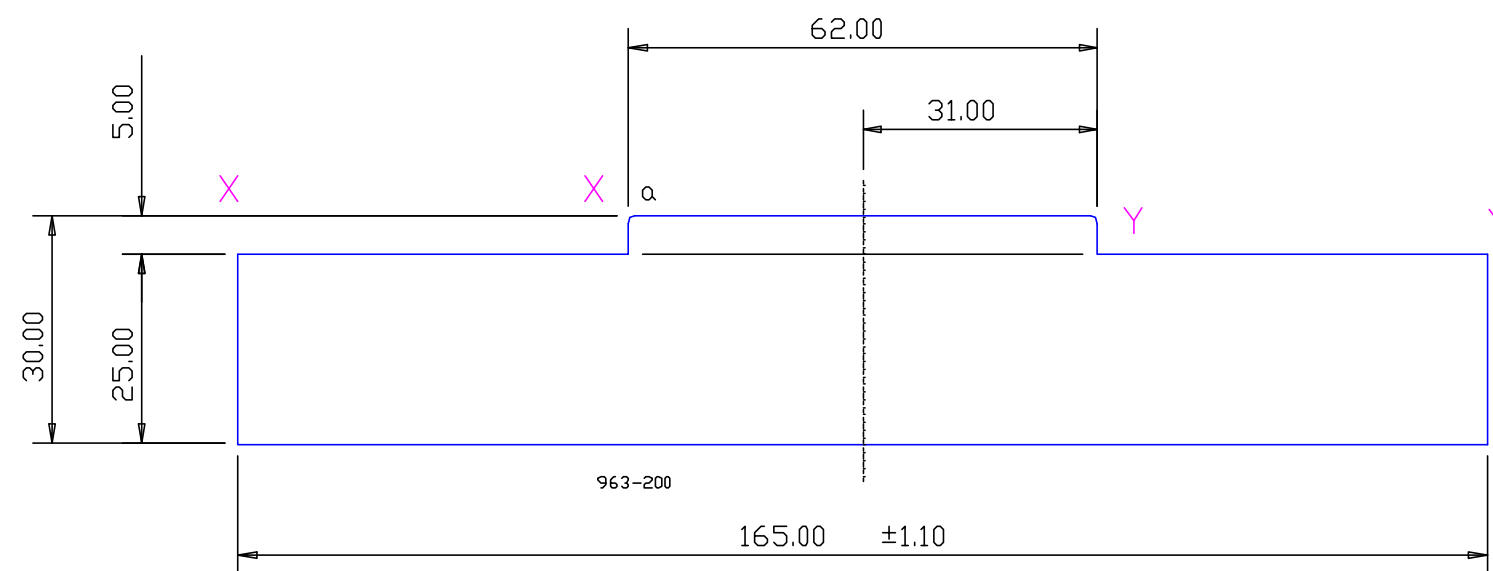

* = 1/2 STD TOLERANCE

a > IMPORTANT F > = FLATNESS CRITICAL ALONG
X-X & Y-Y ±0.10 *

NO EXPOSED SURFACE

MOMENTS OF INERTIA:
I_{XX} = 280 251 mm⁴
I_{YY} = 9 457 491 mm⁴

a = 1.00 radius

0.40 RADIUS ON ALL OUTSIDE CORNERS
UNLESS OTHERWISE SPECIFIED

EXTRUDED FINISH : ARCHITECTURAL

			AREA 4434.6 SQ MM WEIGHT 12.018 KG M PERIMETER 389.1 MM ANOD PERIM 389.1 MM PAINT PERIM 389.1 (0.0) MM C CIRCLE DIA 67. MM FACTOR 32. ALLOY 6063 TEMPER T5	 A.C.N 010 828 234 1082 KINGSFORD SMITH DRIVE, EAGLE FARM, QUEENSLAND, 4009 PO BOX 1376, EAGLE FARM BC, 4009 PHONE : (07) 3877 2833 FAX : (07) 3877 2890	CUSTOMER G. JAMES EXTRUSION Co.	
2 14/08/00PAD FLATNESS IMPORTANT NOTE ADDED C/N 3856 1 26/06/00SPG 30.0 5.0 WERE 33.0 8.0 C/N 3782			CUSTOMER PART NAME NO. 165 x 25 SOLID FLAT SPECIAL			
NO DATE DR REVISION			SCALE 1:1		TOLERANCES IN ACCORDANCE WITH AS 1866-1986 APPLY UNLESS OTHERWISE SPECIFIED	
			DRAWN A.T		CHECK	
			DATE 08/04/87		DWG. NO. 963-200	