




Standard Size Range / Configurations

Stud Opening (Frame Size with reveals + 10mm clearance)
Outer Frame Size (excludes fixing fin & reveals)

Width (mm)

		660	960	1260	1560	1860	2160	2460
		610	910	1210	1510	1810	2110	2410
Height (mm)	650							
	950							
	1250							
	1550							
	1850							

Possible Awning/Fixed (F) Window Configurations

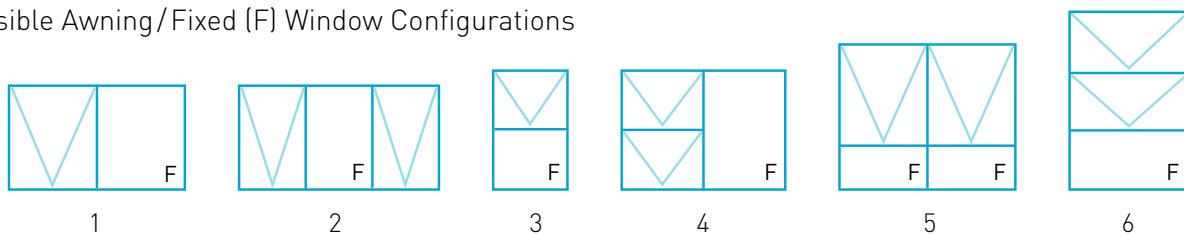

Product Specific Notes:

- Configurations greater than 2410mm wide available.
- Sizes detailed above are based on 'top hung' sashes with chainwinder. Certain sizes may not be available if stays and cam handle hardware option is specified.
- Black chainwinders supplied as standard. White, Silver and keyed chainwinders available on request (additional charges apply).
- Multiple bay configurations will be supplied in equal splits unless requested otherwise.
- Minimum window width for a 'centre drive' chainwinder is 540mm. Minimum window width for 'off-centre drive' winder is 450mm.