




Configurations


3 Leaf




3L



3R




2L1R



1L2R



4 Leaf




4L



4R



3L1R




1L3R




2L2R




5 Leaf



4L1R



1L4R




3L2R




2L3R




5L* or 5R* (not shown)




6 Leaf

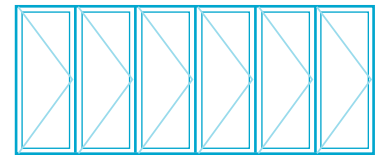


6L



6R



4L2R



2L4R



3L3R



* 5 Leaf configurations should be carefully considered as they require a particular opening and closing sequence. Please consult your G.James representative for further details.

Size Limitations (Guide only and based on N3 Housing – General wind rating)

Product	Max. Height (mm)	Max. Width (mm)	Min. Width per Leaf (mm)	Max. Width per Leaf (mm)	Other
477-570 Series Bottom Rolling Bi-fold Door	2550	6450 Overall door width	450	850	Max. panel weight – 80 kg

Product Specific Notes:

- Consult your G.James representative regarding configurations greater than 5 leaves to determine the most suitable configuration for your situation.
- Internal screening is available upon request, limitations apply.