



G.JAMES

Miscellaneous
Systems
Catalogue



Index - Miscellaneous Systems

980 Series Transport

981 Series Neon Framing

982 Series Picture Framing

983 Series Miscellaneous

984 Series Street Signage

985 Series Marine - (Part 1)

986 Series Curtain & Head Track

989 Series Annexe & Screen Enclosure

990 Series Wall Board

991 Series Coolroom

992 Series Partitioning (Part 1)

993 Series Trim & Shelving

994 Series Partitioning (Part 2) & Skirting

995 Series Shopfront / Public Works Dept. (Part 1)

997 Series Face Glazing

ICT Series Marine (Part 2)

PWD Series Public Works Dept. (Part 2)

Brisbane

1082 Kingsford Smith Drive
Eagle Farm QLD 4009
Ph: (07) 3877 2833
extrusion_sales@gjames.com.au

Sydney

Building 2, 26 Long Street
Smithfield NSW 2164
Ph: (02) 9732 2444
sydney_extrusion@gjames.com.au

Melbourne

217 Rex Road
Campfield VIC 3061
Ph: (03) 9219 2077
melbourne_extrusion@gjames.com.au

Perth

11 Egmont Road
Henderson WA 6166
Ph: (08) 9494 6333
perth_extrusion@gjames.com.au

Adelaide

263 Edinburgh Road
Edinburgh SA 5111
Ph: (08) 8182 7888
extrusion_sales@gjames.com.au

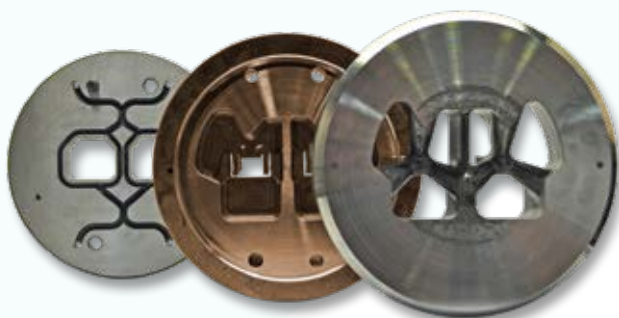


More than just extrusions ...

G.James' Aluminium Products Division specialise in the supply of Australian manufactured custom extrusions, standard geometric shapes and miscellaneous systems.

Commencing operations in 1981, G.James has established a reputation for providing their customers with end-to-end supply chain solutions. From our in-house die design, readily available extrusion press capacity, processing & machining capabilities and surface finishing facilities, we offer the complete product and service package.

Our technical expertise and internal infrastructure is well recognised within the industry as is our commitment to quality and customer satisfaction.



Die Design & Manufacturing

G.James utilise the latest CAD software and an array of CNC machining centres and EDM wire cutting machines to design and manufacture the extrusion die sets required to produce the specified profile.

Press Capabilities

G.James operate four extrusion presses with capacity in excess of 3000 tonnes per month:

Brisbane

1 x 1800 m/t (178mm container)
1 x 2800 m/t (228mm container)
1 x 3500 m/t (254mm container)

Sydney

1 x 3250 / 3500 m/t (228mm container)

CNC Machining Centres

G.James can assist with the machining of your extrusions via our multi-axis CNC machines for the purposes of cutting, drilling, thread cutting, slotting and other processing as specified.



Quality Assurance & Certification

G.James Aluminium Products is accredited to ISO9001 and strictly adheres to a quality control management system throughout all stages of the manufacturing and supply process. We will also issue DNV, Lloyds and NATA test certification if required.

Surface Finishing

G.James supplies a range of attractive and durable anodised and powder coated surface finishing options. Anodising offers clear, bronze, black and bright silver & gold in either satin, brushed or media-blasted finishes.

Warehousing, Packing & Dispatch

For your convenience, G.James welcomes your enquiries regarding our particular warehousing, packing and dispatch options.









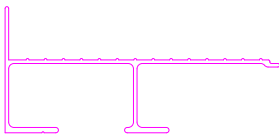





G.JAMES
Aluminium Products





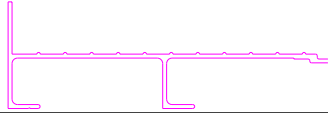

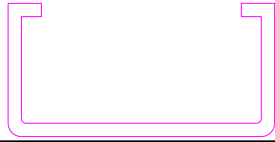


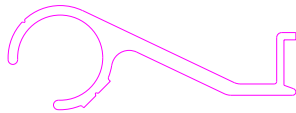


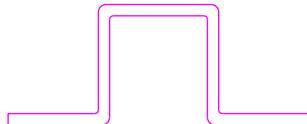

980 Series Sections

SECTION PROPERTIES

980-001	Scale (1 : 2)		MASS 0.620	APER 118	PPER 118	x 50	y 6		
BUMPER BAR FLAT			TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	508 49 182		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
980-002	Scale (1 : 4)		MASS 2.883	APER 426	PPER 218	x 126	y 50		
126 X 50 BULLBAR			TYPE S	ALLOY 6063	TEMPER T5	Ix Iy	246 844 2 448 080		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
980-005	Scale (1 : 8)		MASS 4.092	APER 593	PPER 300	x 80	y 147		
147 X 80 BULLBAR			TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	5 243 144 956 145		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
980-006	Scale (1 : 10)		MASS 4.776	APER 482	PPER 245	x 64	y 128		
128 X 63.5 BULLBAR			TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	4 547 104 713 861		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
980-007	Scale (1 : 2)		MASS 0.578	APER 106	PPER 106	x 50	y 5		
50 X 5 RECESSED FLAT BAR			TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	352 46 295		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
980-009	Scale (1 : 6)		MASS 1.550	APER 339	PPER 170	x 39	y 101		
COMMERCIAL (41MM) REAR COAMING			TYPE S	ALLOY 606391	TEMPER T5	Ix Iy	431 760 34 143		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
980-010	Scale (1 : 6)		MASS 1.817	APER 608	PPER 304	x 191	y 42		
COMMERCIAL (41MM) FLOOR PLANK			TYPE S	ALLOY 6351	TEMPER T5	Ix Iy	178 107 1 854 003		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
980-011	Scale (1 : 8)		MASS 1.611	APER 330	PPER 165	x 31	y 101		
COMMERCIAL (41MM) SIDE COAMING			TYPE S	ALLOY 6063	TEMPER T5	Ix Iy	491 387 25 851		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
980-012	Scale (1 : 6)		MASS 1.911	APER 633	PPER 317	x 155	y 71		
COMMERCIAL (41MM) END KEY PLAN			TYPE S	ALLOY 6005A	TEMPER T5	Ix Iy	238 056 1 464 357		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
980-013	Scale (1 : 7)		MASS 1.907	APER 629	PPER 314	x 225	y 25		
DROPSIDE & TAILGATE			TYPE S	ALLOY 606391	TEMPER T5	Ix Iy	55 850 4 287 531		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
980-014	Scale (1 : 7)		MASS 1.811	APER 655	PPER 328	x 241	y 26		
8" PLANK			TYPE S	ALLOY 6106	TEMPER T5	Ix Iy	58 883 3 152 306		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
980-015	Scale (1 : 6)		MASS 5.695	APER 712	PPER 360	x 180	y 95		
180 X 95 BULLBAR			TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	1 889 149 10 636 928		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			

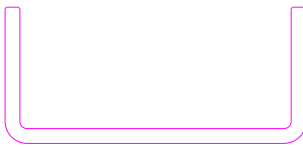
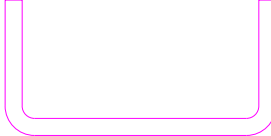
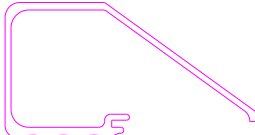
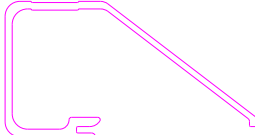



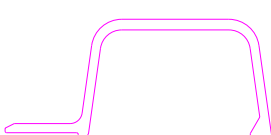
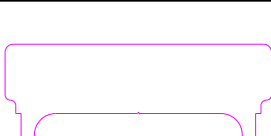



980 Series Sections

SECTION PROPERTIES

980-017	Scale (1 : 5)		MASS 1.039	APER 225	PPER 112	x 38	y 54
REAR COAMING			TYPE S	ALLOY 6063	TEMPER T5	Ix 70 252	Iy 34 572
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-018	Scale (1 : 5)		MASS 0.995	APER 234	PPER 117	x 31	y 56
SIDE COAMING			TYPE S	ALLOY 6351	TEMPER T5	Ix 91 804	Iy 23 219
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-022	Scale (1 : 5)		MASS 1.323	APER 507	PPER 507	x 151	y 50
END KEY PLANK			TYPE S	ALLOY 6106	TEMPER T5	Ix 50 455	Iy 1 088 572
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-035	Scale (1 : 3)		MASS 0.684	APER 320	PPER 163	x 110	y 19
DOUBLE RUB RAIL			TYPE S	ALLOY 6063	TEMPER T6	Ix 13 391	Iy 232 422
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-040	Scale (1 : 8)		MASS 11.009	APER 828	PPER 414	x 200	y 100
200 X 100 BULL BAR			TYPE S	ALLOY 6063	TEMPER T6	Ix 4 785 535	Iy 24 605 625
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-041	Scale (1 : 6)		MASS 1.459	APER 525	PPER 262	x 184	y 26
6" HEAVY DUTY PLANK			TYPE S	ALLOY 6106	TEMPER T5	Ix 47 111	Iy 1 491 345
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-043	Scale (1 : 2)		MASS 0.575	APER 188	PPER 100	x 47	y 25
TAILGATE ADAPTOR			TYPE S	ALLOY 6063	TEMPER T6	Ix 14 378	Iy 30 519
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-048	Scale (1 : 3)		MASS 2.434	APER 394	PPER 283	x 115	y 42
ROPE RAIL BRACKET			TYPE S	ALLOY 6351	TEMPER T5	Ix 105 324	Iy 952 340
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-049	Scale (1 : 6)		MASS 1.790	APER 336	PPER 336	x 39	y 101
COAMING			TYPE S	ALLOY 6063	TEMPER T6	Ix 561 571	Iy 53 817
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-050	Scale (1 : 9)		MASS 14.139	APER 892	PPER 892	x 250	y 110
250 X 110 BULL BAR			TYPE S	ALLOY 6005A	TEMPER T5	Ix 5 798 298	Iy 46 947 571
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-057	Scale (1 : 2)		MASS 1.115	APER 277	PPER 277	x 80	y 32
32MM TOP HAT			TYPE S	ALLOY 6351	TEMPER T5	Ix 60 309	Iy 164 171
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-059	Scale (1 : 7)		MASS 1.553	APER 565	PPER 283	x 212	y 31
177 X 30 FLOOR SECTION			TYPE S	ALLOY 6351	TEMPER T5	Ix 58 972	Iy 2 116 062
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	




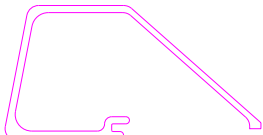
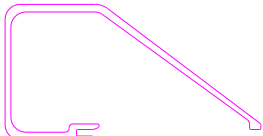


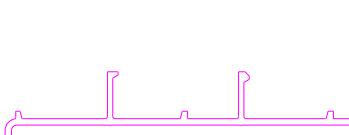


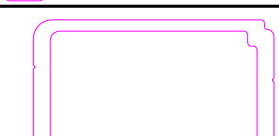

980 Series Sections

SECTION PROPERTIES

980-060	Scale (1 : 9)		MASS 15.183	APER 918	PPER 470	x 254	y 115
254 X 115 X 12.50 CHANNEL			TYPE S	ALLOY 6005	TEMPER T5	Ix 6 837 362	Iy 52 394 248
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-065	Scale (1 : 6)		MASS 7.167	APER 570	PPER 285	x 152	y 76
BULL BAR			TYPE S	ALLOY 6005A	TEMPER T5	Ix 1 432 436	Iy 8 826 686
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-066	Scale (1 : 9)		MASS 7.544	APER 933	PPER 466	x 216	y 114
COAMING			TYPE S	ALLOY 6005A	TEMPER T5	Ix 4 885 276	Iy 11 006 109
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-069	Scale (1 : 9)		MASS 7.557	APER 901	PPER 450	x 216	y 118
COAMING			TYPE S	ALLOY 6005A	TEMPER T5	Ix 4 927 842	Iy 11 157 285
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-075	Scale (1 : 11)		MASS 10.588	APER 1040	PPER 520	x 230	y 140
TIP TRUCK COAMING			TYPE S	ALLOY 6005A	TEMPER T5	Ix 11 408 935	Iy 18 348 372
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-077	Scale (1 : 4)		MASS 7.378	APER 295	PPER 295	x 100	y 40
BASE			TYPE S	ALLOY 6005A	TEMPER T5	Ix 193 008	Iy 2 368 380
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-079	Scale (1 : 12)		MASS 7.180	APER 845	PPER 845	x 167	y 151
TRUCK BODY EXTRUSION			TYPE S	ALLOY 6005A	TEMPER T5	Ix 7 581 678	Iy 7 178 363
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-084	Scale (1 : 7)		MASS 5.386	APER 624	PPER 624	x 175	y 87
TRUCK BODY			TYPE S	ALLOY 6005A	TEMPER T5	Ix 1 736 267	Iy 5 656 746
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-086	Scale (1 : 4)		MASS 7.355	APER 295	PPER 295	x 100	y 42
TRANSPORT SECTION			TYPE S	ALLOY 6005A	TEMPER T5	Ix 197 670	Iy 2 330 038
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-088	Scale (1 : 6)		MASS 6.898	APER 676	PPER 676	x 200	y 60
100MM WIDE MAIN RUNNER (TOP)			TYPE S	ALLOY 6005A	TEMPER T5	Ix 942 294	Iy 7 914 135
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-091	Scale (1 : 4)		MASS 3.763	APER 506	PPER 260	x 125	y 70
125 X 70 BULLBAR			TYPE S	ALLOY 6351	TEMPER T5	Ix 678 001	Iy 3 459 282
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-092	Scale (1 : 6)		MASS 1.714	APER 345	PPER 345	x 45	y 101
REAR COAMING			TYPE S	ALLOY 6351	TEMPER T5	Ix 511 389	Iy 50 370
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	




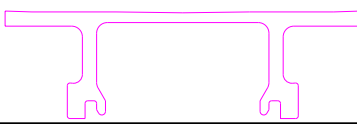




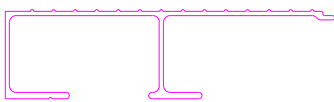



980 Series Sections

SECTION PROPERTIES

980-093	Scale (1 : 6)		MASS 1.883	APER 625	PPER 312	x 187	y 42
FLOOR PLANK	CURRENT NL		TYPE S	ALLOY 6351	TEMPER T5	Ix 193 502	Iy 1 773 465
			40 Kg Pack 0	Len 1 0	Len 2 0		
980-094	Scale (1 : 8)		MASS 1.797	APER 344	PPER 344	x 36	y 101
SIDE COAMING	CURRENT NL		TYPE S	ALLOY 6351	TEMPER T5	Ix 589 171	Iy 41 826
			40 Kg Pack 0	Len 1 0	Len 2 0		
980-095	Scale (1 : 7)		MASS 1.989	APER 661	PPER 331	x 155	y 84
END KEY PLANK	CURRENT NL		TYPE S	ALLOY 6351	TEMPER T5	Ix 299 483	Iy 1 542 621
			40 Kg Pack 0	Len 1 0	Len 2 0		
980-096	Scale (1 : 9)		MASS 7.589	APER 912	PPER 912	x 216	y 114
TOP COAMING - RIGID BODY	CURRENT NL		TYPE S	ALLOY 6005A	TEMPER T5	Ix 4 878 593	Iy 10 768 660
			40 Kg Pack 0	Len 1 0	Len 2 0		
980-097	Scale (1 : 9)		MASS 6.926	APER 896	PPER 896	x 216	y 118
COAMING	CURRENT NL		TYPE S	ALLOY 6005A	TEMPER T5	Ix 4 521 026	Iy 10 213 146
			40 Kg Pack 0	Len 1 0	Len 2 0		
980-098	Scale (1 : 13)		MASS 10.359	APER 624	PPER 624	x 150	y 160
SMALL MAIN RUNNER	CURRENT NL		TYPE B	ALLOY 6005A	TEMPER T5	Ix 13 992 101	Iy 6 721 576
			40 Kg Pack 0	Len 1 0	Len 2 0		
980-103	Scale (1 : 14)		MASS 8.637	APER 821	PPER 411	x 273	y 178
TRANSPORT COVING	CURRENT NL		TYPE S	ALLOY 6005A	TEMPER T5	Ix 8 839 957	Iy 22 818 928
			40 Kg Pack 0	Len 1 0	Len 2 0		
980-104	Scale (1 : 10)		MASS 7.319	APER 927	PPER 927	x 324	y 75
TRANSPORT PLANK	CURRENT NL		TYPE S	ALLOY 6005A	TEMPER T5	Ix 462 403	Iy 23 833 529
			40 Kg Pack 0	Len 1 0	Len 2 0		
980-105	Scale (1 : 12)		MASS 8.561	APER 884	PPER 884	x 152	y 152
TRANSPORT CHANNEL	CURRENT NL		TYPE S	ALLOY 6005A	TEMPER T5	Ix 6 395 456	Iy 9 562 212
			40 Kg Pack 0	Len 1 0	Len 2 0		
980-106	Scale (1 : 5)		MASS 1.962	APER 686	PPER 343	x 235	y 25
DROPSIDE	CURRENT NL		TYPE S	ALLOY 606391	TEMPER T6	Ix 49 352	Iy 4 289 257
			40 Kg Pack 0	Len 1 0	Len 2 0		
980-108	Scale (1 : 4)		MASS 8.823	APER 428	PPER 428	x 143	y 75
REAR PILLAR	CURRENT NL		TYPE B	ALLOY 6106	TEMPER T6	Ix 2 622 454	Iy 7 238 804
			40 Kg Pack 0	Len 1 0	Len 2 0		
980-112	Scale (1 : 17)		MASS 8.963	APER 836	PPER 433	x 244	y 216
TRANSPORT COVING	CURRENT NL		TYPE S	ALLOY 6005A	TEMPER T5	Ix 14 873 545	Iy 18 569 434
			40 Kg Pack 0	Len 1 0	Len 2 0		



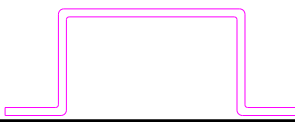


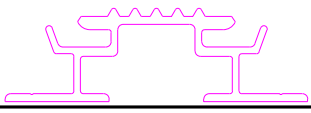

980 Series Sections

SECTION PROPERTIES

980-113	Scale (1 : 10)		MASS 8.661	APER 669	PPER 669	x 165	y 130
TRANSPORT MAIN RUNNER			TYPE B	ALLOY 6005A	TEMPER T5	Ix 7 440 472	Iy 9 398 609
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-115	Scale (1 : 5)		MASS 6.553	APER 603	PPER 603	x 140	y 90
BULL BAR			TYPE S	ALLOY 6351	TEMPER T6	Ix 924 174	Iy 7 482 760
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-116	Scale (1 : 6)		MASS 3.445	APER 1071	PPER 536	x 255	y 40
AIRFLOW SECTION			TYPE S	ALLOY 6063	TEMPER T5	Ix 274 851	Iy 6 275 766
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-121	Scale (1 : 6)		MASS 7.026	APER 683	PPER 683	x 200	y 61
110MM WIDE MAIN RUNNER (TOP)			TYPE S	ALLOY 6005A	TEMPER T5	Ix 1 008 803	Iy 8 811 860
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-123	Scale (1 : 5)		MASS 1.891	APER 627	PPER 314	x 225	y 29
225MM DROPSIDE			TYPE S	ALLOY 606391	TEMPER T5	Ix 59 577	Iy 4 307 045
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-124	Scale (1 : 6)		MASS 1.277	APER 458	PPER 229	x 187	y 26
6" LIGHT PLANK			TYPE S	ALLOY 6351	TEMPER T5	Ix 28 194	Iy 1 489 093
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-126	Scale (1 : 5)		MASS 4.058	APER 512	PPER 512	x 204	y 54
ENCLOSED RUNNING BOARD			TYPE B	ALLOY 6060	TEMPER T5	Ix 783 689	Iy 6 713 556
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-133	Scale (1 : 3)		MASS 0.912	APER 244	PPER 244	x 64	y 32
32MM TOP HAT			TYPE S	ALLOY 6106	TEMPER T6	Ix 50 405	Iy 97 006
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-135	Scale (1 : 5)		MASS 1.750	APER 574	PPER 287	x 155	y 42
COMMERCIAL (41MM) END KEY PLAN			TYPE S	ALLOY 606391	TEMPER T5	Ix 184 165	Iy 1 273 457
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-136	Scale (1 : 8)		MASS 3.827	APER 1128	PPER 564	x 255	y 43
AIRFLOW FLOOR SECTION			TYPE S	ALLOY 6063	TEMPER T5	Ix 317 280	Iy 6 846 111
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-141	Scale (1 : 7)		MASS 4.192	APER 937	PPER 468	x 230	y 35
TRANSPORT SECTION			TYPE S	ALLOY 6005A	TEMPER T5	Ix 226 166	Iy 6 259 093
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
980-142	Scale (1 : 6)		MASS 3.077	APER 685	PPER 342	x 194	y 35
TRANSPORT SECTION			TYPE S	ALLOY 6351	TEMPER T5	Ix 152 963	Iy 2 980 356
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	



980 Series Sections

SECTION PROPERTIES

<p>980-143 Scale (1 : 4) TRANSPORT SECTION</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 2.058</td> <td>APER 486</td> <td>PPER 243</td> <td>x 114</td> <td>y 32</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6351</td> <td>TEMPER T5</td> <td>I_x 103 550</td> <td>I_y 666 063</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 2.058	APER 486	PPER 243	x 114	y 32	TYPE S	ALLOY 6351	TEMPER T5	I_x 103 550	I_y 666 063	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 2.058	APER 486	PPER 243	x 114	y 32												
TYPE S	ALLOY 6351	TEMPER T5	I_x 103 550	I_y 666 063												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>980-144 Scale (1 : 9) CURTAIN TRACK</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 5.454</td> <td>APER 802</td> <td>PPER 401</td> <td>x 131</td> <td>y 111</td> </tr> <tr> <td>TYPE D</td> <td>ALLOY 6351</td> <td>TEMPER T6</td> <td>I_x 2 369 238</td> <td>I_y 2 151 613</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 5.454	APER 802	PPER 401	x 131	y 111	TYPE D	ALLOY 6351	TEMPER T6	I_x 2 369 238	I_y 2 151 613	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 5.454	APER 802	PPER 401	x 131	y 111												
TYPE D	ALLOY 6351	TEMPER T6	I_x 2 369 238	I_y 2 151 613												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>980-145 Scale (1 : 4) TOP HAT</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 1.489</td> <td>APER 369</td> <td>PPER 369</td> <td>x 110</td> <td>y 40</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6351</td> <td>TEMPER T5</td> <td>I_x 134 715</td> <td>I_y 579 164</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 1.489	APER 369	PPER 369	x 110	y 40	TYPE S	ALLOY 6351	TEMPER T5	I_x 134 715	I_y 579 164	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 1.489	APER 369	PPER 369	x 110	y 40												
TYPE S	ALLOY 6351	TEMPER T5	I_x 134 715	I_y 579 164												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>980-148 Scale (1 : 3) 80MM RECESSED FLAT BAR</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 1.432</td> <td>APER 171</td> <td>PPER 171</td> <td>x 80</td> <td>y 8</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6060SF</td> <td>TEMPER T581</td> <td>I_x 2 182</td> <td>I_y 300 633</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 1.432	APER 171	PPER 171	x 80	y 8	TYPE S	ALLOY 6060SF	TEMPER T581	I_x 2 182	I_y 300 633	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 1.432	APER 171	PPER 171	x 80	y 8												
TYPE S	ALLOY 6060SF	TEMPER T581	I_x 2 182	I_y 300 633												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>980-149 Scale (1 : 27) 220 X 100 X 10 X 5 'I' BEAM</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 8.166</td> <td>APER 821</td> <td>PPER 821</td> <td>x 220</td> <td>y 100</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6005A</td> <td>TEMPER T5</td> <td>I_x 1 667 848</td> <td>I_y 25 530 167</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 8.166	APER 821	PPER 821	x 220	y 100	TYPE S	ALLOY 6005A	TEMPER T5	I_x 1 667 848	I_y 25 530 167	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 8.166	APER 821	PPER 821	x 220	y 100												
TYPE S	ALLOY 6005A	TEMPER T5	I_x 1 667 848	I_y 25 530 167												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>980-150 Scale (1 : 4) KRS-MAX579</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 2.174</td> <td>APER 502</td> <td>PPER 251</td> <td>x 114</td> <td>y 35</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6351</td> <td>TEMPER T5</td> <td>I_x 114 684</td> <td>I_y 671 577</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 2.174	APER 502	PPER 251	x 114	y 35	TYPE S	ALLOY 6351	TEMPER T5	I_x 114 684	I_y 671 577	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 2.174	APER 502	PPER 251	x 114	y 35												
TYPE S	ALLOY 6351	TEMPER T5	I_x 114 684	I_y 671 577												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>980-151 Scale (1 : 5) STOCK RAILING LINER</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 1.240</td> <td>APER 401</td> <td>PPER 401</td> <td>x 145</td> <td>y 14</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6351</td> <td>TEMPER T5</td> <td>I_x 11 410</td> <td>I_y 992 634</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 1.240	APER 401	PPER 401	x 145	y 14	TYPE S	ALLOY 6351	TEMPER T5	I_x 11 410	I_y 992 634	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 1.240	APER 401	PPER 401	x 145	y 14												
TYPE S	ALLOY 6351	TEMPER T5	I_x 11 410	I_y 992 634												
40 Kg Pack 0	Len 1 0	Len 2 0														






981 Series Sections

SECTION PROPERTIES

981-001 Scale (1 : 5) NEON FRAMING CURRENT NL 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 150</td> <td>y 20</td> </tr> <tr> <td>1.426</td> <td>530</td> <td>410</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>12 322</td> </tr> <tr> <td>S</td> <td>6063</td> <td>T5</td> <td>Iy</td> <td>1 432 625</td> </tr> </table>	MASS	APER	PPER	x 150	y 20	1.426	530	410			TYPE	ALLOY	TEMPER	Ix	12 322	S	6063	T5	Iy	1 432 625																
MASS	APER	PPER	x 150	y 20																																	
1.426	530	410																																			
TYPE	ALLOY	TEMPER	Ix	12 322																																	
S	6063	T5	Iy	1 432 625																																	
981-006 Scale (1 : 4) STAKING ANGLE CURRENT NL 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 63</td> <td>y 63</td> </tr> <tr> <td>1.496</td> <td>286</td> <td>286</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>191 941</td> </tr> <tr> <td>S</td> <td>6063</td> <td>T6</td> <td>Iy</td> <td>191 941</td> </tr> </table> <table border="1"> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	MASS	APER	PPER	x 63	y 63	1.496	286	286			TYPE	ALLOY	TEMPER	Ix	191 941	S	6063	T6	Iy	191 941	40 Kg Pack	0	Len 1	Len 2							0	0				
MASS	APER	PPER	x 63	y 63																																	
1.496	286	286																																			
TYPE	ALLOY	TEMPER	Ix	191 941																																	
S	6063	T6	Iy	191 941																																	
40 Kg Pack	0	Len 1	Len 2																																		
		0	0																																		



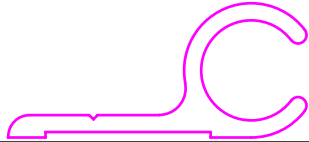









982 Series Sections

SECTION PROPERTIES

<p>982-002 Scale (1 : 1) PICTURE FRAME CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 0.147</td> <td>APER 89</td> <td>PPER 100</td> <td>x 13</td> <td>y 19</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix Iy</td> <td>1 933 991</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.147	APER 89	PPER 100	x 13	y 19	TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	1 933 991	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.147	APER 89	PPER 100	x 13	y 19												
TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	1 933 991												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>982-003 Scale (1 : 2) PICTURE FRAME CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 0.259</td> <td>APER 138</td> <td>PPER 100</td> <td>x 16</td> <td>y 36</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix Iy</td> <td>16 075 1 977</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.259	APER 138	PPER 100	x 16	y 36	TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	16 075 1 977	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.259	APER 138	PPER 100	x 16	y 36												
TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	16 075 1 977												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>982-006 Scale (1 : 1) PICTURE FRAME CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 0.192</td> <td>APER 90</td> <td>PPER 100</td> <td>x 17</td> <td>y 14</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix Iy</td> <td>1 446 2 329</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.192	APER 90	PPER 100	x 17	y 14	TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	1 446 2 329	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.192	APER 90	PPER 100	x 17	y 14												
TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	1 446 2 329												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>982-007 Scale (1 : 2) PICTURE FRAME CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 0.227</td> <td>APER 112</td> <td>PPER 100</td> <td>x 14</td> <td>y 22</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix Iy</td> <td>4 489 1 971</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.227	APER 112	PPER 100	x 14	y 22	TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	4 489 1 971	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.227	APER 112	PPER 100	x 14	y 22												
TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	4 489 1 971												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>982-008 Scale (1 : 1) PICTURE FRAME CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 0.148</td> <td>APER 82</td> <td>PPER 100</td> <td>x 16</td> <td>y 13</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix Iy</td> <td>978 1 438</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.148	APER 82	PPER 100	x 16	y 13	TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	978 1 438	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.148	APER 82	PPER 100	x 16	y 13												
TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	978 1 438												
40 Kg Pack 0	Len 1 0	Len 2 0														













983 Series Sections

SECTION PROPERTIES

983-003	Scale (1 : 4)		MASS 2.093	APER 243	PPER 243	x 54	y 65		
CUT-OFF SAW ANGLE			TYPE S	ALLOY 6063	TEMPER T6	Ix 171 096	Iy 234 652		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-012	Scale (1 : 4)		MASS 1.754	APER 220	PPER 220	x 33	y 67		
BASKET GUIDE			TYPE B	ALLOY 6351	TEMPER T5	Ix 357 929	Iy 80 901		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-018	Scale (1 : 1)		MASS 0.220	APER 95	PPER 100	x 28	y 13		
ROPE RAIL			TYPE S	ALLOY 6063	TEMPER T6	Ix 1 341	Iy 4 362		
CURRENT	STOCKED		40 Kg Pack	28	Len 1 6000	Len 2 0	MILL 758		
983-019	Scale (1 : 1)		MASS 0.130	APER 65	PPER 100	x 17	y 6		
JIG-HANDLE			TYPE S	ALLOY 6063	TEMPER T5	Ix 150	Iy 1 335		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-023	Scale (1 : 1)		MASS 0.138	APER 69	PPER 100	x 18	y 7		
JIG HANDLE			TYPE S	ALLOY 6063	TEMPER T6	Ix 183	Iy 1 471		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-024	Scale (1 : 1)		MASS 0.121	APER 72	PPER 100	x 25	y 5		
TICKET STRIP			TYPE S	ALLOY 6063	TEMPER T6	Ix 72	Iy 3 301		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-025	Scale (1 : 2)		MASS 0.210	APER 122	PPER 100	x 50	y 5		
TICKET STRIP			TYPE S	ALLOY 6063	TEMPER T6	Ix 86	Iy 20 611		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-027	Scale (1 : 1)		MASS 0.168	APER 73	PPER 100	x 32	y 9		
CARPET TIRM			TYPE S	ALLOY 6063	TEMPER T6	Ix 300	Iy 4 807		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-030	Scale (1 : 1)		MASS 0.363	APER 48	PPER 100	x 16	y 14		
HEX. TUBE WITH 6.75 DIA. BORE			TYPE B	ALLOY 6060	TEMPER T5	Ix 2 208	Iy 2 208		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-031	Scale (1 : 3)		MASS 2.775	APER 317	PPER 317	x 100	y 56		
76.2 X 50.8 CHANNEL			TYPE B	ALLOY 6351	TEMPER T5	Ix 453 605	Iy 889 876		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-032	Scale (1 : 2)		MASS 0.252	APER 106	PPER 106	x 27	y 27		
SPACER ANGLE			TYPE S	ALLOY 6063	TEMPER T6	Ix 6 748	Iy 6 748		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-033	Scale (1 : 3)		MASS 0.560	APER 259	PPER 259	x 100	y 22		
CHALK RAIL			TYPE S	ALLOY 6063	TEMPER T5	Ix 4 654	Iy 163 176		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			













983 Series Sections

SECTION PROPERTIES

983-037	Scale (1 : 1)		MASS 0.283	APER 130	PPER 100	x 45	y 11
ROPE RAIL			TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	1 013 11 879
CURRENT	LOW USE		40 Kg Pack 20	Len 1 6000	Len 2 0	MILL 206	
983-046	Scale (1 : 1)		MASS 0.237	APER 109	PPER 100	x 32	y 16
CARAVAN TRIM			TYPE S	ALLOY 6063	TEMPER T1	Ix Iy	1 138 10 739
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
983-051	Scale (1 : 2)		MASS 0.713	APER 101	PPER 101	x 40	y 12
SPACER BAR			TYPE C	ALLOY 6060	TEMPER T5	Ix Iy	4 871 41 200
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
983-053	Scale (1 : 5)		MASS 4.017	APER 783	PPER 783	x 152	y 90
BEAM			TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	845 659 5 298 637
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
983-054	Scale (1 : 5)		MASS 2.634	APER 644	PPER 644	x 121	y 86
JOIST			TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	367 156 2 043 627
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
983-055	Scale (1 : 4)		MASS 2.097	APER 554	PPER 554	x 96	y 69
MINI			TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	221 703 914 538
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
983-056	Scale (1 : 2)		MASS 1.172	APER 152	PPER 100	x 60	y 18
GATE RUNNER			TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	9 086 90 165
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
983-061	Scale (1 : 2)		MASS 0.592	APER 211	PPER 121	x 50	y 16
JOINER			TYPE B	ALLOY 6060SF	TEMPER T581	Ix Iy	9 151 35 217
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
983-072	Scale (1 : 1)		MASS 0.091	APER 68	PPER 100	x 21	y 7
BOARD EDGE			TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	215 1 348
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
983-075	Scale (1 : 6)		MASS 5.945	APER 704	PPER 704	x 169	y 99
STACKER BOOM EXTRUSION - E42			TYPE B	ALLOY 6060	TEMPER T5	Ix Iy	2 354 108 6 889 356
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
983-076	Scale (1 : 2)		MASS 0.238	APER 77	PPER 100	x 30	y 15
OVAL TUBE			TYPE B	ALLOY 6060	TEMPER T5	Ix Iy	2 965 8 277
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
983-084	Scale (1 : 4)		MASS 7.370	APER 313	PPER 313	x 91	y 48
E37 BOOM BRACKET			TYPE S	ALLOY 6351	TEMPER T6	Ix Iy	431 055 2 153 696
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		













983 Series Sections

SECTION PROPERTIES

983-094	Scale (1 : 4)		MASS 2.879	APER 433	PPER 433	x 150	y 26		
SPACER			TYPE S	ALLOY 6063	TEMPER T5	Ix 49 675	Iy 2 039 425		
CURRENT	NIL		40 Kg Pack	0	Len 1	Len 2			
			0	0	0				
983-096	Scale (1 : 4)		MASS 0.509	APER 205	PPER 205	x 76	y 57		
80MM LOUVRE			TYPE S	ALLOY 6063	TEMPER T5	Ix 66 548	Iy 96 489		
CURRENT	NIL		40 Kg Pack	0	Len 1	Len 2			
			0	0	0				
983-097	Scale (1 : 5)		MASS 5.242	APER 579	PPER 579	x 84	y 82		
BEAM			TYPE C	ALLOY 6351	TEMPER T5	Ix 1 678 695	Iy 1 314 111		
CURRENT	NIL		40 Kg Pack	0	Len 1	Len 2			
			0	0	0				
983-101	Scale (1 : 4)		MASS 0.452	APER 108	PPER 100	x 7	y 45		
JUMBO BAR CODE EXTRUSION			TYPE S	ALLOY 6106	TEMPER T6	Ix 35 808	Iy 416		
CURRENT	STOCKED AT COMMERCIAL ONLY		40 Kg Pack	40	Len 1	Len 2	A2BL		
				0	0	0			
983-110	Scale (1 : 2)		MASS 0.810	APER 213	PPER 213	x 49	y 29		
RUNNER TRACK			TYPE S	ALLOY 6063	TEMPER T5	Ix 17 732	Iy 47 229		
CURRENT	NIL		40 Kg Pack	0	Len 1	Len 2			
			0	0	0				
983-115	Scale (1 : 5)		MASS 1.273	APER 267	PPER 267	x 84	y 84		
ENCLOSURE POST 84MM			TYPE B	ALLOY 6060	TEMPER T5	Ix 323 806	Iy 323 806		
CURRENT	NIL		40 Kg Pack	0	Len 1	Len 2			
			0	0	0				
983-117	Scale (1 : 4)		MASS 0.851	APER 201	PPER 201	x 65	y 65		
65MM OCTAGONAL POST			TYPE B	ALLOY 6063	TEMPER T5	Ix 140 624	Iy 140 624		
CURRENT	NIL		40 Kg Pack	0	Len 1	Len 2			
			0	0	0				
983-130	Scale (1 : 2)		MASS 0.254	APER 137	PPER 100	x 28	y 14		
TRIM			TYPE S	ALLOY 6060A	TEMPER T582	Ix 2 786	Iy 6 232		
CURRENT	NIL		40 Kg Pack	0	Len 1	Len 2			
			0	0	0				
983-143	Scale (1 : 2)		MASS 0.704	APER 148	PPER 148	x 50	y 25		
50 X 25 RHS / SCREW FLUTES			TYPE B	ALLOY 6060	TEMPER T5	Ix 24 758	Iy 87 959		
CURRENT	NIL		40 Kg Pack	0	Len 1	Len 2			
			0	0	0				
983-155	Scale (1 : 3)		MASS 0.234	APER 121	PPER 100	x 30	y 33		
TICKET STRIP			TYPE S	ALLOY 6063	TEMPER T5	Ix 9 509	Iy 5 789		
CURRENT	NIL		40 Kg Pack	0	Len 1	Len 2			
			0	0	0				
983-157	Scale (1 : 5)		MASS 2.581	APER 330	PPER 330	x 105	y 60		
BOX SECTION			TYPE B	ALLOY 6060SF	TEMPER T581	Ix 601 170	Iy 1 260 099		
CURRENT	NIL		40 Kg Pack	0	Len 1	Len 2			
			0	0	0				
983-159	Scale (1 : 5)		MASS 0.793	APER 316	PPER 316	x 89	y 76		
89MM LOUVRE BLADE			TYPE S	ALLOY 6063	TEMPER T6	Ix 127 249	Iy 255 219		
CURRENT	NIL		40 Kg Pack	0	Len 1	Len 2			
			0	6000	0				









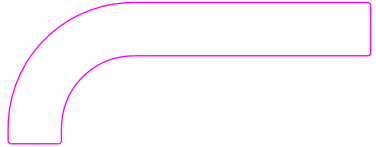



983 Series Sections

SECTION PROPERTIES

983-167	Scale (1 : 5)		MASS 1.129	APER 518	PPER 259	x 175	y 8		
HERITAGE SLAT SECTION			TYPE S	ALLOY 6060	TEMPER T5	Ix 2 494	Iy 984 062		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
983-180	Scale (1 : 9)		MASS 0.640	APER 369	PPER 184	x 75	y 113		
LOUVRE			TYPE S	ALLOY 6060	TEMPER T5	Ix 244 980	Iy 124 066		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
983-181	Scale (1 : 2)		MASS 0.350	APER 136	PPER 136	x 59	y 16		
LOUVRE			TYPE S	ALLOY 6060	TEMPER T5	Ix 2 771	Iy 39 254		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
983-202	Scale (1 : 2)		MASS 0.182	APER 116	PPER 100	x 29	y 29		
WALL ANGLE			TYPE S	ALLOY 6060	TEMPER T5	Ix 4 749	Iy 5 207		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
983-207	Scale (1 : 3)		MASS 0.320	APER 151	PPER 100	x 26	y 38		
CEILING JOINT			TYPE S	ALLOY 6060	TEMPER T5	Ix 15 887	Iy 5 563		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
983-214	Scale (1 : 1)		MASS 0.133	APER 54	PPER 100	x 11	y 16		
16 X 11 X 1.6/2.5 ANGLE			TYPE S	ALLOY 6063	TEMPER T6	Ix 1 117	Iy 549		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
983-215	Scale (1 : 6)		MASS 1.207	APER 493	PPER 246	x 95	y 80		
POP UP CANOPY			TYPE D	ALLOY 606391	TEMPER T6	Ix 271 163	Iy 459 377		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
983-216	Scale (1 : 4)		MASS 1.157	APER 504	PPER 504	x 98	y 63		
POP UP ROOF FRAME			TYPE B	ALLOY 606391	TEMPER T6	Ix 117 696	Iy 419 059		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
983-218	Scale (1 : 3)		MASS 1.213	APER 277	PPER 199	x 70	y 42		
HANDRAIL POST 164			TYPE B	ALLOY 6063	TEMPER T6	Ix 97 709	Iy 236 806		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
983-219	Scale (1 : 2)		MASS 0.875	APER 194	PPER 100	x 45	y 26		
GLAZING CHANNEL 167			TYPE S	ALLOY 6063	TEMPER T6	Ix 17 243	Iy 98 286		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
983-220	Scale (1 : 2)		MASS 0.883	APER 165	PPER 118	x 42	y 26		
BALUSTRADE POST 162			TYPE B	ALLOY 6063	TEMPER T6	Ix 24 995	Iy 63 118		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
983-221	Scale (1 : 3)		MASS 1.777	APER 177	PPER 177	x 45	y 45		
45 BALUSTRADE BOX 4078			TYPE B	ALLOY 6063	TEMPER T6	Ix 200 392	Iy 166 939		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			













983 Series Sections

SECTION PROPERTIES

983-222	Scale (1 : 3)		MASS 0.881	APER 184	PPER 100	x 45	y 43		
CORNER BALUSTRADE 158			TYPE S	ALLOY 6063	TEMPER T5	Ix 57 006	Iy 54 618		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-223	Scale (1 : 4)		MASS 1.319	APER 185	PPER 100	x 52	y 52		
TARP ROLLER - 50MM			TYPE B	ALLOY 6063	TEMPER T5	Ix 141 612	Iy 139 917		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-237	Scale (1 : 5)		MASS 3.943	APER 412	PPER 412	x 150	y 12		
CATHODE			TYPE S	ALLOY 6063	TEMPER T6	Ix 15 204	Iy 2 780 358		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-238	Scale (1 : 3)		MASS 0.705	APER 256	PPER 128	x 41	y 31		
HENDERSON TRACK			TYPE S	ALLOY 6063	TEMPER T6	Ix 36 236	Iy 61 968		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-243	Scale (1 : 5)		MASS 1.732	APER 602	PPER 301	x 171	y 33		
END PLATE FOR MINI GREY BASKET			TYPE S	ALLOY 6351	TEMPER T6	Ix 87 430	Iy 2 204 834		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-247	Scale (1 : 3)		MASS 0.865	APER 207	PPER 105	x 50	y 30		
MARINE KEEL SECTION			TYPE S	ALLOY 6060A	TEMPER T582	Ix 28 069	Iy 120 084		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-248	Scale (1 : 6)		MASS 2.164	APER 320	PPER 320	x 83	y 67		
BASKET GUIDE			TYPE B	ALLOY 6351	TEMPER T5	Ix 485 624	Iy 303 256		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-250	Scale (1 : 3)		MASS 2.869	APER 432	PPER 432	x 105	y 35		
MONORAIL TRACK MK.2			TYPE S	ALLOY 6082	TEMPER T6	Ix 91 001	Iy 1 288 263		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-253	Scale (1 : 2)		MASS 2.074	APER 172	PPER 172	x 68	y 27		
SPLINE BAR - LIMIT STEP			TYPE S	ALLOY 6063	TEMPER T5	Ix 30 824	Iy 312 841		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-254	Scale (1 : 6)		MASS 3.843	APER 239	PPER 239	x 76	y 76		
RUNOUT ROLLER			TYPE C	ALLOY 6351	TEMPER T5	Ix 834 094	Iy 834 094		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-255	Scale (1 : 5)		MASS 0.353	APER 220	PPER 220	x 54	y 54		
PACKING BASE			TYPE S	ALLOY 6351	TEMPER T5	Ix 32 913	Iy 32 913		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-262	Scale (1 : 4)		MASS 1.187	APER 264	PPER 264	x 120	y 21		
GLASS STRAIGHT EDGE			TYPE C	ALLOY 6106	TEMPER T6	Ix 27 868	Iy 577 906		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			


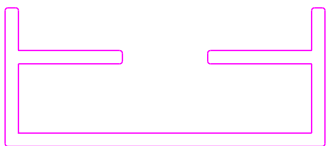




983 Series Sections

SECTION PROPERTIES

983-263	Scale (1 : 11)		MASS 6.179	APER 772	PPER 573	x 110	y 141		
INPOST SHELTER BRACKET			TYPE S	ALLOY 6351	TEMPER T5	Ix 2 936 816	Iy 3 067 214		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-270	Scale (1 : 5)		MASS 1.047	APER 223	PPER 223	x 57	y 57		
SQUARE TUBE			TYPE B	ALLOY 6063	TEMPER T5	Ix 190 958	Iy 190 958		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-275	Scale (1 : 3)		MASS 0.676	APER 212	PPER 212	x 42	y 40		
50MM KNEERAIL			TYPE S	ALLOY 6351	TEMPER T5	Ix 36 331	Iy 58 632		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-278	Scale (1 : 2)		MASS 0.202	APER 129	PPER 110	x 28	y 14		
T-SLAT ROUNDED			TYPE S	ALLOY 6063	TEMPER T5	Ix 1 248	Iy 5 824		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-280	Scale (1 : 9)		MASS 4.803	APER 614	PPER 614	x 300	y 40		
300MM ELIPTICAL LOUVRE BLADE			TYPE C	ALLOY 6063	TEMPER T5	Ix 330 458	Iy 12 524 524		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-281	Scale (1 : 7)		MASS 3.297	APER 334	PPER 219	x 48	y 91		
CHANNEL			TYPE B	ALLOY 6063	TEMPER T5	Ix 935 120	Iy 205 236		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-282	Scale (1 : 7)		MASS 4.500	APER 586	PPER 586	x 120	y 80		
120 X 80 BEAM			TYPE D	ALLOY 6106	TEMPER T6	Ix 1 482 188	Iy 3 336 825		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-289	Scale (1 : 3)		MASS 0.842	APER 190	PPER 190	x 90	y 16		
LOUVRE 'B'			TYPE C	ALLOY 6060	TEMPER T5	Ix 8 472	Iy 203 895		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-290	Scale (1 : 1)		MASS 0.249	APER 65	PPER 100	x 28	y 6		
INFILL			TYPE S	ALLOY 6060	TEMPER T5	Ix 223	Iy 4 917		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-293	Scale (1 : 5)		MASS 0.921	APER 241	PPER 168	x 32	y 60		
LIGHT FRAME			TYPE B	ALLOY 6060	TEMPER T5	Ix 132 027	Iy 59 413		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-294	Scale (1 : 5)		MASS 7.681	APER 457	PPER 457	x 175	y 32		
SPACER COMB			TYPE B	ALLOY 6005A	TEMPER T5	Ix 324 307	Iy 6 054 695		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
983-295	Scale (1 : 3)		MASS 1.138	APER 209	PPER 209	x 100	y 20		
100MM ELIPTICAL LOUVRE			TYPE C	ALLOY 6106	TEMPER T6	Ix 18 386	Iy 323 694		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			











983 Series Sections

SECTION PROPERTIES

<p>983-296 Scale (1 : 7) ROLLER - RUN OUT TABLE CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 7.935</td> <td>APER 283</td> <td>PPER 283</td> <td>x 90</td> <td>y 90</td> </tr> <tr> <td>TYPE C</td> <td>ALLOY 6060</td> <td>TEMPER T5</td> <td>Ix 1 745 600</td> <td>Iy 1 745 600</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 7.935	APER 283	PPER 283	x 90	y 90	TYPE C	ALLOY 6060	TEMPER T5	Ix 1 745 600	Iy 1 745 600	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 7.935	APER 283	PPER 283	x 90	y 90												
TYPE C	ALLOY 6060	TEMPER T5	Ix 1 745 600	Iy 1 745 600												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>983-297 Scale (1 : 2) SPACER CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 0.988</td> <td>APER 295</td> <td>PPER 295</td> <td>x 60</td> <td>y 26</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6351</td> <td>TEMPER T5</td> <td>Ix 23 442</td> <td>Iy 175 703</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.988	APER 295	PPER 295	x 60	y 26	TYPE S	ALLOY 6351	TEMPER T5	Ix 23 442	Iy 175 703	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.988	APER 295	PPER 295	x 60	y 26												
TYPE S	ALLOY 6351	TEMPER T5	Ix 23 442	Iy 175 703												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>983-298 Scale (1 : 4) SPACER CHANNEL CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 1.252</td> <td>APER 334</td> <td>PPER 334</td> <td>x 114</td> <td>y 29</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6351</td> <td>TEMPER T5</td> <td>Ix 31 028</td> <td>Iy 609 742</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 1.252	APER 334	PPER 334	x 114	y 29	TYPE S	ALLOY 6351	TEMPER T5	Ix 31 028	Iy 609 742	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 1.252	APER 334	PPER 334	x 114	y 29												
TYPE S	ALLOY 6351	TEMPER T5	Ix 31 028	Iy 609 742												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>983-299 Scale (1 : 2) LAMINATED SEPARATOR CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 0.403</td> <td>APER 53</td> <td>PPER 100</td> <td>x 17</td> <td>y 17</td> </tr> <tr> <td>TYPE B</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix 3 529</td> <td>Iy 3 529</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.403	APER 53	PPER 100	x 17	y 17	TYPE B	ALLOY 6063	TEMPER T6	Ix 3 529	Iy 3 529	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.403	APER 53	PPER 100	x 17	y 17												
TYPE B	ALLOY 6063	TEMPER T6	Ix 3 529	Iy 3 529												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>983-300 Scale (1 : 6) SECURITY SECTION SUPPORT CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 4.610</td> <td>APER 1146</td> <td>PPER 1146</td> <td>x 195</td> <td>y 71</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix 800 157</td> <td>Iy 8 248 484</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 4.610	APER 1146	PPER 1146	x 195	y 71	TYPE S	ALLOY 6063	TEMPER T6	Ix 800 157	Iy 8 248 484	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 4.610	APER 1146	PPER 1146	x 195	y 71												
TYPE S	ALLOY 6063	TEMPER T6	Ix 800 157	Iy 8 248 484												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>983-301 Scale (1 : 6) CURTAIN RAIL REPAIR PROFILE CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 1.319</td> <td>APER 298</td> <td>PPER 149</td> <td>x 55</td> <td>y 71</td> </tr> <tr> <td>TYPE B</td> <td>ALLOY 6351</td> <td>TEMPER T5</td> <td>Ix 165 754</td> <td>Iy 139 947</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 1.319	APER 298	PPER 149	x 55	y 71	TYPE B	ALLOY 6351	TEMPER T5	Ix 165 754	Iy 139 947	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 1.319	APER 298	PPER 149	x 55	y 71												
TYPE B	ALLOY 6351	TEMPER T5	Ix 165 754	Iy 139 947												
40 Kg Pack 0	Len 1 0	Len 2 0														













984 Series Sections

SECTION PROPERTIES

<p>984-001 Scale (1 : 6) STREET SIGN BRACKET</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 38</td> <td>y 107</td> </tr> <tr> <td>1.194</td> <td>293</td> <td>151</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>435 704</td> </tr> <tr> <td>S</td> <td>6063</td> <td>T5</td> <td>Iy</td> <td>54 601</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 38	y 107	1.194	293	151			TYPE	ALLOY	TEMPER	Ix	435 704	S	6063	T5	Iy	54 601	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 38	y 107																											
1.194	293	151																													
TYPE	ALLOY	TEMPER	Ix	435 704																											
S	6063	T5	Iy	54 601																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>984-002 Scale (1 : 6) STREET SIGN BRACKET</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 33</td> <td>y 105</td> </tr> <tr> <td>1.140</td> <td>273</td> <td>272</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>389 529</td> </tr> <tr> <td>S</td> <td>6063</td> <td>T6</td> <td>Iy</td> <td>47 645</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 33	y 105	1.140	273	272			TYPE	ALLOY	TEMPER	Ix	389 529	S	6063	T6	Iy	47 645	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 33	y 105																											
1.140	273	272																													
TYPE	ALLOY	TEMPER	Ix	389 529																											
S	6063	T6	Iy	47 645																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>984-003 Scale (1 : 3) ANTI-VANDAL ADAPTOR (ST.SIGNS)</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 17</td> <td>y 38</td> </tr> <tr> <td>0.362</td> <td>127</td> <td>127</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>11 769</td> </tr> <tr> <td>B</td> <td>6063</td> <td>T6</td> <td>Iy</td> <td>2 707</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 17	y 38	0.362	127	127			TYPE	ALLOY	TEMPER	Ix	11 769	B	6063	T6	Iy	2 707	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 17	y 38																											
0.362	127	127																													
TYPE	ALLOY	TEMPER	Ix	11 769																											
B	6063	T6	Iy	2 707																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>984-008 Scale (1 : 2) SIGN POST</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 29</td> <td>y 26</td> </tr> <tr> <td>0.674</td> <td>186</td> <td>100</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>20 752</td> </tr> <tr> <td>S</td> <td>6063</td> <td>T5</td> <td>Iy</td> <td>29 009</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 29	y 26	0.674	186	100			TYPE	ALLOY	TEMPER	Ix	20 752	S	6063	T5	Iy	29 009	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 29	y 26																											
0.674	186	100																													
TYPE	ALLOY	TEMPER	Ix	20 752																											
S	6063	T5	Iy	29 009																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>984-010 Scale (1 : 5) 150MM SIGN BLADE</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 152</td> <td>y 18</td> </tr> <tr> <td>1.187</td> <td>359</td> <td>359</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>3 231</td> </tr> <tr> <td>S</td> <td>6060</td> <td>T5</td> <td>Iy</td> <td>1 469 445</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 152	y 18	1.187	359	359			TYPE	ALLOY	TEMPER	Ix	3 231	S	6060	T5	Iy	1 469 445	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 152	y 18																											
1.187	359	359																													
TYPE	ALLOY	TEMPER	Ix	3 231																											
S	6060	T5	Iy	1 469 445																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>984-011 Scale (1 : 6) 200MM SIGN BLADE</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 199</td> <td>y 20</td> </tr> <tr> <td>1.722</td> <td>462</td> <td>462</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>4 284</td> </tr> <tr> <td>S</td> <td>6060</td> <td>T5</td> <td>Iy</td> <td>3 039 900</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 199	y 20	1.722	462	462			TYPE	ALLOY	TEMPER	Ix	4 284	S	6060	T5	Iy	3 039 900	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 199	y 20																											
1.722	462	462																													
TYPE	ALLOY	TEMPER	Ix	4 284																											
S	6060	T5	Iy	3 039 900																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>984-015 Scale (1 : 4) STREET SIGN BRACKET</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 107</td> <td>y 73</td> </tr> <tr> <td>1.745</td> <td>430</td> <td>288</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>245 732</td> </tr> <tr> <td>B</td> <td>6063</td> <td>T6</td> <td>Iy</td> <td>438 099</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 107	y 73	1.745	430	288			TYPE	ALLOY	TEMPER	Ix	245 732	B	6063	T6	Iy	438 099	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 107	y 73																											
1.745	430	288																													
TYPE	ALLOY	TEMPER	Ix	245 732																											
B	6063	T6	Iy	438 099																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>984-016 Scale (1 : 6) STREET SIGN BRACKET</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 104</td> <td>y 68</td> </tr> <tr> <td>1.694</td> <td>409</td> <td>270</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>228 616</td> </tr> <tr> <td>B</td> <td>6060</td> <td>T5</td> <td>Iy</td> <td>401 362</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 104	y 68	1.694	409	270			TYPE	ALLOY	TEMPER	Ix	228 616	B	6060	T5	Iy	401 362	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 104	y 68																											
1.694	409	270																													
TYPE	ALLOY	TEMPER	Ix	228 616																											
B	6060	T5	Iy	401 362																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>984-024 Scale (1 : 5) SIGN BLADE</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 199</td> <td>y 19</td> </tr> <tr> <td>1.973</td> <td>448</td> <td>448</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>6 264</td> </tr> <tr> <td>S</td> <td>6063</td> <td>T5</td> <td>Iy</td> <td>3 990 311</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 199	y 19	1.973	448	448			TYPE	ALLOY	TEMPER	Ix	6 264	S	6063	T5	Iy	3 990 311	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 199	y 19																											
1.973	448	448																													
TYPE	ALLOY	TEMPER	Ix	6 264																											
S	6063	T5	Iy	3 990 311																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>984-025 Scale (1 : 4) SIGN BLADE</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 149</td> <td>y 19</td> </tr> <tr> <td>1.675</td> <td>348</td> <td>348</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>6 219</td> </tr> <tr> <td>S</td> <td>6063</td> <td>T5</td> <td>Iy</td> <td>1 975 857</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 149	y 19	1.675	348	348			TYPE	ALLOY	TEMPER	Ix	6 219	S	6063	T5	Iy	1 975 857	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 149	y 19																											
1.675	348	348																													
TYPE	ALLOY	TEMPER	Ix	6 219																											
S	6063	T5	Iy	1 975 857																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												













985 Series Sections

SECTION PROPERTIES

985-001	Scale (1 : 2)		MASS 0.710	APER 226	PPER 226	x 65	y 29
BOAT RIB			TYPE S	ALLOY 6063	TEMPER T5	Ix 30 696	Iy 76 862
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
985-002	Scale (1 : 2)		MASS 0.908	APER 112	PPER 112	x 43	y 30
GUNNEL SECTION			TYPE S	ALLOY 6063	TEMPER T5	Ix 32 380	Iy 90 186
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
985-003	Scale (1 : 3)		MASS 1.178	APER 218	PPER 218	x 71	y 50
MARINE SUITE			TYPE S	ALLOY 6063	TEMPER T1	Ix 65 444	Iy 131 924
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
985-004	Scale (1 : 4)		MASS 1.408	APER 278	PPER 148	x 53	y 60
MARINE GUNNEL			TYPE S	ALLOY 6063	TEMPER T1	Ix 235 544	Iy 122 133
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
985-005	Scale (1 : 2)		MASS 0.253	APER 80	PPER 100	x 10	y 18
WINDSCREEN FRAME (MARINE)			TYPE S	ALLOY 6063	TEMPER T1	Ix 2 536	Iy 1 126
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
985-009	Scale (1 : 1)		MASS 0.370	APER 101	PPER 100	x 24	y 10
AQUA-1 FEMALE SECTION			TYPE S	ALLOY 6063	TEMPER T6	Ix 1 536	Iy 4 707
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
985-010	Scale (1 : 1)		MASS 0.378	APER 104	PPER 100	x 26	y 10
MALE SECTION			TYPE S	ALLOY 6063	TEMPER T6	Ix 1 416	Iy 5 949
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
985-011	Scale (1 : 1)		MASS 0.364	APER 91	PPER 100	x 22	y 10
MALE SECTION			TYPE S	ALLOY 6063	TEMPER T1	Ix 1 497	Iy 4 347
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
985-013	Scale (1 : 2)		MASS 0.346	APER 118	PPER 100	x 31	y 14
GLAZING SECTION			TYPE S	ALLOY 6060SF	TEMPER T581	Ix 3 207	Iy 7 948
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
985-014	Scale (1 : 2)		MASS 0.531	APER 140	PPER 100	x 38	y 16
DOOR STOP SECTION			TYPE S	ALLOY 6060SF	TEMPER T581	Ix 4 552	Iy 15 044
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
985-015	Scale (1 : 2)		MASS 0.582	APER 194	PPER 100	x 34	y 31
GLAZING SECTION			TYPE S	ALLOY 6063	TEMPER T1	Ix 11 413	Iy 32 583
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
985-017	Scale (1 : 8)		MASS 2.977	APER 738	PPER 369	x 267	y 33
250MM MARINE DECKING			TYPE S	ALLOY NV6082	TEMPER T6	Ix 117 842	Iy 6 748 786
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		


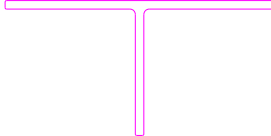

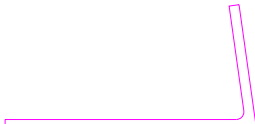








985 Series Sections

SECTION PROPERTIES

985-019	Scale (1 : 5)		MASS 5.057	APER 554	PPER 554	x 228	y 49		
MARINE PLANK			TYPE C	ALLOY 6106	TEMPER T6	Ix 680 197	Iy 9 084 541		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
985-020	Scale (1 : 4)		MASS 0.645	APER 157	PPER 100	x 40	y 40		
40 X 40 X 3 'T' RAD CNRS			TYPE S	ALLOY 6063	TEMPER T5	Ix 36 169	Iy 16 126		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
985-023	Scale (1 : 8)		MASS 2.115	APER 772	PPER 386	x 268	y 37		
250MM BOAT DECKING			TYPE S	ALLOY 6082	TEMPER T6	Ix 143 976	Iy 4 661 438		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
985-027	Scale (1 : 5)		MASS 0.907	APER 167	PPER 100	x 32	y 54		
32 X 54 X 4 'T' SECTION			TYPE S	ALLOY 6082	TEMPER T6	Ix 99 784	Iy 11 196		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
985-028	Scale (1 : 3)		MASS 0.590	APER 124	PPER 100	x 32	y 32		
32 X 32 'T' SECTION			TYPE S	ALLOY 6082	TEMPER T6	Ix 18 648	Iy 10 967		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
985-030	Scale (1 : 10)		MASS 6.142	APER 966	PPER 483	x 320	y 67		
FLOOR PLANK			TYPE S	ALLOY 6082	TEMPER T6	Ix 1 182 141	Iy 20 675 190		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
985-031	Scale (1 : 4)		MASS 1.075	APER 184	PPER 100	x 48	y 50		
50 X 48 X 4 'T' SECTION			TYPE S	ALLOY 6082	TEMPER T6	Ix 90 935	Iy 30 024		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
985-034	Scale (1 : 4)		MASS 1.940	APER 437	PPER 218	x 82	y 75		
KEEL			TYPE D	ALLOY 6106	TEMPER T5	Ix 442 815	Iy 435 060		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
985-036	Scale (1 : 10)		MASS 3.740	APER 905	PPER 452	x 338	y 37		
320MM BOAT DECKING			TYPE S	ALLOY NV6082	TEMPER T6	Ix 237 319	Iy 13 275 351		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
985-041	Scale (1 : 3)		MASS 2.127	APER 264	PPER 264	x 120	y 18		
HOLD DOWN			TYPE S	ALLOY 6082	TEMPER T6	Ix 16 268	Iy 772 490		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
985-042	Scale (1 : 5)		MASS 13.620	APER 284	PPER 284	x 80	y 80		
SOLID			TYPE S	ALLOY 6082	TEMPER T6	Ix 2 246 870	Iy 2 246 870		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
985-043	Scale (1 : 3)		MASS 2.037	APER 260	PPER 260	x 80	y 50		
80 X 50 X 3 RHS			TYPE A	ALLOY 6082	TEMPER T6	Ix 311 549	Iy 657 711		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				









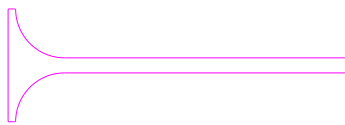

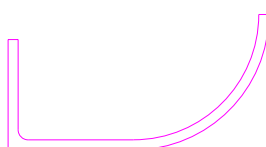

985 Series Sections

SECTION PROPERTIES

985-044	Scale (1 : 4)		MASS 1.875	APER 240	PPER 120	x 80	y 40		
80 X 40 X 3 RHS			TYPE A	ALLOY 6082	TEMPER T6	Ix 186 355	Iy 568 731		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
985-045	Scale (1 : 4)		MASS 1.290	APER 300	PPER 150	x 101	y 51		
TEE 50 50 X 100 X 3.2 TEE			TYPE S	ALLOY 6082	TEMPER T6	Ix 94 601	Iy 273 524		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
985-047	Scale (1 : 1)		MASS 0.173	APER 128	PPER 100	x 40	y 6		
JOINER			TYPE S	ALLOY 6060	TEMPER T5	Ix 346	Iy 6 054		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
985-049	Scale (1 : 3)		MASS 1.587	APER 297	PPER 297	x 100	y 50		
100 X 50 X 4 ANGLE			TYPE S	ALLOY 6082	TEMPER T6	Ix 109 576	Iy 585 078		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
985-054	Scale (1 : 6)		MASS 4.654	APER 356	PPER 356	x 80	y 100		
100 X 80 X 10.0 ANGLE			TYPE S	ALLOY 6082	TEMPER T6	Ix 1 679 556	Iy 954 580		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
985-055	Scale (1 : 9)		MASS 10.261	APER 885	PPER 442	x 314	y 62		
VEHICLE DECK			TYPE C	ALLOY NV6082	TEMPER T6	Ix 2 332 803	Iy 29 719 736		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
985-056	Scale (1 : 7)		MASS 6.703	APER 748	PPER 748	x 326	y 38		
VEHICLE DECK			TYPE C	ALLOY NV6082	TEMPER T6	Ix 559 316	Iy 23 547 627		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
985-057	Scale (1 : 7)		MASS 9.938	APER 886	PPER 886	x 314	y 62		
VEHICLE DECK			TYPE C	ALLOY NV6082	TEMPER T6	Ix 2 227 914	Iy 28 823 878		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
985-058	Scale (1 : 8)		MASS 7.104	APER 688	PPER 344	x 253	y 78		
SPONSON EXTRUSION 'A'			TYPE S	ALLOY 6082	TEMPER T6	Ix 1 329 870	Iy 15 075 032		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
985-059	Scale (1 : 14)		MASS 6.806	APER 689	PPER 345	x 252	y 176		
SPONSON EXTRUSION 'B'			TYPE S	ALLOY 6082	TEMPER T6	Ix 5 562 350	Iy 14 956 231		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
985-061	Scale (1 : 2)		MASS 0.886	APER 116	PPER 100	x 50	y 8		
RIDER FLAT - 50MM			TYPE S	ALLOY 6082	TEMPER T6	Ix 1 314	Iy 67 231		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
985-062	Scale (1 : 3)		MASS 1.374	APER 176	PPER 100	x 80	y 8		
RIDER FLAT - 80MM			TYPE S	ALLOY 6082	TEMPER T6	Ix 1 877	Iy 270 350		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			













985 Series Sections

SECTION PROPERTIES

985-063	Scale (1 : 3)		MASS 1.373	APER 188	PPER 100	x 76	y 21		
BULB FLAT (76 MM)			TYPE S	ALLOY 6082	TEMPER T6	Ix 11 460	Iy 293 449		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
985-064	Scale (1 : 2)		MASS 0.759	APER 122	PPER 100	x 50	y 14		
50MM BULB FLAT			TYPE S	ALLOY 6082	TEMPER T6	Ix 2 545	Iy 68 091		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
985-065	Scale (1 : 3)		MASS 1.414	APER 182	PPER 100	x 76	y 19		
76.2MM BULB FLAT			TYPE S	ALLOY 6082	TEMPER T6	Ix 9 123	Iy 297 760		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
985-066	Scale (1 : 2)		MASS 0.807	APER 126	PPER 100	x 50	y 15		
BULB FLAT (50 MM)			TYPE S	ALLOY 6082	TEMPER T6	Ix 2 783	Iy 72 424		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
985-070	Scale (1 : 2)		MASS 0.532	APER 138	PPER 138	x 39	y 24		
GUNWALE 39MM			TYPE S	ALLOY 6063	TEMPER T582	Ix 9 689	Iy 36 353		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
985-071	Scale (1 : 3)		MASS 0.745	APER 174	PPER 100	x 50	y 30		
GUNWALE 50MM			TYPE S	ALLOY 6063	TEMPER T582	Ix 21 428	Iy 84 192		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
985-072	Scale (1 : 3)		MASS 0.851	APER 223	PPER 223	x 54	y 52		
CHINE SECTION			TYPE S	ALLOY 6063	TEMPER T5	Ix 83 914	Iy 62 820		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
985-073	Scale (1 : 3)		MASS 3.503	APER 411	PPER 411	x 142	y 50		
MILL DE BURR			TYPE S	ALLOY 6106	TEMPER T6	Ix 206 203	Iy 2 771 366		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
985-077	Scale (1 : 4)		MASS 5.251	APER 456	PPER 456	x 180	y 60		
180 X 60 X 8/4 TEE			TYPE S	ALLOY NV6082	TEMPER T6	Ix 114 038	Iy 6 476 987		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
985-079	Scale (1 : 5)		MASS 4.877	APER 733	PPER 733	x 230	y 90		
WING DECK EXTRUSION			TYPE C	ALLOY 6082	TEMPER T6	Ix 2 593 437	Iy 8 666 495		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
985-080	Scale (1 : 3)		MASS 1.870	APER 350	PPER 350	x 104	y 54		
COVER			TYPE S	ALLOY 6082	TEMPER T6	Ix 163 221	Iy 979 020		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
985-081	Scale (1 : 1)		MASS 0.187	APER 100	PPER 100	x 34	y 10		
TOP HAT			TYPE S	ALLOY 6106	TEMPER T6	Ix 880	Iy 4 207		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			



985 Series Sections

SECTION PROPERTIES

985-082 Scale (1 : 5) 208 X 80 X 6/8 TEE SECTION CURRENT NL		MASS 5.025 APER 568 PPER 568 TYPE S ALLOY NV6082 TEMPER T6	Ix 343 883 Iy 8 565 868 x 208 y 80	40 Kg Pack 0 Len 1 0 Len 2 0
985-085 Scale (1 : 3) GUNNEL CURRENT NL		MASS 3.523 APER 240 PPER 240 TYPE S ALLOY 6063 TEMPER T6	Ix 33 910 Iy 855 833 x 100 y 20	40 Kg Pack 0 Len 1 0 Len 2 0
985-096 Scale (1 : 7) FLOOR PLANK CURRENT NL		MASS 2.942 APER 948 PPER 474 TYPE S ALLOY NV6082 TEMPER T6	Ix 155 338 Iy 10 157 728 x 331 y 33	40 Kg Pack 0 Len 1 0 Len 2 0
985-097 Scale (1 : 6) WINDOW MULLION CURRENT NL		MASS 6.810 APER 359 PPER 359 TYPE B ALLOY NV6082 TEMPER T6	Ix 3 618 068 Iy 2 273 863 x 100 y 100	40 Kg Pack 1 Len 1 0 Len 2 0
985-099 Scale (1 : 3) BULB FLAT CURRENT NL		MASS 1.397 APER 182 PPER 182 TYPE S ALLOY 6351 TEMPER T5	Ix 8 672 Iy 294 591 x 76 y 19	40 Kg Pack 0 Len 1 0 Len 2 0
985-100 Scale (1 : 3) 98.70MM BULB FLAT CURRENT NL		MASS 1.718 APER 227 PPER 227 TYPE S ALLOY 6351 TEMPER T5	Ix 9 272 Iy 607 713 x 99 y 19	40 Kg Pack 0 Len 1 0 Len 2 0
985-102 Scale (1 : 2) 40MM BULB FLAT CURRENT NL		MASS 0.853 APER 111 PPER 111 TYPE S ALLOY NV6082 TEMPER T6	Ix 9 123 Iy 40 046 x 40 y 20	40 Kg Pack 0 Len 1 0 Len 2 0
985-107 Scale (1 : 10) TUNNEL EXTRUSION CURRENT NL		MASS 4.485 APER 696 PPER 348 TYPE B ALLOY NV6082 TEMPER T6	Ix 694 561 Iy 10 169 665 x 320 y 60	40 Kg Pack 0 Len 1 0 Len 2 0
985-112 Scale (1 : 9) PONTOON DECK CURRENT NL		MASS 6.070 APER 720 PPER 360 TYPE S ALLOY 6082 TEMPER T6	Ix 2 472 180 Iy 11 529 186 x 192 y 119	40 Kg Pack 0 Len 1 0 Len 2 0
985-116 Scale (1 : 8) 180 X 100 X 6 X 9 CHANNEL CURRENT NL		MASS 7.897 APER 780 PPER 780 TYPE S ALLOY NC6082 TEMPER T6	Ix 3 421 156 Iy 16 113 188 x 180 y 100	40 Kg Pack 0 Len 1 0 Len 2 0
985-120 Scale (1 : 8) 160 X 106 RHS CURRENT NL		MASS 8.165 APER 521 PPER 521 TYPE A ALLOY 6082 TEMPER T6	Ix 5 542 784 Iy 10 570 189 x 160 y 106	40 Kg Pack 0 Len 1 0 Len 2 0
985-126 Scale (1 : 5) 150MM BULB FLAT CURRENT NL		MASS 2.695 APER 330 PPER 165 TYPE S ALLOY 6082 TEMPER T6	Ix 10 245 Iy 2 118 311 x 150 y 19	40 Kg Pack 0 Len 1 0 Len 2 0













985 Series Sections

SECTION PROPERTIES

985-127 Scale (1 : 10) SPONSON CURRENT NL		<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 187</td> <td>y 120</td> </tr> <tr> <td>7.441</td> <td>726</td> <td>363</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>4 014 049</td> </tr> <tr> <td>S</td> <td>NV6082</td> <td>T6</td> <td>Iy</td> <td>11 707 518</td> </tr> </table>	MASS	APER	PPER	x 187	y 120	7.441	726	363			TYPE	ALLOY	TEMPER	Ix	4 014 049	S	NV6082	T6	Iy	11 707 518																																
MASS	APER	PPER	x 187	y 120																																																		
7.441	726	363																																																				
TYPE	ALLOY	TEMPER	Ix	4 014 049																																																		
S	NV6082	T6	Iy	11 707 518																																																		
<table border="1"> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>		40 Kg Pack	0	Len 1	Len 2							0	0					<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 80</td> <td>y 100</td> </tr> <tr> <td>3.808</td> <td>321</td> <td>160</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>2 178 561</td> </tr> <tr> <td>B</td> <td>NV6082</td> <td>T6</td> <td>Iy</td> <td>752 418</td> </tr> </table> <table border="1"> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	MASS	APER	PPER	x 80	y 100	3.808	321	160			TYPE	ALLOY	TEMPER	Ix	2 178 561	B	NV6082	T6	Iy	752 418	40 Kg Pack	0	Len 1	Len 2							0	0				
40 Kg Pack	0	Len 1	Len 2																																																			
		0	0																																																			
MASS	APER	PPER	x 80	y 100																																																		
3.808	321	160																																																				
TYPE	ALLOY	TEMPER	Ix	2 178 561																																																		
B	NV6082	T6	Iy	752 418																																																		
40 Kg Pack	0	Len 1	Len 2																																																			
		0	0																																																			
985-128 Scale (1 : 8) WINDOW POST CURRENT NL		<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 80</td> <td>y 100</td> </tr> <tr> <td>3.808</td> <td>321</td> <td>160</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>2 178 561</td> </tr> <tr> <td>B</td> <td>NV6082</td> <td>T6</td> <td>Iy</td> <td>752 418</td> </tr> </table> <table border="1"> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	MASS	APER	PPER	x 80	y 100	3.808	321	160			TYPE	ALLOY	TEMPER	Ix	2 178 561	B	NV6082	T6	Iy	752 418	40 Kg Pack	0	Len 1	Len 2							0	0																				
MASS	APER	PPER	x 80	y 100																																																		
3.808	321	160																																																				
TYPE	ALLOY	TEMPER	Ix	2 178 561																																																		
B	NV6082	T6	Iy	752 418																																																		
40 Kg Pack	0	Len 1	Len 2																																																			
		0	0																																																			



986 Series Sections

SECTION PROPERTIES

986-001	Scale (1 : 2)		MASS 0.459	APER 290	PPER 146	x 45	y 34		
HEAD CHANNEL			TYPE S	ALLOY 6063	TEMPER T6	Ix 23 574	Iy 48 985		
CURRENT	STOCKED		40 Kg Pack 12	Len 1 6000	Len 2 0	MILL 182			
986-002	Scale (1 : 1)		MASS 0.050	APER 19	PPER 100	x 6	y 5		
TILT ROD			TYPE S	ALLOY 6063	TEMPER T6	Ix 33	Iy 33		
CURRENT	STOCKED		40 Kg Pack 133	Len 1 6000	Len 2 0	MILL 1167			
986-003	Scale (1 : 1)		MASS 0.055	APER 21	PPER 100	x 6	y 6		
4 WAY CONTROL ROD			TYPE S	ALLOY 6063	TEMPER T6	Ix 37	Iy 37		
CURRENT	STOCKED		40 Kg Pack 121	Len 1 6000	Len 2 0	MILL 1061			
986-005	Scale (1 : 2)		MASS 0.246	APER 132	PPER 100	x 20	y 16		
CURTAIN TRACK			TYPE S	ALLOY 6060SF	TEMPER T582	Ix 2 982	Iy 4 683		
CURRENT	NIL		40 Kg Pack 25	Len 1 6000	Len 2 0				
986-010	Scale (1 : 1)		MASS 0.167	APER 115	PPER 100	x 24	y 11		
STYLE LINE CURTAIN TRACK			TYPE S	ALLOY 6063	TEMPER T5	Ix 966	Iy 3 572		
CURRENT	NIL		40 Kg Pack 25	Len 1 6000	Len 2 0				
986-012	Scale (1 : 5)		MASS 1.091	APER 444	PPER 444	x 92	y 92		
PELMET BRACKET			TYPE S	ALLOY 6063	TEMPER T6	Ix 292 363	Iy 254 975		
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0				
986-018	Scale (1 : 2)		MASS 0.333	APER 109	PPER 100	x 16	y 24		
TRACK			TYPE B	ALLOY 6063	TEMPER T6	Ix 8 032	Iy 4 363		
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0				
986-023	Scale (1 : 4)		MASS 0.439	APER 140	PPER 115	x 14	y 50		
BLIND SECTION			TYPE C	ALLOY 6063	TEMPER T6	Ix 36 801	Iy 5 482		
CURRENT	NIL		40 Kg Pack 12	Len 1 6000	Len 2 0				
986-042	Scale (1 : 2)		MASS 0.419	APER 309	PPER 154	x 47	y 35		
HEAD TRACK			TYPE S	ALLOY 6063	TEMPER T5	Ix 24 055	Iy 49 621		
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0				
986-043	Scale (1 : 2)		MASS 0.433	APER 304	PPER 152	x 49	y 26		
HEAD CHANNEL			TYPE S	ALLOY 6063	TEMPER T6	Ix 12 896	Iy 53 199		
CURRENT	STOCKED		40 Kg Pack 12	Len 1 6400	Len 2 0	MILL 126			
986-044	Scale (1 : 2)		MASS 0.262	APER 122	PPER 100	x 22	y 22		
BOTTOM RAIL / CLOSED			TYPE D	ALLOY 6063	TEMPER T5	Ix 3 802	Iy 4 722		
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0				
986-047	Scale (1 : 1)		MASS 0.176	APER 115	PPER 100	x 24	y 11		
CURTAIN TRACK			TYPE S	ALLOY 606043	TEMPER T582	Ix 1 093	Iy 3 914		
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0				


986 Series Sections

SECTION PROPERTIES

986-051 Scale (1 : 2) CLOSED BOTTOM RAIL LGE HOLLOW CURRENT NL		MASS 0.270 TYPE D	APER 124 ALLOY 6063	PPER 100 TEMPER T6	x 23 y 23 I_x I_y	4 058 5 086
		40 Kg Pack 24	Len 1 6000	Len 2 0		
986-053 Scale (1 : 4) 45MM ROLLER TUBE - HEAVY CURRENT NL		MASS 0.955 TYPE B	APER 200 ALLOY 6063	PPER 200 TEMPER T6	x 48 y 49 I_x I_y	88 442 87 001
		40 Kg Pack 0	Len 1 0	Len 2 0		

989 Series Sections

SECTION PROPERTIES


989-004 Scale (1 : 4) CORNER OR GUTTER CURRENT NL		<table border="1"> <tr> <td>MASS 1.044</td> <td>APER 494</td> <td>PPER 247</td> <td>x 75</td> <td>y 75</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T5</td> <td>Ix 238 348</td> <td>Iy 260 709</td> </tr> </table>	MASS 1.044	APER 494	PPER 247	x 75	y 75	TYPE S	ALLOY 6063	TEMPER T5	Ix 238 348	Iy 260 709																				
MASS 1.044	APER 494	PPER 247	x 75	y 75																												
TYPE S	ALLOY 6063	TEMPER T5	Ix 238 348	Iy 260 709																												
<table border="1"> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>0</td> <td>Len 2</td> <td>0</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>		40 Kg Pack	0	Len 1	0	Len 2	0					<table border="1"> <tr> <td>MASS 2.521</td> <td>APER 402</td> <td>PPER 366</td> <td>x 135</td> <td>y 44</td> </tr> <tr> <td>TYPE B</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix 328 217</td> <td>Iy 2 019 550</td> </tr> </table> <table border="1"> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>0</td> <td>Len 2</td> <td>0</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	MASS 2.521	APER 402	PPER 366	x 135	y 44	TYPE B	ALLOY 6063	TEMPER T6	Ix 328 217	Iy 2 019 550	40 Kg Pack	0	Len 1	0	Len 2	0				
40 Kg Pack	0	Len 1	0	Len 2	0																											
MASS 2.521	APER 402	PPER 366	x 135	y 44																												
TYPE B	ALLOY 6063	TEMPER T6	Ix 328 217	Iy 2 019 550																												
40 Kg Pack	0	Len 1	0	Len 2	0																											

990 Series Sections

SECTION PROPERTIES

990 Page 1 14-Oct-18

990-001 Scale (1 : 1)
WALLBOARD JOINER
CURRENT NL



MASS 0.195	APER 138	PPER 138	x 34	y 9
TYPE S	ALLOY 6063	TEMPER T5	Ix Iy	787 5 781
40 Kg Pack	0	Len 1 0	Len 2 0	













991 Series Sections

SECTION PROPERTIES

991-001	Scale (1 : 2)		MASS 0.941	APER 277	PPER 146	x 92	y 25
COOL ROOM SUITE	CURRENT		TYPE S	ALLOY 6063	TEMPER T5	Ix 12 135	Iy 340 522
			40 Kg Pack	0	Len 1 0	Len 2 0	
991-002	Scale (1 : 2)		MASS 0.523	APER 227	PPER 120	x 56	y 30
COOL ROOM SUITE	CURRENT		TYPE S	ALLOY 6060	TEMPER T5	Ix 18 515	Iy 97 864
			40 Kg Pack	0	Len 1 0	Len 2 0	
991-003	Scale (1 : 3)		MASS 0.671	APER 316	PPER 164	x 81	y 38
COOL ROOM SUITE	CURRENT		TYPE S	ALLOY 6063	TEMPER T5	Ix 37 746	Iy 264 458
			40 Kg Pack	0	Len 1 0	Len 2 0	
991-005	Scale (1 : 3)		MASS 0.489	APER 183	PPER 100	x 50	y 50
COOL ROOM SUITE	CURRENT		TYPE S	ALLOY 6063	TEMPER T5	Ix 43 257	Iy 43 257
			40 Kg Pack	0	Len 1 0	Len 2 0	
991-007	Scale (1 : 2)		MASS 0.361	APER 119	PPER 100	x 35	y 35
COOL ROOM SUITE	CURRENT		TYPE S	ALLOY 6063	TEMPER T5	Ix 13 690	Iy 13 690
			40 Kg Pack	0	Len 1 0	Len 2 0	
991-008	Scale (1 : 2)		MASS 0.295	APER 145	PPER 100	x 51	y 18
COOL ROOM SUITE	CURRENT		TYPE S	ALLOY 6063	TEMPER T5	Ix 2 022	Iy 22 566
			40 Kg Pack	0	Len 1 0	Len 2 0	
991-009	Scale (1 : 3)		MASS 0.592	APER 259	PPER 149	x 58	y 42
COOL ROOM SUITE	CURRENT		TYPE S	ALLOY 6063	TEMPER T5	Ix 23 283	Iy 121 013
			40 Kg Pack	0	Len 1 0	Len 2 0	
991-010	Scale (1 : 6)		MASS 1.495	APER 419	PPER 210	x 68	y 110
COOL ROOM SUITE	CURRENT		TYPE S	ALLOY 6060	TEMPER T5	Ix 1 009 984	Iy 88 398
			40 Kg Pack	0	Len 1 0	Len 2 0	
991-011	Scale (1 : 4)		MASS 0.577	APER 268	PPER 134	x 56	y 60
WALL FOOT FIXING MOULD	CURRENT		TYPE S	ALLOY 6063	TEMPER T6	Ix 41 984	Iy 103 319
			40 Kg Pack	0	Len 1 0	Len 2 0	
991-012	Scale (1 : 3)		MASS 0.509	APER 264	PPER 132	x 53	y 40
I-BEAM	CURRENT		TYPE S	ALLOY 6063	TEMPER T6	Ix 14 948	Iy 91 538
			40 Kg Pack	0	Len 1 0	Len 2 0	
991-013	Scale (1 : 3)		MASS 2.860	APER 428	PPER 428	x 110	y 50
DOOR TRACK	CURRENT		TYPE S	ALLOY 6063	TEMPER T6	Ix 329 902	Iy 981 399
			40 Kg Pack	0	Len 1 0	Len 2 0	
991-017	Scale (1 : 3)		MASS 0.532	APER 220	PPER 110	x 70	y 40
ANGLE (COOLROOM)	CURRENT		TYPE S	ALLOY 6063	TEMPER T6	Ix 26 433	Iy 106 224
			40 Kg Pack	0	Len 1 0	Len 2 0	






991 Series Sections

SECTION PROPERTIES

991-018	Scale (1 : 5)		MASS 2.014	APER 528	PPER 265	x 218	y 25
CHANNEL			TYPE S	ALLOY 6063	TEMPER T6	I_x 16 524	I_y 3 628 231
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
991-019	Scale (1 : 2)		MASS 0.637	APER 302	PPER 151	x 81	y 36
COOL ROOM 81 CHANNEL			TYPE S	ALLOY 6063	TEMPER T6	I_x 31 958	I_y 245 226
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
991-020	Scale (1 : 4)		MASS 1.321	APER 428	PPER 216	x 168	y 25
COOLROOM 168 CHANNEL			TYPE S	ALLOY 6063	TEMPER T6	I_x 11 921	I_y 1 455 766
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
991-023	Scale (1 : 5)		MASS 0.622	APER 309	PPER 154	x 51	y 54
I-BEAM			TYPE S	ALLOY 6063	TEMPER T6	I_x 122 037	I_y 33 177
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
991-036	Scale (1 : 3)		MASS 0.655	APER 305	PPER 157	x 104	y 25
100MM PANEL CHANNEL			TYPE S	ALLOY 6063	TEMPER T6	I_x 11 526	I_y 347 926
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
991-041	Scale (1 : 3)		MASS 0.612	APER 305	PPER 156	x 78	y 38
75MM BASE CHANNEL			TYPE S	ALLOY 6063	TEMPER T6	I_x 32 135	I_y 218 416
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
991-042	Scale (1 : 3)		MASS 0.713	APER 355	PPER 181	x 103	y 38
100MM BASE CHANNEL			TYPE S	ALLOY 6063	TEMPER T6	I_x 34 799	I_y 416 663
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
991-043	Scale (1 : 2)		MASS 0.508	APER 249	PPER 130	x 54	y 37
INTERNAL DOOR FRAME			TYPE S	ALLOY 6060	TEMPER T5	I_x 16 824	I_y 82 542
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
991-046	Scale (1 : 3)		MASS 0.359	APER 181	PPER 100	x 40	y 40
COVING MALE			TYPE S	ALLOY 6063	TEMPER T6	I_x 18 523	I_y 18 502
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
991-047	Scale (1 : 2)		MASS 0.299	APER 145	PPER 145	x 32	y 32
COVING FEMALE			TYPE S	ALLOY 6063	TEMPER T6	I_x 10 275	I_y 10 242
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
991-050	Scale (1 : 6)		MASS 0.801	APER 261	PPER 131	x 77	y 77
RADIUS COVING SECTION			TYPE S	ALLOY 6060	TEMPER T5	I_x 176 520	I_y 176 520
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
991-051	Scale (1 : 4)		MASS 1.183	APER 460	PPER 230	x 155	y 38
150MM BASE CHANNEL			TYPE S	ALLOY 6063	TEMPER T5	I_x 50 230	I_y 1 365 332
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	







991 Series Sections

SECTION PROPERTIES

<p>991-058 Scale (1 : 3) 105.43 X 36 X 1.5 COOLROOM CHA</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 0.737</td> <td>APER 351</td> <td>PPER 351</td> <td>x 105</td> <td>y 36</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6060</td> <td>TEMPER T5</td> <td>Ix Iy</td> <td>34 592 452 444</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.737	APER 351	PPER 351	x 105	y 36	TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	34 592 452 444	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.737	APER 351	PPER 351	x 105	y 36												
TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	34 592 452 444												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>991-059 Scale (1 : 2) ANGLE TRIM</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 0.245</td> <td>APER 120</td> <td>PPER 100</td> <td>x 30</td> <td>y 30</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T5</td> <td>Ix Iy</td> <td>7 526 7 526</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.245	APER 120	PPER 100	x 30	y 30	TYPE S	ALLOY 6063	TEMPER T5	Ix Iy	7 526 7 526	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.245	APER 120	PPER 100	x 30	y 30												
TYPE S	ALLOY 6063	TEMPER T5	Ix Iy	7 526 7 526												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>991-061 Scale (1 : 4) MINI DOOR TRACK</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 1.338</td> <td>APER 285</td> <td>PPER 285</td> <td>x 30</td> <td>y 72</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6060</td> <td>TEMPER T5</td> <td>Ix Iy</td> <td>340 035 49 215</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 1.338	APER 285	PPER 285	x 30	y 72	TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	340 035 49 215	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 1.338	APER 285	PPER 285	x 30	y 72												
TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	340 035 49 215												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>991-062 Scale (1 : 4) "F" JOINER</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 0.624</td> <td>APER 256</td> <td>PPER 128</td> <td>x 47</td> <td>y 60</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6060</td> <td>TEMPER T5</td> <td>Ix Iy</td> <td>71 099 41 026</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.624	APER 256	PPER 128	x 47	y 60	TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	71 099 41 026	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.624	APER 256	PPER 128	x 47	y 60												
TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	71 099 41 026												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>991-066 Scale (1 : 5) CNR SECTION</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 0.517</td> <td>APER 208</td> <td>PPER 185</td> <td>x 73</td> <td>y 54</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6060</td> <td>TEMPER T5</td> <td>Ix Iy</td> <td>49 758 85 345</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.517	APER 208	PPER 185	x 73	y 54	TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	49 758 85 345	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.517	APER 208	PPER 185	x 73	y 54												
TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	49 758 85 345												
40 Kg Pack 0	Len 1 0	Len 2 0														




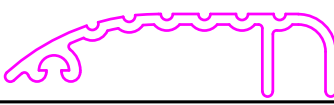



992 Series Sections

SECTION PROPERTIES

992-003 Scale (1 : 2) PARTITION SUITE CURRENT NL		<table border="1"> <tr> <td>MASS 0.324</td> <td>APER 181</td> <td>PPER 181</td> <td>x 26</td> <td>y 32</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix 14 303</td> <td>Iy 8 780</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.324	APER 181	PPER 181	x 26	y 32	TYPE S	ALLOY 6063	TEMPER T6	Ix 14 303	Iy 8 780	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.324	APER 181	PPER 181	x 26	y 32													
TYPE S	ALLOY 6063	TEMPER T6	Ix 14 303	Iy 8 780													
40 Kg Pack 0	Len 1 0	Len 2 0															
992-005 Scale (1 : 2) PARTITION SUITE CURRENT NL		<table border="1"> <tr> <td>MASS 0.238</td> <td>APER 120</td> <td>PPER 120</td> <td>x 19</td> <td>y 24</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix 7 985</td> <td>Iy 1 721</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.238	APER 120	PPER 120	x 19	y 24	TYPE S	ALLOY 6063	TEMPER T6	Ix 7 985	Iy 1 721	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.238	APER 120	PPER 120	x 19	y 24													
TYPE S	ALLOY 6063	TEMPER T6	Ix 7 985	Iy 1 721													
40 Kg Pack 0	Len 1 0	Len 2 0															
992-010 Scale (1 : 2) 19MM PARTITION JOINER CURRENT NL		<table border="1"> <tr> <td>MASS 0.280</td> <td>APER 149</td> <td>PPER 100</td> <td>x 22</td> <td>y 25</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix 3 635</td> <td>Iy 8 751</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.280	APER 149	PPER 100	x 22	y 25	TYPE S	ALLOY 6063	TEMPER T6	Ix 3 635	Iy 8 751	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.280	APER 149	PPER 100	x 22	y 25													
TYPE S	ALLOY 6063	TEMPER T6	Ix 3 635	Iy 8 751													
40 Kg Pack 0	Len 1 0	Len 2 0															
992-014 Scale (1 : 2) FRAME MEMBER CURRENT NL		<table border="1"> <tr> <td>MASS 0.444</td> <td>APER 133</td> <td>PPER 133</td> <td>x 20</td> <td>y 30</td> </tr> <tr> <td>TYPE B</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix 16 537</td> <td>Iy 9 905</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.444	APER 133	PPER 133	x 20	y 30	TYPE B	ALLOY 6063	TEMPER T6	Ix 16 537	Iy 9 905	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.444	APER 133	PPER 133	x 20	y 30													
TYPE B	ALLOY 6063	TEMPER T6	Ix 16 537	Iy 9 905													
40 Kg Pack 0	Len 1 0	Len 2 0															
992-016 Scale (1 : 3) LIVE HINGE PART NO 1 CURRENT NL		<table border="1"> <tr> <td>MASS 0.573</td> <td>APER 140</td> <td>PPER 140</td> <td>x 21</td> <td>y 30</td> </tr> <tr> <td>TYPE B</td> <td>ALLOY 6063</td> <td>TEMPER T5</td> <td>Ix 16 334</td> <td>Iy 10 049</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.573	APER 140	PPER 140	x 21	y 30	TYPE B	ALLOY 6063	TEMPER T5	Ix 16 334	Iy 10 049	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.573	APER 140	PPER 140	x 21	y 30													
TYPE B	ALLOY 6063	TEMPER T5	Ix 16 334	Iy 10 049													
40 Kg Pack 0	Len 1 0	Len 2 0															
992-022 Scale (1 : 3) CORNER CURRENT NL		<table border="1"> <tr> <td>MASS 0.594</td> <td>APER 194</td> <td>PPER 194</td> <td>x 30</td> <td>y 30</td> </tr> <tr> <td>TYPE B</td> <td>ALLOY 6063</td> <td>TEMPER T5</td> <td>Ix 19 820</td> <td>Iy 19 820</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.594	APER 194	PPER 194	x 30	y 30	TYPE B	ALLOY 6063	TEMPER T5	Ix 19 820	Iy 19 820	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.594	APER 194	PPER 194	x 30	y 30													
TYPE B	ALLOY 6063	TEMPER T5	Ix 19 820	Iy 19 820													
40 Kg Pack 0	Len 1 0	Len 2 0															













993 Series Sections

SECTION PROPERTIES

<p>993-006 Scale (1 : 1) WEATHER SEAL CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 0.162</td> <td>APER 86</td> <td>PPER 100</td> <td>x 31</td> <td>y 7</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix Iy</td> <td>123 6 744</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.162	APER 86	PPER 100	x 31	y 7	TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	123 6 744	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.162	APER 86	PPER 100	x 31	y 7												
TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	123 6 744												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>993-007 Scale (1 : 1) WEATHER SEAL CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 0.111</td> <td>APER 71</td> <td>PPER 100</td> <td>x 26</td> <td>y 8</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix Iy</td> <td>147 2 096</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.111	APER 71	PPER 100	x 26	y 8	TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	147 2 096	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.111	APER 71	PPER 100	x 26	y 8												
TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	147 2 096												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>993-008 Scale (1 : 1) DOOR WEATHER SEAL CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 0.272</td> <td>APER 139</td> <td>PPER 100</td> <td>x 44</td> <td>y 11</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix Iy</td> <td>788 19 998</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.272	APER 139	PPER 100	x 44	y 11	TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	788 19 998	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.272	APER 139	PPER 100	x 44	y 11												
TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	788 19 998												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>993-009 Scale (1 : 1) DOOR WEATHER SEAL CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 0.290</td> <td>APER 148</td> <td>PPER 100</td> <td>x 44</td> <td>y 11</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix Iy</td> <td>956 20 939</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.290	APER 148	PPER 100	x 44	y 11	TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	956 20 939	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.290	APER 148	PPER 100	x 44	y 11												
TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	956 20 939												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>993-010 Scale (1 : 2) CARPET TRIM CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 0.266</td> <td>APER 178</td> <td>PPER 100</td> <td>x 40</td> <td>y 26</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix Iy</td> <td>4 919 17 704</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.266	APER 178	PPER 100	x 40	y 26	TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	4 919 17 704	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.266	APER 178	PPER 100	x 40	y 26												
TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	4 919 17 704												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>993-011 Scale (1 : 1) H SECTION CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 0.091</td> <td>APER 66</td> <td>PPER 100</td> <td>x 21</td> <td>y 6</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T6</td> <td>Ix Iy</td> <td>167 1 054</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.091	APER 66	PPER 100	x 21	y 6	TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	167 1 054	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.091	APER 66	PPER 100	x 21	y 6												
TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	167 1 054												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>993-016 Scale (1 : 1) CARPET TRIM CURRENT NL</p> 	<table border="1"> <tr> <td>MASS 0.143</td> <td>APER 74</td> <td>PPER 100</td> <td>x 32</td> <td>y 9</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T5</td> <td>Ix Iy</td> <td>258 4 324</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.143	APER 74	PPER 100	x 32	y 9	TYPE S	ALLOY 6063	TEMPER T5	Ix Iy	258 4 324	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 0.143	APER 74	PPER 100	x 32	y 9												
TYPE S	ALLOY 6063	TEMPER T5	Ix Iy	258 4 324												
40 Kg Pack 0	Len 1 0	Len 2 0														

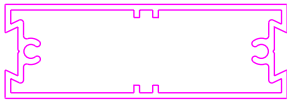









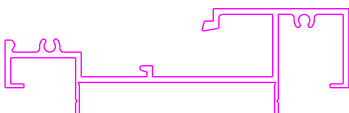
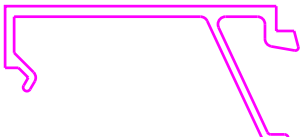
994 Series Sections

SECTION PROPERTIES

994-001	Scale (1 : 2)		MASS 0.452	APER 197	PPER 100	x 45	y 25		
PARTITION SUIT FRAME			TYPE S	ALLOY 6063	TEMPER T6	Ix 11 770	Iy 41 170		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
994-002	Scale (1 : 2)		MASS 0.502	APER 205	PPER 102	x 45	y 23		
PARTITION DOOR JAMB			TYPE S	ALLOY 6063	TEMPER T6	Ix 5 489	Iy 43 490		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
994-003	Scale (1 : 2)		MASS 0.245	APER 117	PPER 100	x 15	y 21		
PARTITION SUITE BEAD			TYPE S	ALLOY 6063	TEMPER T6	Ix 4 370	Iy 2 168		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
994-005	Scale (1 : 3)		MASS 0.426	APER 239	PPER 119	x 100	y 5		
100MM SKIRTING			TYPE S	ALLOY 6063	TEMPER T6	Ix 345	Iy 138 730		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
994-006	Scale (1 : 3)		MASS 0.583	APER 288	PPER 144	x 125	y 5		
125 MM SKIRTING			TYPE S	ALLOY 6063	TEMPER T6	Ix 388	Iy 296 333		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
994-007	Scale (1 : 4)		MASS 0.684	APER 338	PPER 338	x 150	y 5		
150MM SKIRTING			TYPE S	ALLOY 6063	TEMPER T6	Ix 408	Iy 504 685		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
994-009	Scale (1 : 3)		MASS 0.494	APER 233	PPER 117	x 102	y 5		
SKIRTING			TYPE S	ALLOY 6060	TEMPER T5	Ix 331	Iy 168 402		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
994-013	Scale (1 : 5)		MASS 1.752	APER 959	PPER 479	x 200	y 50		
200 MM SKIRTING DUCT			TYPE D	ALLOY 6063	TEMPER T6	Ix 230 610	Iy 2 909 668		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
994-020	Scale (1 : 2)		MASS 0.557	APER 272	PPER 136	x 48	y 32		
JOINER			TYPE S	ALLOY 6060	TEMPER T5	Ix 15 541	Iy 20 920		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
994-021	Scale (1 : 1)		MASS 0.235	APER 149	PPER 106	x 44	y 9		
PARTITION JOINER			TYPE S	ALLOY 6060	TEMPER T5	Ix 578	Iy 10 042		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
994-026	Scale (1 : 1)		MASS 0.277	APER 121	PPER 100	x 47	y 8		
COVER STRIP			TYPE S	ALLOY 6060	TEMPER T5	Ix 680	Iy 14 894		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
994-028	Scale (1 : 2)		MASS 0.370	APER 198	PPER 100	x 48	y 26		
WALL JOINER			TYPE S	ALLOY 6060	TEMPER T5	Ix 4 303	Iy 49 706		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			

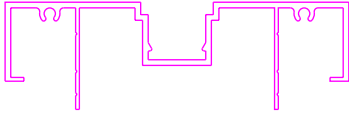











994 Series Sections

SECTION PROPERTIES

994-030	Scale (1 : 2)		MASS 0.992	APER 221	PPER 221	x 75	y 25		
RAIL			TYPE B	ALLOY 6063	TEMPER T6	Ix 36 606	Iy 253 106		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
994-036	Scale (1 : 2)		MASS 0.856	APER 148	PPER 100	x 50	y 12		
JOINER			TYPE S	ALLOY 6060	TEMPER T5	Ix 2 639	Iy 75 279		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
994-037	Scale (1 : 2)		MASS 0.600	APER 222	PPER 111	x 46	y 32		
BULLNOSE			TYPE B	ALLOY 6063	TEMPER T6	Ix 19 820	Iy 29 132		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
994-039	Scale (1 : 1)		MASS 0.281	APER 92	PPER 100	x 39	y 4		
FLAT HINGE			TYPE S	ALLOY 6063	TEMPER T6	Ix 88	Iy 12 646		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
994-040	Scale (1 : 1)		MASS 0.209	APER 56	PPER 100	x 23	y 8		
STANDARD HINGE			TYPE S	ALLOY 6063	TEMPER T6	Ix 251	Iy 3 002		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
994-042	Scale (1 : 2)		MASS 0.888	APER 277	PPER 138	x 55	y 19		
JOINER			TYPE S	ALLOY 6060	TEMPER T5	Ix 12 859	Iy 64 110		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
994-043	Scale (1 : 2)		MASS 0.246	APER 131	PPER 100	x 55	y 6		
STOP END			TYPE S	ALLOY 6063	TEMPER T6	Ix 123	Iy 20 777		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
994-044	Scale (1 : 2)		MASS 0.295	APER 176	PPER 100	x 55	y 16		
TOP CAP			TYPE S	ALLOY 6063	TEMPER T6	Ix 3 489	Iy 43 478		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
994-045	Scale (1 : 1)		MASS 0.327	APER 148	PPER 100	x 45	y 11		
GLAZING BAR			TYPE S	ALLOY 6063	TEMPER T6	Ix 1 741	Iy 18 517		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
994-046	Scale (1 : 4)		MASS 0.554	APER 316	PPER 158	x 63	y 63		
EXTERNAL COVER			TYPE S	ALLOY 6063	TEMPER T6	Ix 96 768	Iy 96 768		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
994-047	Scale (1 : 2)		MASS 0.837	APER 424	PPER 212	x 91	y 29		
GLAZING BASE			TYPE S	ALLOY 6063	TEMPER T6	Ix 17 748	Iy 268 111		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				
994-048	Scale (1 : 1)		MASS 0.265	APER 150	PPER 100	x 39	y 18		
GLAZING BEAD			TYPE S	ALLOY 6063	TEMPER T6	Ix 2 201	Iy 16 687		
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0				

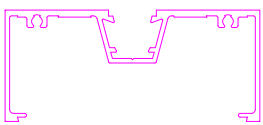
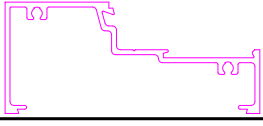

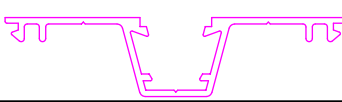








994 Series Sections

SECTION PROPERTIES

994-049	Scale (1 : 2)		MASS 0.877	APER 474	PPER 237	x 91	y 29		
POCKET GLAZING FRAME			TYPE S	ALLOY 6063	TEMPER T6	Ix 18 166	Iy 289 536		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
994-050	Scale (1 : 2)		MASS 0.789	APER 427	PPER 214	x 91	y 29		
HEAD			TYPE S	ALLOY 6063	TEMPER T6	Ix 16 138	Iy 286 546		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
994-051	Scale (1 : 2)		MASS 0.305	APER 119	PPER 100	x 19	y 24		
35MM DOOR STOP			TYPE S	ALLOY 6063	TEMPER T6	Ix 3 520	Iy 2 879		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
994-052	Scale (1 : 2)		MASS 0.305	APER 119	PPER 100	x 19	y 24		
45MM DOOR STOP			TYPE S	ALLOY 6060	TEMPER T5	Ix 3 520	Iy 4 028		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
994-058	Scale (1 : 3)		MASS 0.423	APER 239	PPER 120	x 100	y 5		
PARTITION SKIRTING BOARD			TYPE S	ALLOY 6063	TEMPER T5	Ix 374	Iy 140 390		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
994-060	Scale (1 : 2)		MASS 0.473	APER 216	PPER 108	x 45	y 25		
GLAZING CHANNEL			TYPE S	ALLOY 6060	TEMPER T5	Ix 10 927	Iy 40 569		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
994-063	Scale (1 : 3)		MASS 0.433	APER 235	PPER 117	x 100	y 5		
100MM SKIRTING			TYPE S	ALLOY 6063	TEMPER T5	Ix 373	Iy 142 010		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
994-064	Scale (1 : 3)		MASS 0.517	APER 282	PPER 141	x 125	y 5		
125MM SKIRTING AS 125			TYPE S	ALLOY 6063	TEMPER T5	Ix 386	Iy 278 701		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
994-065	Scale (1 : 3)		MASS 0.759	APER 411	PPER 206	x 90	y 30		
HEAD TRACK 90MM			TYPE S	ALLOY 6060	TEMPER T5	Ix 18 617	Iy 260 636		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
994-069	Scale (1 : 4)		MASS 0.821	APER 451	PPER 225	x 90	y 40		
SHADOW FRAME			TYPE S	ALLOY 6060	TEMPER T5	Ix 36 656	Iy 276 413		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
994-071	Scale (1 : 4)		MASS 0.501	APER 283	PPER 142	x 125	y 5		
76MM PARTITION SKIRTING BOARD			TYPE S	ALLOY 6060	TEMPER T5	Ix 341	Iy 257 263		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			
994-073	Scale (1 : 2)		MASS 0.254	APER 144	PPER 145	x 50	y 5		
50MM PARTITION SKIRTING BOARD			TYPE S	ALLOY 6060	TEMPER T5	Ix 253	Iy 16 466		
CURRENT	NL		40 Kg Pack	0	Len 1	Len 2			
				0	0	0			







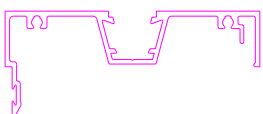





995 Series Sections

SECTION PROPERTIES

995-001	Scale (1 : 3)		MASS 1.507	APER 530	PPER 265	x 102	y 44
MAIN FRAME			TYPE S	ALLOY 6063	TEMPER T6	Ix 103 571	Iy 732 289
CURRENT	STOCKED		40 Kg Pack 4	Len 1 6500	Len 2 0	MILL 31	
995-002	Scale (1 : 3)		MASS 1.255	APER 450	PPER 225	x 102	y 44
SILL			TYPE S	ALLOY 6063	TEMPER T6	Ix 82 354	Iy 623 116
CURRENT	STOCKED		40 Kg Pack 4	Len 1 6500	Len 2 0	MILL 245	
995-003	Scale (1 : 2)		MASS 0.345	APER 181	PPER 100	x 44	y 22
SILL BEAD			TYPE S	ALLOY 6063	TEMPER T6	Ix 5 933	Iy 31 524
CURRENT	LOW USE		40 Kg Pack 16	Len 1 6500	Len 2 0	MILL 156	
995-004	Scale (1 : 2)		MASS 0.761	APER 312	PPER 156	x 91	y 21
POCKET FILLER			TYPE S	ALLOY 6063	TEMPER T6	Ix 13 619	Iy 168 999
CURRENT	STOCKED		40 Kg Pack 8	Len 1 6500	Len 2 0	MILL 202	
995-005	Scale (1 : 2)		MASS 0.187	APER 109	PPER 100	x 19	y 19
FLUSH FILLER			TYPE S	ALLOY 6063	TEMPER T6	Ix 2 499	Iy 2 341
CURRENT	LOW USE		40 Kg Pack 32	Len 1 6500	Len 2 0	MILL 206	
995-006	Scale (1 : 2)		MASS 0.302	APER 148	PPER 100	x 19	y 32
45MM DOOR STOPER			TYPE S	ALLOY 6063	TEMPER T6	Ix 7 286	Iy 2 645
CURRENT	LOW USE		40 Kg Pack 20	Len 1 6500	Len 2 0	MILL 127	
995-008	Scale (1 : 3)		MASS 1.562	APER 268	PPER 170	x 63	y 45
HINGE STILE			TYPE B	ALLOY 6063	TEMPER T6	Ix 162 933	Iy 275 357
CURRENT	STOCKED		40 Kg Pack 4	Len 1 6500	Len 2 0	MILL 49	
995-009	Scale (1 : 5)		MASS 1.550	APER 319	PPER 166	x 42	y 83
TOP RAIL			TYPE B	ALLOY 6063	TEMPER T6	Ix 337 502	Iy 159 809
CURRENT	LOW USE		40 Kg Pack 4	Len 1 6500	Len 2 0	MILL 50	
995-010	Scale (1 : 7)		MASS 1.925	APER 448	PPER 224	x 42	y 114
BOTTOM RAIL			TYPE B	ALLOY 6063	TEMPER T6	Ix 701 731	Iy 215 139
CURRENT	STOCKED		40 Kg Pack 2	Len 1 6500	Len 2 0	MILL 28	
995-011	Scale (1 : 3)		MASS 1.590	APER 301	PPER 230	x 68	y 45
DOUBLE WEATHER STRIP STILE			TYPE B	ALLOY 6063	TEMPER T6	Ix 173 585	Iy 318 383
CURRENT	LOW USE		40 Kg Pack 4	Len 1 6500	Len 2 0	MILL 34	
995-012	Scale (1 : 3)		MASS 1.632	APER 280	PPER 184	x 63	y 45
SLIDING DOOR STILE			TYPE B	ALLOY 6063	TEMPER T6	Ix 169 288	Iy 290 208
CURRENT	LOW USE		40 Kg Pack 4	Len 1 6500	Len 2 0	MILL 24	
995-013	Scale (1 : 3)		MASS 1.458	APER 263	PPER 233	x 61	y 45
LOCK STILE			TYPE B	ALLOY 6063	TEMPER T6	Ix 159 643	Iy 245 737
CURRENT	STOCKED		40 Kg Pack 4	Len 1 6500	Len 2 0	MILL 37	











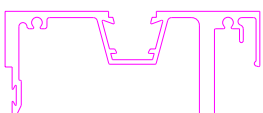

995 Series Sections

SECTION PROPERTIES

995-014	Scale (1 : 2)		MASS 0.203	APER 110	PPER 100	x 18	y 19		
GLAZING BEAD			TYPE S	ALLOY 6063	TEMPER T6	Ix 2 774	Iy 2 213		
CURRENT	LOW USE		40 Kg Pack	30	Len 1 6500	Len 2 0	MILL 189		
995-015	Scale (1 : 7)		MASS 1.945	APER 408	PPER 218	x 42	y 123		
MID RAIL			TYPE B	ALLOY 6063	TEMPER T6	Ix 1 054 758	Iy 195 924		
CURRENT	LOW USE		40 Kg Pack	2	Len 1 6500	Len 2 0	MILL 20		
995-016	Scale (1 : 3)		MASS 1.840	APER 358	PPER 358	x 38	y 54		
SPIGOT - DOOR FRAME			TYPE S	ALLOY 6063	TEMPER T6	Ix 194 492	Iy 120 704		
CURRENT	NIL		40 Kg Pack	2	Len 1 6500	Len 2 0			
995-017	Scale (1 : 2)		MASS 0.616	APER 209	PPER 100	x 94	y 7		
INFILL JACKSON CLOSER			TYPE S	ALLOY 6063	TEMPER T6	Ix 272	Iy 178 894		
CURRENT	LOW USE		40 Kg Pack	10	Len 1 6500	Len 2 0	MILL 62		
995-018	Scale (1 : 3)		MASS 0.953	APER 394	PPER 202	x 102	y 44		
JACKSON CLOSER HEAD			TYPE S	ALLOY 6063	TEMPER T6	Ix 79 136	Iy 573 861		
CURRENT	LOW USE		40 Kg Pack	6	Len 1 6500	Len 2 0	MILL 40		
995-019	Scale (1 : 2)		MASS 0.469	APER 206	PPER 103	x 91	y 6		
FLUSH FILLER			TYPE S	ALLOY 6063	TEMPER T6	Ix 256	Iy 138 546		
CURRENT	LOW USE		40 Kg Pack	14	Len 1 6500	Len 2 0	MILL 115		
995-020	Scale (1 : 3)		MASS 1.277	APER 484	PPER 242	x 102	y 42		
SELF MATING MULLION			TYPE S	ALLOY 6063	TEMPER T6	Ix 46 397	Iy 554 850		
CURRENT	LOW USE		40 Kg Pack	4	Len 1 6500	Len 2 0	MILL 60		
995-021	Scale (1 : 2)		MASS 0.302	APER 150	PPER 100	x 20	y 32		
35MM DOOR STOPER			TYPE S	ALLOY 6063	TEMPER T6	Ix 7 286	Iy 3 802		
CURRENT	LOW USE		40 Kg Pack	20	Len 1 6500	Len 2 0	MILL 178		
995-023	Scale (1 : 2)		MASS 0.326	APER 171	PPER 100	x 44	y 22		
GLAZING BEAD			TYPE S	ALLOY 6063	TEMPER T6	Ix 4 628	Iy 28 500		
CURRENT	STOCKED		40 Kg Pack	20	Len 1 6500	Len 2 0	MILL 118		
995-026	Scale (1 : 3)		MASS 0.674	APER 221	PPER 152	x 38	y 51		
SASH			TYPE B	ALLOY 6063	TEMPER T6	Ix 29 742	Iy 41 372		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-028	Scale (1 : 2)		MASS 0.875	APER 179	PPER 137	x 36	y 32		
DOOR STYLE			TYPE B	ALLOY 6063	TEMPER T6	Ix 36 531	Iy 47 193		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-029	Scale (1 : 6)		MASS 1.868	APER 424	PPER 251	x 33	y 102		
MID OR BOTTOM RAIL			TYPE B	ALLOY 6063	TEMPER T6	Ix 821 374	Iy 120 763		
CURRENT	STOCKED		40 Kg Pack	2	Len 1 6500	Len 2 0	MILL 21		



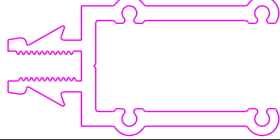









995 Series Sections

SECTION PROPERTIES

995-030	Scale (1 : 3)		MASS 1.154	APER 207	PPER 128	x 33	y 51		
TOP RAIL			TYPE B	ALLOY 6063	TEMPER T6	Ix 120 875	Iy 61 274		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-031	Scale (1 : 3)		MASS 0.932	APER 164	PPER 125	x 32	y 36		
DOOR STILE			TYPE B	ALLOY 6060A	TEMPER T581	Ix 51 040	Iy 42 653		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-032	Scale (1 : 3)		MASS 1.145	APER 214	PPER 173	x 56	y 36		
DOORSTILE			TYPE B	ALLOY 6063	TEMPER T6	Ix 77 169	Iy 169 572		
CURRENT	STOCKED		40 Kg Pack	4	Len 1 6500	Len 2 0	MILL 34		
995-033	Scale (1 : 3)		MASS 0.664	APER 218	PPER 189	x 38	y 53		
SASH			TYPE B	ALLOY 6063	TEMPER T6	Ix 28 046	Iy 43 658		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-035	Scale (1 : 3)		MASS 1.842	APER 262	PPER 262	x 55	y 55		
CORNER STAKE			TYPE S	ALLOY 6063	TEMPER T6	Ix 178 588	Iy 178 588		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-036	Scale (1 : 3)		MASS 1.051	APER 367	PPER 184	x 94	y 39		
T/G ADAPTOR (UP TO 12MM)			TYPE S	ALLOY 6063	TEMPER T6	Ix 80 384	Iy 198 706		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-037	Scale (1 : 2)		MASS 0.645	APER 176	PPER 176	x 37	y 33		
STILE			TYPE B	ALLOY 6063	TEMPER T6	Ix 32 099	Iy 38 449		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-038	Scale (1 : 5)		MASS 1.659	APER 410	PPER 205	x 60	y 93		
TOP TRACK			TYPE S	ALLOY 6063	TEMPER T6	Ix 509 054	Iy 194 486		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-039	Scale (1 : 5)		MASS 0.556	APER 215	PPER 108	x 7	y 91		
PELMET			TYPE S	ALLOY 6063	TEMPER T6	Ix 156 461	Iy 656		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-040	Scale (1 : 2)		MASS 1.021	APER 281	PPER 221	x 60	y 35		
BOTTOM GUIDE			TYPE S	ALLOY 6063	TEMPER T6	Ix 45 660	Iy 212 400		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-041	Scale (1 : 3)		MASS 2.226	APER 532	PPER 266	x 102	y 42		
H.D.MULLION			TYPE S	ALLOY 6063	TEMPER T6	Ix 111 592	Iy 971 652		
CURRENT	LOW USE		40 Kg Pack	2	Len 1 6500	Len 2 0	MILL 17		
995-042	Scale (1 : 5)		MASS 1.167	APER 412	PPER 206	x 117	y 58		
SUB SILL			TYPE S	ALLOY 6060	TEMPER T5	Ix 36 913	Iy 780 066		
CURRENT	NIL		40 Kg Pack	0	Len 1 0	Len 2 0			






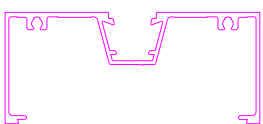

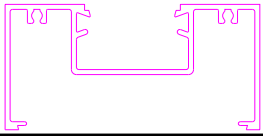


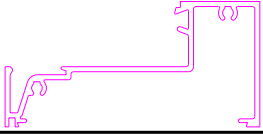

995 Series Sections

SECTION PROPERTIES

995-044	Scale (1 : 3)		MASS 0.924	APER 337	PPER 168	x 42	y 45
MIDRAIL			TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	63 275 85 231
CURRENT	LOW USE		40 Kg Pack 6	Len 1 6500	Len 2 0	MILL 58	
995-045	Scale (1 : 5)		MASS 3.282	APER 563	PPER 403	x 200	y 42
200 MIDRAIL			TYPE B	ALLOY 6063	TEMPER T6	Ix Iy	361 599 4 992 873
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
995-046	Scale (1 : 2)		MASS 1.830	APER 424	PPER 424	x 72	y 37
SPIGOT			TYPE S	ALLOY 6063	TEMPER T6	Ix Iy	100 016 267 304
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
995-047	Scale (1 : 4)		MASS 1.055	APER 447	PPER 223	x 102	y 45
OPEN BACK BOX W/SCREW FLUTES			TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	89 505 633 479
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
995-049	Scale (1 : 2)		MASS 0.630	APER 219	PPER 109	x 37	y 21
MIDRAIL ADAPTOR			TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	9 462 35 890
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
995-050	Scale (1 : 4)		MASS 1.330	APER 263	PPER 194	x 45	y 62
LIGHTWEIGHT HINGE STILE			TYPE B	ALLOY 6063	TEMPER T5	Ix Iy	244 732 138 035
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
995-052	Scale (1 : 4)		MASS 1.392	APER 297	PPER 227	x 45	y 69
PIVOT STILE WIDE			TYPE B	ALLOY 6063	TEMPER T6	Ix Iy	304 780 156 149
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
995-055	Scale (1 : 6)		MASS 1.317	APER 261	PPER 228	x 50	y 66
SASH			TYPE B	ALLOY 6063	TEMPER T5	Ix Iy	123 005 126 808
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		
995-056	Scale (1 : 6)		MASS 1.305	APER 536	PPER 328	x 102	y 71
TRANSOM - 100MM			TYPE S	ALLOY 6063	TEMPER T5	Ix Iy	184 767 525 143
CURRENT	NIL		40 Kg Pack 2	Len 1 6500	Len 2 0		
995-057	Scale (1 : 4)		MASS 0.803	APER 309	PPER 170	x 58	y 43
JAMB ADAPTOR			TYPE B	ALLOY 6060	TEMPER T5	Ix Iy	45 700 66 194
CURRENT	LOW USE		40 Kg Pack 8	Len 1 6500	Len 2 0	MILL 57	
995-058	Scale (1 : 6)		MASS 1.332	APER 261	PPER 228	x 50	y 66
SASH			TYPE B	ALLOY 6063	TEMPER T5	Ix Iy	135 272 127 636
CURRENT	NIL		40 Kg Pack 4	Len 1 6500	Len 2 0		
995-059	Scale (1 : 3)		MASS 0.978	APER 357	PPER 178	x 42	y 50
50MM MIDRAIL			TYPE S	ALLOY 6063	TEMPER T5	Ix Iy	85 134 93 386
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0		

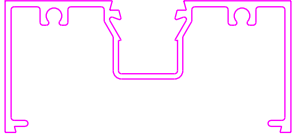


995 Series Sections

SECTION PROPERTIES

995-060	Scale (1 : 2)		MASS 0.275	APER 150	PPER 100	x 21	y 37		
048/017 ADAPTOR			TYPE S	ALLOY 6063	TEMPER T5	Ix 7 894	Iy 4 790		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-061	Scale (1 : 6)		MASS 1.306	APER 536	PPER 329	x 102	y 70		
SILL			TYPE S	ALLOY 6063	TEMPER T5	Ix 183 720	Iy 529 746		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-062	Scale (1 : 6)		MASS 1.864	APER 465	PPER 349	x 102	y 75		
TRANSOME			TYPE B	ALLOY 6063	TEMPER T6	Ix 280 919	Iy 497 366		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-069	Scale (1 : 6)		MASS 2.649	APER 577	PPER 289	x 114	y 68		
H.D. TOP TRACK			TYPE S	ALLOY 6063	TEMPER T6	Ix 432 007	Iy 1 382 142		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-070	Scale (1 : 4)		MASS 0.914	APER 326	PPER 163	x 110	y 11		
H.D. TOP TRACK PELMET			TYPE S	ALLOY 6063	TEMPER T6	Ix 2 382	Iy 423 300		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-101	Scale (1 : 3)		MASS 1.294	APER 534	PPER 267	x 102	y 44		
LIGHTWEIGHT MAIN FRAME			TYPE S	ALLOY 6063	TEMPER T6	Ix 94 019	Iy 638 158		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-103	Scale (1 : 2)		MASS 0.657	APER 315	PPER 158	x 91	y 21		
LIGHTWEIGHT POCKET FILLER			TYPE S	ALLOY 6063	TEMPER T6	Ix 11 402	Iy 148 146		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-201	Scale (1 : 3)		MASS 1.705	APER 608	PPER 304	x 102	y 50		
D.G. JAMB / MULLION			TYPE S	ALLOY 6063	TEMPER T6	Ix 141 322	Iy 863 890		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-202	Scale (1 : 2)		MASS 0.867	APER 337	PPER 169	x 91	y 21		
D.G. GLAZING ADAPTOR			TYPE S	ALLOY 6063	TEMPER T6	Ix 19 798	Iy 224 891		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-204	Scale (1 : 1)		MASS 0.267	APER 104	PPER 100	x 38	y 9		
D.G. POCKET FILLER			TYPE S	ALLOY 6063	TEMPER T6	Ix 381	Iy 14 660		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-205	Scale (1 : 3)		MASS 1.388	APER 506	PPER 253	x 102	y 50		
D.G. SILL / TRANSOM			TYPE S	ALLOY 6060	TEMPER T5	Ix 112 007	Iy 683 667		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
995-206	Scale (1 : 2)		MASS 0.420	APER 199	PPER 100	x 34	y 29		
D.G. GLAZING BEAD			TYPE S	ALLOY 6063	TEMPER T6	Ix 12 385	Iy 22 614		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			









995 Series Sections

SECTION PROPERTIES

995-401 Scale (1 : 2) HEAD / JAMB / MULLION CURRENT NL		<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 76</td> <td>y 35</td> </tr> <tr> <td>0.938</td> <td>421</td> <td>211</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>39 822</td> </tr> <tr> <td>S</td> <td>6063</td> <td>T6</td> <td>Iy</td> <td>259 341</td> </tr> </table>	MASS	APER	PPER	x 76	y 35	0.938	421	211			TYPE	ALLOY	TEMPER	Ix	39 822	S	6063	T6	Iy	259 341																
MASS	APER	PPER	x 76	y 35																																		
0.938	421	211																																				
TYPE	ALLOY	TEMPER	Ix	39 822																																		
S	6063	T6	Iy	259 341																																		
<table border="1"> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>		40 Kg Pack	0	Len 1	Len 2							0	0					<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 127</td> <td>y 7</td> </tr> <tr> <td>0.914</td> <td>307</td> <td>154</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>664</td> </tr> <tr> <td>S</td> <td>6063</td> <td>T6</td> <td>Iy</td> <td>471 726</td> </tr> </table>	MASS	APER	PPER	x 127	y 7	0.914	307	154			TYPE	ALLOY	TEMPER	Ix	664	S	6063	T6	Iy	471 726
40 Kg Pack	0	Len 1	Len 2																																			
		0	0																																			
MASS	APER	PPER	x 127	y 7																																		
0.914	307	154																																				
TYPE	ALLOY	TEMPER	Ix	664																																		
S	6063	T6	Iy	471 726																																		
995-601 Scale (1 : 3) FLUSH FILLER CURRENT NL		<table border="1"> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	40 Kg Pack	0	Len 1	Len 2							0	0																								
40 Kg Pack	0	Len 1	Len 2																																			
		0	0																																			
995-607 Scale (1 : 4) OPEN BACK BOX W/SCREW FLUTES CURRENT NL		<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 152</td> <td>y 44</td> </tr> <tr> <td>2.280</td> <td>558</td> <td>279</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>177 617</td> </tr> <tr> <td>S</td> <td>6063</td> <td>T6</td> <td>Iy</td> <td>2 704 628</td> </tr> </table>	MASS	APER	PPER	x 152	y 44	2.280	558	279			TYPE	ALLOY	TEMPER	Ix	177 617	S	6063	T6	Iy	2 704 628																
MASS	APER	PPER	x 152	y 44																																		
2.280	558	279																																				
TYPE	ALLOY	TEMPER	Ix	177 617																																		
S	6063	T6	Iy	2 704 628																																		
<table border="1"> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>		40 Kg Pack	0	Len 1	Len 2							0	0																									
40 Kg Pack	0	Len 1	Len 2																																			
		0	0																																			

997 Series Sections













SECTION PROPERTIES

997-001	Scale (1 : 3)		MASS 1.362	APER 460	PPER 232	x 114	y 44
SINGLE FIN HEAD/TRANSOME			TYPE S	ALLOY 6063	TEMPER T6	Ix 109 457	Iy 888 753
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
997-002	Scale (1 : 3)		MASS 1.383	APER 490	PPER 245	x 115	y 44
MULLION			TYPE S	ALLOY 6063	TEMPER T6	Ix 111 655	Iy 915 459
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
997-003	Scale (1 : 1)		MASS 0.356	APER 178	PPER 100	x 44	y 17
GLAZING ADAPTOR			TYPE S	ALLOY 6063	TEMPER T6	Ix 2 283	Iy 18 732
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
997-004	Scale (1 : 2)		MASS 0.412	APER 202	PPER 101	x 44	y 19
GLAZING ADAPTOR			TYPE S	ALLOY 6063	TEMPER T6	Ix 4 016	Iy 27 434
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
997-005	Scale (1 : 3)		MASS 1.135	APER 428	PPER 214	x 114	y 44
MULLION			TYPE S	ALLOY 6063	TEMPER T6	Ix 60 916	Iy 625 346
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
997-006	Scale (1 : 3)		MASS 1.012	APER 377	PPER 189	x 101	y 44
MULLION			TYPE S	ALLOY 6063	TEMPER T6	Ix 53 378	Iy 535 651
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
997-008	Scale (1 : 3)		MASS 1.051	APER 392	PPER 196	x 116	y 48
MULLION			TYPE S	ALLOY 6063	TEMPER T5	Ix 68 161	Iy 614 987
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
997-009	Scale (1 : 1)		MASS 0.177	APER 76	PPER 100	x 13	y 14
GLAZING ADAPTOR			TYPE S	ALLOY 6063	TEMPER T6	Ix 1 898	Iy 962
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		

ICT SECTIONS

SECTION PROPERTIES













ICT Page 1 14-Oct-18

ICT-003 Scale (1 : 7) ITB-909 90 X 90 X 8/6 TEE SEC CURRENT NIL	 <table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x</td> <td>y</td> </tr> <tr> <td>4.644</td> <td>330</td> <td>330</td> <td>90</td> <td>90</td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td></td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>1 107 127</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>Iy</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>507 579</td> <td></td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>6500</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x	y	4.644	330	330	90	90	TYPE	ALLOY	TEMPER	Ix		S	6082	T6	1 107 127					Iy					507 579		40 Kg Pack	0	Len 1	Len 2				6500	0	
MASS	APER	PPER	x	y																																					
4.644	330	330	90	90																																					
TYPE	ALLOY	TEMPER	Ix																																						
S	6082	T6	1 107 127																																						
			Iy																																						
			507 579																																						
40 Kg Pack	0	Len 1	Len 2																																						
		6500	0																																						
ICT-004 Scale (1 : 5) ITB-604 60 X 40 X 3.5 TEE SEC CURRENT NIL	 <table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x</td> <td>y</td> </tr> <tr> <td>1.253</td> <td>184</td> <td>184</td> <td>40</td> <td>60</td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td></td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>140 263</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>Iy</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>22 647</td> <td></td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x	y	1.253	184	184	40	60	TYPE	ALLOY	TEMPER	Ix		S	6082	T6	140 263					Iy					22 647		40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x	y																																					
1.253	184	184	40	60																																					
TYPE	ALLOY	TEMPER	Ix																																						
S	6082	T6	140 263																																						
			Iy																																						
			22 647																																						
40 Kg Pack	0	Len 1	Len 2																																						
		0	0																																						
ICT-005 Scale (1 : 6) ITB-704 70 X 40 X 4 TEE CURRENT NIL	 <table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x</td> <td>y</td> </tr> <tr> <td>1.428</td> <td>204</td> <td>204</td> <td>40</td> <td>70</td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td></td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>239 011</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>Iy</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>22 899</td> <td></td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x	y	1.428	204	204	40	70	TYPE	ALLOY	TEMPER	Ix		S	6082	T6	239 011					Iy					22 899		40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x	y																																					
1.428	204	204	40	70																																					
TYPE	ALLOY	TEMPER	Ix																																						
S	6082	T6	239 011																																						
			Iy																																						
			22 899																																						
40 Kg Pack	0	Len 1	Len 2																																						
		0	0																																						
ICT-006 Scale (1 : 11) ITB-140 140 X 50 X 7.5 TEE CURRENT NIL	 <table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x</td> <td>y</td> </tr> <tr> <td>3.831</td> <td>361</td> <td>361</td> <td>50</td> <td>140</td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td></td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>2 842 663</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>Iy</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>63 386</td> <td></td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x	y	3.831	361	361	50	140	TYPE	ALLOY	TEMPER	Ix		S	6082	T6	2 842 663					Iy					63 386		40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x	y																																					
3.831	361	361	50	140																																					
TYPE	ALLOY	TEMPER	Ix																																						
S	6082	T6	2 842 663																																						
			Iy																																						
			63 386																																						
40 Kg Pack	0	Len 1	Len 2																																						
		0	0																																						
ICT-007 Scale (1 : 10) ITB-120 120 X 50 X 6.5 TEE CURRENT NIL	 <table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x</td> <td>y</td> </tr> <tr> <td>3.017</td> <td>320</td> <td>320</td> <td>50</td> <td>120</td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td></td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>1 639 565</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>Iy</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>50 523</td> <td></td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x	y	3.017	320	320	50	120	TYPE	ALLOY	TEMPER	Ix		S	6082	T6	1 639 565					Iy					50 523		40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x	y																																					
3.017	320	320	50	120																																					
TYPE	ALLOY	TEMPER	Ix																																						
S	6082	T6	1 639 565																																						
			Iy																																						
			50 523																																						
40 Kg Pack	0	Len 1	Len 2																																						
		0	0																																						
ICT-008 Scale (1 : 2) END STRIP CURRENT NIL	 <table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x</td> <td>y</td> </tr> <tr> <td>0.168</td> <td>67</td> <td>100</td> <td>9</td> <td>20</td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td></td> </tr> <tr> <td>S</td> <td>6060SF</td> <td>T1</td> <td>3 037</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>Iy</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>384</td> <td></td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x	y	0.168	67	100	9	20	TYPE	ALLOY	TEMPER	Ix		S	6060SF	T1	3 037					Iy					384		40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x	y																																					
0.168	67	100	9	20																																					
TYPE	ALLOY	TEMPER	Ix																																						
S	6060SF	T1	3 037																																						
			Iy																																						
			384																																						
40 Kg Pack	0	Len 1	Len 2																																						
		0	0																																						
ICT-009 Scale (1 : 4) FLAT BAR CURRENT NIL	 <table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x</td> <td>y</td> </tr> <tr> <td>1.990</td> <td>255</td> <td>255</td> <td>125</td> <td>6</td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td></td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>2 178</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>Iy</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>917 736</td> <td></td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x	y	1.990	255	255	125	6	TYPE	ALLOY	TEMPER	Ix		S	6082	T6	2 178					Iy					917 736		40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x	y																																					
1.990	255	255	125	6																																					
TYPE	ALLOY	TEMPER	Ix																																						
S	6082	T6	2 178																																						
			Iy																																						
			917 736																																						
40 Kg Pack	0	Len 1	Len 2																																						
		0	0																																						
ICT-010 Scale (1 : 4) FLAT BAR CURRENT NIL	 <table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x</td> <td>y</td> </tr> <tr> <td>2.664</td> <td>260</td> <td>260</td> <td>124</td> <td>8</td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td></td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>5 204</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>Iy</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>1 237 589</td> <td></td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x	y	2.664	260	260	124	8	TYPE	ALLOY	TEMPER	Ix		S	6082	T6	5 204					Iy					1 237 589		40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x	y																																					
2.664	260	260	124	8																																					
TYPE	ALLOY	TEMPER	Ix																																						
S	6082	T6	5 204																																						
			Iy																																						
			1 237 589																																						
40 Kg Pack	0	Len 1	Len 2																																						
		0	0																																						
ICT-011 Scale (1 : 3) TRACK CURRENT NIL	 <table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x</td> <td>y</td> </tr> <tr> <td>0.677</td> <td>114</td> <td>100</td> <td>20</td> <td>27</td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td></td> </tr> <tr> <td>B</td> <td>6082</td> <td>T5</td> <td>22 732</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>Iy</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>6 524</td> <td></td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x	y	0.677	114	100	20	27	TYPE	ALLOY	TEMPER	Ix		B	6082	T5	22 732					Iy					6 524		40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x	y																																					
0.677	114	100	20	27																																					
TYPE	ALLOY	TEMPER	Ix																																						
B	6082	T5	22 732																																						
			Iy																																						
			6 524																																						
40 Kg Pack	0	Len 1	Len 2																																						
		0	0																																						
ICT-012 Scale (1 : 14) TEE 180 180 X 70 X 10/6 TEE CURRENT NIL	 <table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x</td> <td>y</td> </tr> <tr> <td>5.872</td> <td>497</td> <td>497</td> <td>70</td> <td>180</td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td></td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>7 164 005</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>Iy</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>186 242</td> <td></td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x	y	5.872	497	497	70	180	TYPE	ALLOY	TEMPER	Ix		S	6082	T6	7 164 005					Iy					186 242		40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x	y																																					
5.872	497	497	70	180																																					
TYPE	ALLOY	TEMPER	Ix																																						
S	6082	T6	7 164 005																																						
			Iy																																						
			186 242																																						
40 Kg Pack	0	Len 1	Len 2																																						
		0	0																																						
ICT-013 Scale (1 : 6) TEE 70 70 X 50 X 4/8 TEE CURRENT NIL	 <table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x</td> <td>y</td> </tr> <tr> <td>1.775</td> <td>237</td> <td>118</td> <td>50</td> <td>70</td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td></td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>269 602</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>Iy</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>83 725</td> <td></td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x	y	1.775	237	118	50	70	TYPE	ALLOY	TEMPER	Ix		S	6082	T6	269 602					Iy					83 725		40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x	y																																					
1.775	237	118	50	70																																					
TYPE	ALLOY	TEMPER	Ix																																						
S	6082	T6	269 602																																						
			Iy																																						
			83 725																																						
40 Kg Pack	0	Len 1	Len 2																																						
		0	0																																						
ICT-014 Scale (1 : 7) ITB 80 80 X 40 X 4.5 TEE CURRENT NIL	 <table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x</td> <td>y</td> </tr> <tr> <td>1.630</td> <td>224</td> <td>224</td> <td>40</td> <td>80</td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td></td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>376 589</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>Iy</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>23 222</td> <td></td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x	y	1.630	224	224	40	80	TYPE	ALLOY	TEMPER	Ix		S	6082	T6	376 589					Iy					23 222		40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x	y																																					
1.630	224	224	40	80																																					
TYPE	ALLOY	TEMPER	Ix																																						
S	6082	T6	376 589																																						
			Iy																																						
			23 222																																						
40 Kg Pack	0	Len 1	Len 2																																						
		0	0																																						

ICT SECTIONS

SECTION PROPERTIES



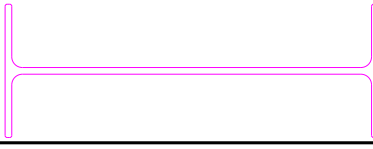


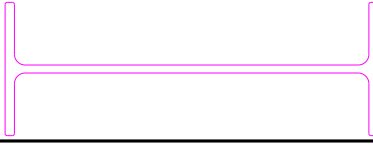
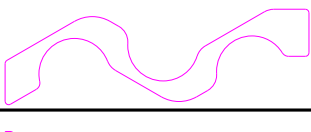

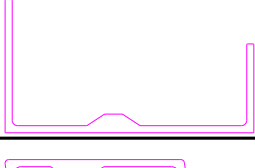

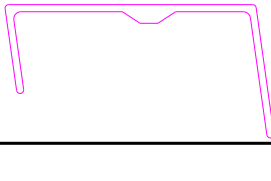

ICT Page 2 14-Oct-18

<p>ICT-015 Scale (1 : 8) TEE 100 100 X 45 X 4/8 TEE</p>  <p>CURRENT NIL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 45</td> <td>y 100</td> </tr> <tr> <td>1.991</td> <td>287</td> <td>287</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>719 258</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>61 302</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 45	y 100	1.991	287	287			TYPE	ALLOY	TEMPER	Ix	719 258	S	6082	T6	Iy	61 302	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 45	y 100																											
1.991	287	287																													
TYPE	ALLOY	TEMPER	Ix	719 258																											
S	6082	T6	Iy	61 302																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-016 Scale (1 : 8) ITB 100 100 X 50 X 5.5 TEE</p>  <p>CURRENT NIL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 50</td> <td>y 100</td> </tr> <tr> <td>2.427</td> <td>280</td> <td>280</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>885 944</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>48 825</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>6500</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 50	y 100	2.427	280	280			TYPE	ALLOY	TEMPER	Ix	885 944	S	6082	T6	Iy	48 825	40 Kg Pack	0	Len 1	Len 2				6500	0	
MASS	APER	PPER	x 50	y 100																											
2.427	280	280																													
TYPE	ALLOY	TEMPER	Ix	885 944																											
S	6082	T6	Iy	48 825																											
40 Kg Pack	0	Len 1	Len 2																												
		6500	0																												
<p>ICT-017 Scale (1 : 11) TEE 140 140 X 70 X 6/10 TEE</p>  <p>CURRENT NIL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 70</td> <td>y 140</td> </tr> <tr> <td>4.026</td> <td>414</td> <td>414</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>2 913 305</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>287 240</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 70	y 140	4.026	414	414			TYPE	ALLOY	TEMPER	Ix	2 913 305	S	6082	T6	Iy	287 240	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 70	y 140																											
4.026	414	414																													
TYPE	ALLOY	TEMPER	Ix	2 913 305																											
S	6082	T6	Iy	287 240																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-019 Scale (1 : 8) TBR-100 70 X 100 TEE SECTION</p>  <p>CURRENT NIL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 70</td> <td>y 100</td> </tr> <tr> <td>2.888</td> <td>334</td> <td>334</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>841 148</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>285 335</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 70	y 100	2.888	334	334			TYPE	ALLOY	TEMPER	Ix	841 148	S	6082	T6	Iy	285 335	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 70	y 100																											
2.888	334	334																													
TYPE	ALLOY	TEMPER	Ix	841 148																											
S	6082	T6	Iy	285 335																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-020 Scale (1 : 3) TBR-505 50 x 50 x 4 TEE</p>  <p>CURRENT NIL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 0</td> <td>y 0</td> </tr> <tr> <td>1.058</td> <td>195</td> <td>195</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>92 998</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>41 840</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 0	y 0	1.058	195	195			TYPE	ALLOY	TEMPER	Ix	92 998	S	6082	T6	Iy	41 840	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 0	y 0																											
1.058	195	195																													
TYPE	ALLOY	TEMPER	Ix	92 998																											
S	6082	T6	Iy	41 840																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-021 Scale (1 : 7) MARINE LOUVRE BLADE</p>  <p>CURRENT STOCKED</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 36</td> <td>y 84</td> </tr> <tr> <td>0.441</td> <td>272</td> <td>272</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>76 197</td> </tr> <tr> <td>S</td> <td>6060</td> <td>T5</td> <td>Iy</td> <td>21 491</td> </tr> <tr> <td>40 Kg Pack</td> <td>14</td> <td>Len 1</td> <td>Len 2</td> <td>MILL</td> </tr> <tr> <td></td> <td></td> <td>5800</td> <td>0</td> <td>98</td> </tr> </table>	MASS	APER	PPER	x 36	y 84	0.441	272	272			TYPE	ALLOY	TEMPER	Ix	76 197	S	6060	T5	Iy	21 491	40 Kg Pack	14	Len 1	Len 2	MILL			5800	0	98
MASS	APER	PPER	x 36	y 84																											
0.441	272	272																													
TYPE	ALLOY	TEMPER	Ix	76 197																											
S	6060	T5	Iy	21 491																											
40 Kg Pack	14	Len 1	Len 2	MILL																											
		5800	0	98																											
<p>ICT-022 Scale (1 : 4) ANG 100 X 50 X 4</p>  <p>CURRENT NIL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 100</td> <td>y 50</td> </tr> <tr> <td>1.592</td> <td>298</td> <td>298</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>111 832</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>627 016</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 100	y 50	1.592	298	298			TYPE	ALLOY	TEMPER	Ix	111 832	S	6082	T6	Iy	627 016	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 100	y 50																											
1.592	298	298																													
TYPE	ALLOY	TEMPER	Ix	111 832																											
S	6082	T6	Iy	627 016																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-023 Scale (1 : 4) 100 X 50 X 3 CHANNEL</p>  <p>CURRENT NIL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 100</td> <td>y 50</td> </tr> <tr> <td>1.588</td> <td>391</td> <td>391</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>143 368</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>921 839</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 100	y 50	1.588	391	391			TYPE	ALLOY	TEMPER	Ix	143 368	S	6082	T6	Iy	921 839	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 100	y 50																											
1.588	391	391																													
TYPE	ALLOY	TEMPER	Ix	143 368																											
S	6082	T6	Iy	921 839																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-025 Scale (1 : 3) 100 X 25 X 3 CHANNEL</p>  <p>CURRENT NIL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 100</td> <td>y 25</td> </tr> <tr> <td>1.181</td> <td>291</td> <td>291</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>19 884</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>568 889</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 100	y 25	1.181	291	291			TYPE	ALLOY	TEMPER	Ix	19 884	S	6082	T6	Iy	568 889	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 100	y 25																											
1.181	291	291																													
TYPE	ALLOY	TEMPER	Ix	19 884																											
S	6082	T6	Iy	568 889																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-026 Scale (1 : 8) 160 X 100 X 3 RHS</p>  <p>CURRENT NIL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 160</td> <td>y 100</td> </tr> <tr> <td>4.151</td> <td>520</td> <td>520</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>2 690 757</td> </tr> <tr> <td>A</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>5 568 946</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 160	y 100	4.151	520	520			TYPE	ALLOY	TEMPER	Ix	2 690 757	A	6082	T6	Iy	5 568 946	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 160	y 100																											
4.151	520	520																													
TYPE	ALLOY	TEMPER	Ix	2 690 757																											
A	6082	T6	Iy	5 568 946																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-027 Scale (1 : 6) 180 X 50 X 3 RHS</p>  <p>CURRENT NIL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 180</td> <td>y 50</td> </tr> <tr> <td>3.663</td> <td>460</td> <td>460</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>643 349</td> </tr> <tr> <td>A</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>5 041 493</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 180	y 50	3.663	460	460			TYPE	ALLOY	TEMPER	Ix	643 349	A	6082	T6	Iy	5 041 493	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 180	y 50																											
3.663	460	460																													
TYPE	ALLOY	TEMPER	Ix	643 349																											
A	6082	T6	Iy	5 041 493																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-029 Scale (1 : 8) 100 X 100 X 3.2 SQUARE TUBE R/</p>  <p>CURRENT NIL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 100</td> <td>y 100</td> </tr> <tr> <td>3.342</td> <td>393</td> <td>393</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>1 920 446</td> </tr> <tr> <td>A</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>1 920 446</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 100	y 100	3.342	393	393			TYPE	ALLOY	TEMPER	Ix	1 920 446	A	6082	T6	Iy	1 920 446	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 100	y 100																											
3.342	393	393																													
TYPE	ALLOY	TEMPER	Ix	1 920 446																											
A	6082	T6	Iy	1 920 446																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												

ICT SECTIONS

SECTION PROPERTIES





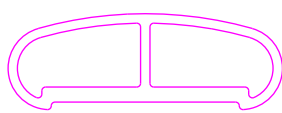


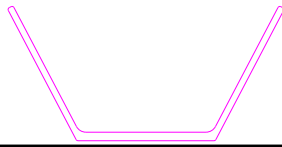




ICT Page 3 14-Oct-18

<p>ICT-030 Scale (1 : 10) 317 X 32.50 FLOORING</p> <p>CURRENT NIL</p> 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 331</td> <td>y 33</td> </tr> <tr> <td>2.474</td> <td>930</td> <td>465</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>96 988</td> </tr> <tr> <td>S</td> <td>NV6082</td> <td>T6</td> <td>Iy</td> <td>9 140 380</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 331	y 33	2.474	930	465			TYPE	ALLOY	TEMPER	Ix	96 988	S	NV6082	T6	Iy	9 140 380	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 331	y 33																											
2.474	930	465																													
TYPE	ALLOY	TEMPER	Ix	96 988																											
S	NV6082	T6	Iy	9 140 380																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-032 Scale (1 : 5) TEE 60 60 X 50 X 6/4 TEE SECT</p> <p>CURRENT NIL</p> 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 50</td> <td>y 60</td> </tr> <tr> <td>1.417</td> <td>217</td> <td>217</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>166 924</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>62 849</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 50	y 60	1.417	217	217			TYPE	ALLOY	TEMPER	Ix	166 924	S	6082	T6	Iy	62 849	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 50	y 60																											
1.417	217	217																													
TYPE	ALLOY	TEMPER	Ix	166 924																											
S	6082	T6	Iy	62 849																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-034 Scale (1 : 8) 'I' BEAM</p> <p>CURRENT NIL</p> 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 280</td> <td>y 100</td> </tr> <tr> <td>6.507</td> <td>931</td> <td>931</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>827 751</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>28 011 572</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>6500</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 280	y 100	6.507	931	931			TYPE	ALLOY	TEMPER	Ix	827 751	S	6082	T6	Iy	28 011 572	40 Kg Pack	0	Len 1	Len 2				6500	0	
MASS	APER	PPER	x 280	y 100																											
6.507	931	931																													
TYPE	ALLOY	TEMPER	Ix	827 751																											
S	6082	T6	Iy	28 011 572																											
40 Kg Pack	0	Len 1	Len 2																												
		6500	0																												
<p>ICT-035 Scale (1 : 11) 145 X 9.5 SQUARE BOX</p> <p>CURRENT NIL</p> 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 145</td> <td>y 145</td> </tr> <tr> <td>14.003</td> <td>577</td> <td>577</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>15 897 979</td> </tr> <tr> <td>A</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>15 897 979</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 145	y 145	14.003	577	577			TYPE	ALLOY	TEMPER	Ix	15 897 979	A	6082	T6	Iy	15 897 979	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 145	y 145																											
14.003	577	577																													
TYPE	ALLOY	TEMPER	Ix	15 897 979																											
A	6082	T6	Iy	15 897 979																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-036 Scale (1 : 4) 40 X 40 X 4.0 ANGLE</p> <p>CURRENT NIL</p> 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 40</td> <td>y 40</td> </tr> <tr> <td>0.833</td> <td>158</td> <td>158</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>46 230</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>46 230</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 40	y 40	0.833	158	158			TYPE	ALLOY	TEMPER	Ix	46 230	S	6082	T6	Iy	46 230	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 40	y 40																											
0.833	158	158																													
TYPE	ALLOY	TEMPER	Ix	46 230																											
S	6082	T6	Iy	46 230																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-040 Scale (1 : 8) 'I' BEAM</p> <p>CURRENT NIL</p> 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 280</td> <td>y 100</td> </tr> <tr> <td>8.258</td> <td>929</td> <td>929</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>1 163 309</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>36 375 387</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 280	y 100	8.258	929	929			TYPE	ALLOY	TEMPER	Ix	1 163 309	S	6082	T6	Iy	36 375 387	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 280	y 100																											
8.258	929	929																													
TYPE	ALLOY	TEMPER	Ix	1 163 309																											
S	6082	T6	Iy	36 375 387																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-041 Scale (1 : 3) MARINE LOUVRE FRAME</p> <p>CURRENT STOCKED</p> 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 86</td> <td>y 27</td> </tr> <tr> <td>1.870</td> <td>245</td> <td>245</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>32 539</td> </tr> <tr> <td>S</td> <td>NV6082</td> <td>T6</td> <td>Iy</td> <td>499 818</td> </tr> <tr> <td>40 Kg Pack</td> <td>8</td> <td>Len 1</td> <td>Len 2</td> <td>MILL</td> </tr> <tr> <td></td> <td></td> <td>2500</td> <td>0</td> <td>107</td> </tr> </table>	MASS	APER	PPER	x 86	y 27	1.870	245	245			TYPE	ALLOY	TEMPER	Ix	32 539	S	NV6082	T6	Iy	499 818	40 Kg Pack	8	Len 1	Len 2	MILL			2500	0	107
MASS	APER	PPER	x 86	y 27																											
1.870	245	245																													
TYPE	ALLOY	TEMPER	Ix	32 539																											
S	NV6082	T6	Iy	499 818																											
40 Kg Pack	8	Len 1	Len 2	MILL																											
		2500	0	107																											
<p>ICT-044 Scale (1 : 6) TIER# 3 HEADER 100X50X4 CHANNE</p> <p>CURRENT NIL</p> 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 100</td> <td>y 75</td> </tr> <tr> <td>2.714</td> <td>442</td> <td>442</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>418 064</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>1 429 481</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 100	y 75	2.714	442	442			TYPE	ALLOY	TEMPER	Ix	418 064	S	6082	T6	Iy	1 429 481	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 100	y 75																											
2.714	442	442																													
TYPE	ALLOY	TEMPER	Ix	418 064																											
S	6082	T6	Iy	1 429 481																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-045 Scale (1 : 6) TIER# 2 HEADER</p> <p>CURRENT NIL</p> 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 140</td> <td>y 75</td> </tr> <tr> <td>3.148</td> <td>522</td> <td>522</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>452 863</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>3 056 082</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 140	y 75	3.148	522	522			TYPE	ALLOY	TEMPER	Ix	452 863	S	6082	T6	Iy	3 056 082	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 140	y 75																											
3.148	522	522																													
TYPE	ALLOY	TEMPER	Ix	452 863																											
S	6082	T6	Iy	3 056 082																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-046 Scale (1 : 6) TIER# 2 SILL</p> <p>CURRENT NIL</p> 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 111</td> <td>y 75</td> </tr> <tr> <td>2.733</td> <td>441</td> <td>441</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>414 854</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>1 537 765</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 111	y 75	2.733	441	441			TYPE	ALLOY	TEMPER	Ix	414 854	S	6082	T6	Iy	1 537 765	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 111	y 75																											
2.733	441	441																													
TYPE	ALLOY	TEMPER	Ix	414 854																											
S	6082	T6	Iy	1 537 765																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-047 Scale (1 : 6) TIER# 2 SILL</p> <p>CURRENT NIL</p> 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 151</td> <td>y 75</td> </tr> <tr> <td>3.170</td> <td>522</td> <td>522</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>449 353</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>3 234 646</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 151	y 75	3.170	522	522			TYPE	ALLOY	TEMPER	Ix	449 353	S	6082	T6	Iy	3 234 646	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 151	y 75																											
3.170	522	522																													
TYPE	ALLOY	TEMPER	Ix	449 353																											
S	6082	T6	Iy	3 234 646																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-048 Scale (1 : 1) DIA 5MM ROD</p> <p>CURRENT NIL</p> 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 0</td> <td>y 0</td> </tr> <tr> <td>0.053</td> <td>16</td> <td>100</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>31</td> </tr> <tr> <td>S</td> <td>6060</td> <td>T5</td> <td>Iy</td> <td>31</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 0	y 0	0.053	16	100			TYPE	ALLOY	TEMPER	Ix	31	S	6060	T5	Iy	31	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 0	y 0																											
0.053	16	100																													
TYPE	ALLOY	TEMPER	Ix	31																											
S	6060	T5	Iy	31																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												

ICT SECTIONS

SECTION PROPERTIES


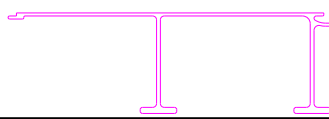



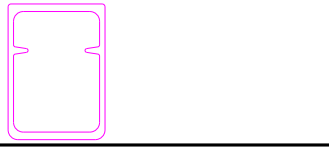
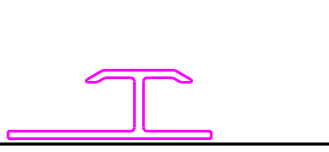
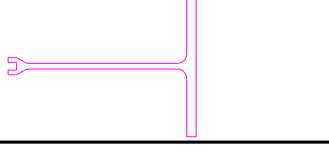
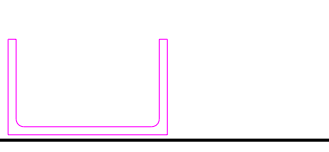
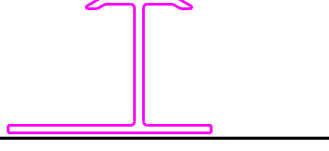

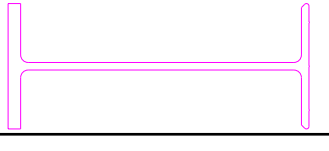
ICT Page 4 14-Oct-18

ICT-054	Scale (1 : 7)		MASS 4.390	APER 558	PPER 558	x 130	y 80		
130X80 'I' BEAM			TYPE S	ALLOY 6082	TEMPER T6	Ix 542 949	Iy 4 677 476		
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0				
ICT-055	Scale (1 : 8)		MASS 5.133	APER 393	PPER 393	x 100	y 100		
100 X 100 X 5.0 SQUARE TUBE R/			TYPE A	ALLOY 6082	TEMPER T6	Ix 2 847 890	Iy 2 847 890		
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0				
ICT-056	Scale (1 : 2)		MASS 0.752	APER 127	PPER 127	x 0	y 0		
HALF STUD			TYPE B	ALLOY 6060	TEMPER T5	Ix 40 725	Iy 35 522		
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0				
ICT-057	Scale (1 : 2)		MASS 0.769	APER 162	PPER 162	x 0	y 0		
STUD			TYPE B	ALLOY 6063	TEMPER T5	Ix 42 592	Iy 101 636		
CURRENT	NIL		40 Kg Pack 0	Len 1 6500	Len 2 0				
ICT-058	Scale (1 : 2)		MASS 1.479	APER 174	PPER 123	x 0	y 0		
RAIL			TYPE C	ALLOY 6063	TEMPER T5	Ix 39 473	Iy 239 642		
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0				
ICT-059	Scale (1 : 3)		MASS 1.490	APER 273	PPER 136	x 62	y 33		
SEAT TRACK			TYPE S	ALLOY 6082	TEMPER T6	Ix 72 816	Iy 163 066		
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0				
ICT-062	Scale (1 : 2)		MASS 0.151	APER 76	PPER 100	x 0	y 0		
EXTERNAL CORNER			TYPE S	ALLOY 6063	TEMPER T5	Ix 1 919	Iy 1 919		
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0				
ICT-066	Scale (1 : 5)		MASS 1.810	APER 404	PPER 404	x 129	y 63		
TOP HAT			TYPE S	ALLOY 6082	TEMPER T6	Ix 270 601	Iy 1 058 940		
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0				
ICT-068	Scale (1 : 10)		MASS 8.023	APER 486	PPER 243	x 127	y 127		
127 X 6.35 SQUARE BOX			TYPE B	ALLOY 6063	TEMPER T6	Ix 7 052 575	Iy 7 052 575		
CURRENT	STOCKED		40 Kg Pack 1	Len 1 4500	Len 2 0	MILL 10			
ICT-069	Scale (1 : 2)		MASS 0.744	APER 186	PPER 100	x 0	y 0		
DOOR JAMB ANGLE			TYPE S	ALLOY 6060	TEMPER T5	Ix 10 089	Iy 84 123		
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0				
ICT-070	Scale (1 : 3)		MASS 1.150	APER 302	PPER 154	x 0	y 0		
DOOR JAMB			TYPE S	ALLOY 6060	TEMPER T5	Ix 5 611	Iy 674 792		
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0				
ICT-071	Scale (1 : 2)		MASS 0.404	APER 152	PPER 100	x 0	y 0		
DOOR CHANNEL			TYPE S	ALLOY 6060	TEMPER T5	Ix 5 387	Iy 35 505		
CURRENT	NIL		40 Kg Pack 0	Len 1 0	Len 2 0				

ICT SECTIONS

SECTION PROPERTIES













ICT Page 5 14-Oct-18

ICT-074 Scale (1 : 5) 150 X 60 X 5.0 CHANNEL CURRENT NIL		<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 150</td> <td>y 60</td> </tr> <tr> <td>3.552</td> <td>525</td> <td>525</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>426 380</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>4 348 148</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 150	y 60	3.552	525	525			TYPE	ALLOY	TEMPER	Ix	426 380	S	6082	T6	Iy	4 348 148	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 150	y 60																												
3.552	525	525																														
TYPE	ALLOY	TEMPER	Ix	426 380																												
S	6082	T6	Iy	4 348 148																												
40 Kg Pack	0	Len 1	Len 2																													
		0	0																													
ICT-077 Scale (1 : 7) FLOOR PLANK CURRENT NIL		<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 226</td> <td>y 66</td> </tr> <tr> <td>2.676</td> <td>801</td> <td>400</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>663 801</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>3 804 257</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 226	y 66	2.676	801	400			TYPE	ALLOY	TEMPER	Ix	663 801	S	6082	T6	Iy	3 804 257	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 226	y 66																												
2.676	801	400																														
TYPE	ALLOY	TEMPER	Ix	663 801																												
S	6082	T6	Iy	3 804 257																												
40 Kg Pack	0	Len 1	Len 2																													
		0	0																													
ICT-081 Scale (1 : 1) 40 X 9 X 2 CHANNEL CURRENT NIL		<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 0</td> <td>y 0</td> </tr> <tr> <td>0.278</td> <td>108</td> <td>100</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>481</td> </tr> <tr> <td>S</td> <td>6060</td> <td>T5</td> <td>Iy</td> <td>18 683</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 0	y 0	0.278	108	100			TYPE	ALLOY	TEMPER	Ix	481	S	6060	T5	Iy	18 683	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 0	y 0																												
0.278	108	100																														
TYPE	ALLOY	TEMPER	Ix	481																												
S	6060	T5	Iy	18 683																												
40 Kg Pack	0	Len 1	Len 2																													
		0	0																													
ICT-083 Scale (1 : 12) 150 X 150 X 10 ANGLE CURRENT NIL		<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 150</td> <td>y 150</td> </tr> <tr> <td>7.874</td> <td>598</td> <td>598</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>6 377 296</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>6 377 296</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 150	y 150	7.874	598	598			TYPE	ALLOY	TEMPER	Ix	6 377 296	S	6082	T6	Iy	6 377 296	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 150	y 150																												
7.874	598	598																														
TYPE	ALLOY	TEMPER	Ix	6 377 296																												
S	6082	T6	Iy	6 377 296																												
40 Kg Pack	0	Len 1	Len 2																													
		0	0																													
ICT-084 Scale (1 : 7) 202.1 X 90.6 "I" BEAM CURRENT NIL		<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 202</td> <td>y 91</td> </tr> <tr> <td>7.648</td> <td>742</td> <td>742</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>1 263 411</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>19 862 933</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 202	y 91	7.648	742	742			TYPE	ALLOY	TEMPER	Ix	1 263 411	S	6082	T6	Iy	19 862 933	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 202	y 91																												
7.648	742	742																														
TYPE	ALLOY	TEMPER	Ix	1 263 411																												
S	6082	T6	Iy	19 862 933																												
40 Kg Pack	0	Len 1	Len 2																													
		0	0																													
ICT-088 Scale (1 : 11) WINDOW POST SECTION CURRENT NIL		<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 100</td> <td>y 140</td> </tr> <tr> <td>8.574</td> <td>469</td> <td>469</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>8 784 441</td> </tr> <tr> <td>B</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>4 705 057</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>6500</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 100	y 140	8.574	469	469			TYPE	ALLOY	TEMPER	Ix	8 784 441	B	6082	T6	Iy	4 705 057	40 Kg Pack	0	Len 1	Len 2				6500	0	
MASS	APER	PPER	x 100	y 140																												
8.574	469	469																														
TYPE	ALLOY	TEMPER	Ix	8 784 441																												
B	6082	T6	Iy	4 705 057																												
40 Kg Pack	0	Len 1	Len 2																													
		6500	0																													
ICT-094 Scale (1 : 1) JOINTER CURRENT NIL		<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 0</td> <td>y 0</td> </tr> <tr> <td>0.133</td> <td>96</td> <td>100</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>625</td> </tr> <tr> <td>S</td> <td>6060</td> <td>T5</td> <td>Iy</td> <td>2 028</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 0	y 0	0.133	96	100			TYPE	ALLOY	TEMPER	Ix	625	S	6060	T5	Iy	2 028	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 0	y 0																												
0.133	96	100																														
TYPE	ALLOY	TEMPER	Ix	625																												
S	6060	T5	Iy	2 028																												
40 Kg Pack	0	Len 1	Len 2																													
		0	0																													
ICT-095 Scale (1 : 8) TEE SECTION CURRENT NIL		<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 200</td> <td>y 150</td> </tr> <tr> <td>7.549</td> <td>724</td> <td>362</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>2 823 055</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>11 990 149</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 200	y 150	7.549	724	362			TYPE	ALLOY	TEMPER	Ix	2 823 055	S	6082	T6	Iy	11 990 149	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 200	y 150																												
7.549	724	362																														
TYPE	ALLOY	TEMPER	Ix	2 823 055																												
S	6082	T6	Iy	11 990 149																												
40 Kg Pack	0	Len 1	Len 2																													
		0	0																													
ICT-096 Scale (1 : 3) 63.50 X 38.10 X 3.20 CHANNEL CURRENT NIL		<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 64</td> <td>y 38</td> </tr> <tr> <td>1.166</td> <td>270</td> <td>135</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>61 687</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>274 513</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 64	y 38	1.166	270	135			TYPE	ALLOY	TEMPER	Ix	61 687	S	6082	T6	Iy	274 513	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 64	y 38																												
1.166	270	135																														
TYPE	ALLOY	TEMPER	Ix	61 687																												
S	6082	T6	Iy	274 513																												
40 Kg Pack	0	Len 1	Len 2																													
		0	0																													
ICT-098 Scale (1 : 1) JOINTER CURRENT NIL		<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 0</td> <td>y 0</td> </tr> <tr> <td>0.163</td> <td>114</td> <td>100</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>3 131</td> </tr> <tr> <td>S</td> <td>6060</td> <td>T5</td> <td>Iy</td> <td>2 069</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 0	y 0	0.163	114	100			TYPE	ALLOY	TEMPER	Ix	3 131	S	6060	T5	Iy	2 069	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 0	y 0																												
0.163	114	100																														
TYPE	ALLOY	TEMPER	Ix	3 131																												
S	6060	T5	Iy	2 069																												
40 Kg Pack	0	Len 1	Len 2																													
		0	0																													
ICT-101 Scale (1 : 6) CHANNEL CURRENT NIL		<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 240</td> <td>y 100</td> </tr> <tr> <td>8.005</td> <td>861</td> <td>431</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>2 928 547</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>26 571 127</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 240	y 100	8.005	861	431			TYPE	ALLOY	TEMPER	Ix	2 928 547	S	6082	T6	Iy	26 571 127	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 240	y 100																												
8.005	861	431																														
TYPE	ALLOY	TEMPER	Ix	2 928 547																												
S	6082	T6	Iy	26 571 127																												
40 Kg Pack	0	Len 1	Len 2																													
		0	0																													
ICT-102 Scale (1 : 6) 'I' BEAM CURRENT NIL		<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 240</td> <td>y 100</td> </tr> <tr> <td>8.031</td> <td>853</td> <td>427</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>1 309 588</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>26 663 170</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 240	y 100	8.031	853	427			TYPE	ALLOY	TEMPER	Ix	1 309 588	S	6082	T6	Iy	26 663 170	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 240	y 100																												
8.031	853	427																														
TYPE	ALLOY	TEMPER	Ix	1 309 588																												
S	6082	T6	Iy	26 663 170																												
40 Kg Pack	0	Len 1	Len 2																													
		0	0																													

ICT SECTIONS

SECTION PROPERTIES













ICT Page 6 14-Oct-18

<p>ICT-103 Scale (1 : 10) TUNNEL SECTION</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 4.667</td> <td>APER 687</td> <td>PPER 343</td> <td>x 320</td> <td>y 50</td> </tr> <tr> <td>TYPE B</td> <td>ALLOY 6082</td> <td>TEMPER T6</td> <td>Ix 330 663</td> <td>Iy 11 377 137</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 4.667	APER 687	PPER 343	x 320	y 50	TYPE B	ALLOY 6082	TEMPER T6	Ix 330 663	Iy 11 377 137	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 4.667	APER 687	PPER 343	x 320	y 50												
TYPE B	ALLOY 6082	TEMPER T6	Ix 330 663	Iy 11 377 137												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>ICT-107 Scale (1 : 10) CURVED TUNNEL</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 7.137</td> <td>APER 724</td> <td>PPER 362</td> <td>x 320</td> <td>y 70</td> </tr> <tr> <td>TYPE B</td> <td>ALLOY 6082</td> <td>TEMPER T6</td> <td>Ix 1 352 336</td> <td>Iy 17 447 269</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 6500</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 7.137	APER 724	PPER 362	x 320	y 70	TYPE B	ALLOY 6082	TEMPER T6	Ix 1 352 336	Iy 17 447 269	40 Kg Pack 0	Len 1 6500	Len 2 0		
MASS 7.137	APER 724	PPER 362	x 320	y 70												
TYPE B	ALLOY 6082	TEMPER T6	Ix 1 352 336	Iy 17 447 269												
40 Kg Pack 0	Len 1 6500	Len 2 0														
<p>ICT-109 Scale (1 : 4) HOLLOW SECTION</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 1.053</td> <td>APER 184</td> <td>PPER 100</td> <td>x 40</td> <td>y 61</td> </tr> <tr> <td>TYPE B</td> <td>ALLOY 6082</td> <td>TEMPER T6</td> <td>Ix 184 746</td> <td>Iy 94 425</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 1.053	APER 184	PPER 100	x 40	y 61	TYPE B	ALLOY 6082	TEMPER T6	Ix 184 746	Iy 94 425	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 1.053	APER 184	PPER 100	x 40	y 61												
TYPE B	ALLOY 6082	TEMPER T6	Ix 184 746	Iy 94 425												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>ICT-110 Scale (1 : 10) TUNNEL SECTION</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 6.301</td> <td>APER 723</td> <td>PPER 362</td> <td>x 320</td> <td>y 70</td> </tr> <tr> <td>TYPE B</td> <td>ALLOY NV6082</td> <td>TEMPER T6</td> <td>Ix 1 351 014</td> <td>Iy 14 855 059</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 6500</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 6.301	APER 723	PPER 362	x 320	y 70	TYPE B	ALLOY NV6082	TEMPER T6	Ix 1 351 014	Iy 14 855 059	40 Kg Pack 0	Len 1 6500	Len 2 0		
MASS 6.301	APER 723	PPER 362	x 320	y 70												
TYPE B	ALLOY NV6082	TEMPER T6	Ix 1 351 014	Iy 14 855 059												
40 Kg Pack 0	Len 1 6500	Len 2 0														
<p>ICT-112 Scale (1 : 1) WALL BOARD FRAMING</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 0.111</td> <td>APER 60</td> <td>PPER 100</td> <td>x 0</td> <td>y 0</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6060</td> <td>TEMPER T5</td> <td>Ix 523</td> <td>Iy 472</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 6500</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.111	APER 60	PPER 100	x 0	y 0	TYPE S	ALLOY 6060	TEMPER T5	Ix 523	Iy 472	40 Kg Pack 0	Len 1 6500	Len 2 0		
MASS 0.111	APER 60	PPER 100	x 0	y 0												
TYPE S	ALLOY 6060	TEMPER T5	Ix 523	Iy 472												
40 Kg Pack 0	Len 1 6500	Len 2 0														
<p>ICT-113 Scale (1 : 6) OUTBOARD CHANNEL SECTION</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 3.310</td> <td>APER 515</td> <td>PPER 257</td> <td>x 159</td> <td>y 100</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6082</td> <td>TEMPER T6</td> <td>Ix 935 150</td> <td>Iy 3 115 959</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 3.310	APER 515	PPER 257	x 159	y 100	TYPE S	ALLOY 6082	TEMPER T6	Ix 935 150	Iy 3 115 959	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 3.310	APER 515	PPER 257	x 159	y 100												
TYPE S	ALLOY 6082	TEMPER T6	Ix 935 150	Iy 3 115 959												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>ICT-114 Scale (1 : 10) OUTBOARD CHANNEL SECTION</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 4.308</td> <td>APER 534</td> <td>PPER 267</td> <td>x 165</td> <td>y 122</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6082</td> <td>TEMPER T6</td> <td>Ix 2 060 525</td> <td>Iy 3 883 884</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 4.308	APER 534	PPER 267	x 165	y 122	TYPE S	ALLOY 6082	TEMPER T6	Ix 2 060 525	Iy 3 883 884	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 4.308	APER 534	PPER 267	x 165	y 122												
TYPE S	ALLOY 6082	TEMPER T6	Ix 2 060 525	Iy 3 883 884												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>ICT-115 Scale (1 : 2) JOINER</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 0.175</td> <td>APER 110</td> <td>PPER 100</td> <td>x 0</td> <td>y 0</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063</td> <td>TEMPER T5</td> <td>Ix 2 648</td> <td>Iy 1 801</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 6500</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.175	APER 110	PPER 100	x 0	y 0	TYPE S	ALLOY 6063	TEMPER T5	Ix 2 648	Iy 1 801	40 Kg Pack 0	Len 1 6500	Len 2 0		
MASS 0.175	APER 110	PPER 100	x 0	y 0												
TYPE S	ALLOY 6063	TEMPER T5	Ix 2 648	Iy 1 801												
40 Kg Pack 0	Len 1 6500	Len 2 0														
<p>ICT-116 Scale (1 : 3) 47.0 X 3.0 SQUARE BOX</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 1.452</td> <td>APER 188</td> <td>PPER 100</td> <td>x 47</td> <td>y 47</td> </tr> <tr> <td>TYPE A</td> <td>ALLOY 6082</td> <td>TEMPER T6</td> <td>Ix 174 200</td> <td>Iy 174 200</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 1.452	APER 188	PPER 100	x 47	y 47	TYPE A	ALLOY 6082	TEMPER T6	Ix 174 200	Iy 174 200	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 1.452	APER 188	PPER 100	x 47	y 47												
TYPE A	ALLOY 6082	TEMPER T6	Ix 174 200	Iy 174 200												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>ICT-117 Scale (1 : 3) 125 X 50 X 6 ANGLE</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 2.757</td> <td>APER 348</td> <td>PPER 174</td> <td>x 125</td> <td>y 50</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6082</td> <td>TEMPER T6</td> <td>Ix 166 909</td> <td>Iy 1 674 155</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 2.757	APER 348	PPER 174	x 125	y 50	TYPE S	ALLOY 6082	TEMPER T6	Ix 166 909	Iy 1 674 155	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 2.757	APER 348	PPER 174	x 125	y 50												
TYPE S	ALLOY 6082	TEMPER T6	Ix 166 909	Iy 1 674 155												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>ICT-119 Scale (1 : 4) 50 X 50 X 3 CHANNEL</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 1.181</td> <td>APER 291</td> <td>PPER 291</td> <td>x 50</td> <td>y 50</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6082</td> <td>TEMPER T6</td> <td>Ix 113 990</td> <td>Iy 188 955</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 0</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 1.181	APER 291	PPER 291	x 50	y 50	TYPE S	ALLOY 6082	TEMPER T6	Ix 113 990	Iy 188 955	40 Kg Pack 0	Len 1 0	Len 2 0		
MASS 1.181	APER 291	PPER 291	x 50	y 50												
TYPE S	ALLOY 6082	TEMPER T6	Ix 113 990	Iy 188 955												
40 Kg Pack 0	Len 1 0	Len 2 0														
<p>ICT-122 Scale (1 : 1) CHANNEL</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS 0.297</td> <td>APER 106</td> <td>PPER 100</td> <td>x 0</td> <td>y 0</td> </tr> <tr> <td>TYPE S</td> <td>ALLOY 6063.3</td> <td>TEMPER T5</td> <td>Ix 824</td> <td>Iy 11 499</td> </tr> <tr> <td>40 Kg Pack 0</td> <td>Len 1 6500</td> <td>Len 2 0</td> <td></td> <td></td> </tr> </table>	MASS 0.297	APER 106	PPER 100	x 0	y 0	TYPE S	ALLOY 6063.3	TEMPER T5	Ix 824	Iy 11 499	40 Kg Pack 0	Len 1 6500	Len 2 0		
MASS 0.297	APER 106	PPER 100	x 0	y 0												
TYPE S	ALLOY 6063.3	TEMPER T5	Ix 824	Iy 11 499												
40 Kg Pack 0	Len 1 6500	Len 2 0														

ICT SECTIONS













SECTION PROPERTIES

ICT Page 7 14-Oct-18

ICT-123	Scale (1 : 7)		MASS 4.292	APER 407	PPER 407	x 125	y 80		
125 X 80 X 8 ANGLE			TYPE S	ALLOY 6082	TEMPER T6	Ix 839 609	Iy 2 563 701		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-124	Scale (1 : 8)		MASS 10.764	APER 835	PPER 418	x 240	y 100		
'I' BEAM			TYPE S	ALLOY 6082	TEMPER T6	Ix 1 941 057	Iy 32 489 063		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-126	Scale (1 : 3)		MASS 2.109	APER 237	PPER 237	x 93	y 35		
51.0 RADIUS 1/3 TUBE			TYPE S	ALLOY 6082	TEMPER T6	Ix 62 844	Iy 609 916		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-127	Scale (1 : 5)		MASS 9.107	APER 213	PPER 106	x 60	y 60		
SQUARE SOLID RAD/CNRS			TYPE S	ALLOY 6082	TEMPER T6	Ix 911 940	Iy 911 940		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-128	Scale (1 : 6)		MASS 1.200	APER 299	PPER 299	x 75	y 75		
75 X 75 X 3 ANGLE			TYPE S	ALLOY 6082	TEMPER T6	Ix 248 960	Iy 248 960		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-130	Scale (1 : 7)		MASS 6.899	APER 223	PPER 112	x 50	y 80		
SOLID			TYPE S	ALLOY 6082	TEMPER T6	Ix 895 232	Iy 512 460		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-133	Scale (1 : 4)		MASS 2.324	APER 345	PPER 172	x 80	y 40		
CHANNEL			TYPE S	ALLOY 6082	TEMPER T6	Ix 171 357	Iy 806 191		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-134	Scale (1 : 3)		MASS 1.107	APER 394	PPER 197	x 100	y 33		
FLOORING SECTION			TYPE S	ALLOY 6082	TEMPER T6	Ix 55 170	Iy 595 670		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-135	Scale (1 : 10)		MASS 3.881	APER 687	PPER 344	x 320	y 50		
DRG NO. ICT-135			TYPE B	ALLOY 6082	TEMPER T6	Ix 320 683	Iy 9 185 298		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-137	Scale (1 : 2)		MASS 0.325	APER 170	PPER 100	x 0	y 0		
SLAT WALL EXTRUSION			TYPE S	ALLOY 6060	TEMPER T5	Ix 1 242	Iy 19 598		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-138	Scale (1 : 8)		MASS 4.044	APER 314	PPER 314	x 100	y 100		
100 DIA. X 5.0 ROUND TUBE			TYPE A	ALLOY 6082	TEMPER T6	Ix 1 688 115	Iy 1 688 115		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-139	Scale (1 : 10)		MASS 4.322	APER 648	PPER 324	x 320	y 5		
320 X 5.0 FLAT BAR			TYPE S	ALLOY 6082	TEMPER T6	Ix 3 319	Iy 13 521 269		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			

ICT SECTIONS









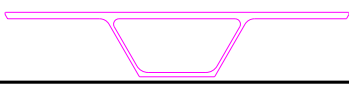
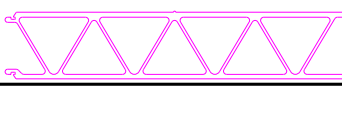
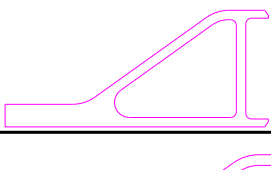
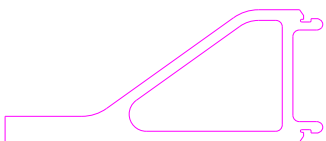
SECTION PROPERTIES

ICT-140 Scale (1 : 9) 300MM SOLID BAR CURRENT NL 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 300</td> <td>y 20</td> </tr> <tr> <td>13.000</td> <td>618</td> <td>309</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>147 137</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>27 848 677</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 300	y 20	13.000	618	309			TYPE	ALLOY	TEMPER	Ix	147 137	S	6082	T6	Iy	27 848 677	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 300	y 20																											
13.000	618	309																													
TYPE	ALLOY	TEMPER	Ix	147 137																											
S	6082	T6	Iy	27 848 677																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
ICT-145 Scale (1 : 4) 40MM X 6 TUBE CURRENT NL 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 40</td> <td>y 40</td> </tr> <tr> <td>1.737</td> <td>126</td> <td>100</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>95 492</td> </tr> <tr> <td>A</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>95 492</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 40	y 40	1.737	126	100			TYPE	ALLOY	TEMPER	Ix	95 492	A	6082	T6	Iy	95 492	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 40	y 40																											
1.737	126	100																													
TYPE	ALLOY	TEMPER	Ix	95 492																											
A	6082	T6	Iy	95 492																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
ICT-146 Scale (1 : 8) 100 X 10 ROUND TUBE CURRENT NL 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 100</td> <td>y 100</td> </tr> <tr> <td>7.662</td> <td>314</td> <td>157</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>2 898 119</td> </tr> <tr> <td>A</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>2 898 119</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 100	y 100	7.662	314	157			TYPE	ALLOY	TEMPER	Ix	2 898 119	A	6082	T6	Iy	2 898 119	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 100	y 100																											
7.662	314	157																													
TYPE	ALLOY	TEMPER	Ix	2 898 119																											
A	6082	T6	Iy	2 898 119																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
ICT-148 Scale (1 : 3) JOINER CURRENT NL 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 0</td> <td>y 0</td> </tr> <tr> <td>0.210</td> <td>131</td> <td>100</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>17 123</td> </tr> <tr> <td>S</td> <td>6063</td> <td>T5</td> <td>Iy</td> <td>505</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>6500</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 0	y 0	0.210	131	100			TYPE	ALLOY	TEMPER	Ix	17 123	S	6063	T5	Iy	505	40 Kg Pack	0	Len 1	Len 2				6500	0	
MASS	APER	PPER	x 0	y 0																											
0.210	131	100																													
TYPE	ALLOY	TEMPER	Ix	17 123																											
S	6063	T5	Iy	505																											
40 Kg Pack	0	Len 1	Len 2																												
		6500	0																												
ICT-149 Scale (1 : 9) TEE SECTION CURRENT NL 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 267</td> <td>y 110</td> </tr> <tr> <td>9.288</td> <td>740</td> <td>370</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>1 761 597</td> </tr> <tr> <td>S</td> <td>6063</td> <td>T6</td> <td>Iy</td> <td>22 842 068</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>6500</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 267	y 110	9.288	740	370			TYPE	ALLOY	TEMPER	Ix	1 761 597	S	6063	T6	Iy	22 842 068	40 Kg Pack	0	Len 1	Len 2				6500	0	
MASS	APER	PPER	x 267	y 110																											
9.288	740	370																													
TYPE	ALLOY	TEMPER	Ix	1 761 597																											
S	6063	T6	Iy	22 842 068																											
40 Kg Pack	0	Len 1	Len 2																												
		6500	0																												
ICT-151 Scale (1 : 2) STAIR TREAD CURRENT NL 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 0</td> <td>y 0</td> </tr> <tr> <td>0.605</td> <td>202</td> <td>101</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>8 525</td> </tr> <tr> <td>S</td> <td>6063</td> <td>T5</td> <td>Iy</td> <td>116 225</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>6500</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 0	y 0	0.605	202	101			TYPE	ALLOY	TEMPER	Ix	8 525	S	6063	T5	Iy	116 225	40 Kg Pack	0	Len 1	Len 2				6500	0	
MASS	APER	PPER	x 0	y 0																											
0.605	202	101																													
TYPE	ALLOY	TEMPER	Ix	8 525																											
S	6063	T5	Iy	116 225																											
40 Kg Pack	0	Len 1	Len 2																												
		6500	0																												
ICT-152 Scale (1 : 11) 140 DIA X 10 TUBE CURRENT NL 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 140</td> <td>y 140</td> </tr> <tr> <td>11.068</td> <td>440</td> <td>440</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>8 678 650</td> </tr> <tr> <td>A</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>8 678 650</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 140	y 140	11.068	440	440			TYPE	ALLOY	TEMPER	Ix	8 678 650	A	6082	T6	Iy	8 678 650	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 140	y 140																											
11.068	440	440																													
TYPE	ALLOY	TEMPER	Ix	8 678 650																											
A	6082	T6	Iy	8 678 650																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
ICT-153 Scale (1 : 5) CORNER SECTION CURRENT NL 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 55</td> <td>y 55</td> </tr> <tr> <td>0.713</td> <td>181</td> <td>100</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>74 290</td> </tr> <tr> <td>S</td> <td>6063</td> <td>T5</td> <td>Iy</td> <td>74 290</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 55	y 55	0.713	181	100			TYPE	ALLOY	TEMPER	Ix	74 290	S	6063	T5	Iy	74 290	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 55	y 55																											
0.713	181	100																													
TYPE	ALLOY	TEMPER	Ix	74 290																											
S	6063	T5	Iy	74 290																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
ICT-155 Scale (1 : 8) 150 X 100 'I' BEAM CURRENT NL 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 150</td> <td>y 100</td> </tr> <tr> <td>7.618</td> <td>678</td> <td>339</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>1 669 628</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>11 040 441</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 150	y 100	7.618	678	339			TYPE	ALLOY	TEMPER	Ix	1 669 628	S	6082	T6	Iy	11 040 441	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 150	y 100																											
7.618	678	339																													
TYPE	ALLOY	TEMPER	Ix	1 669 628																											
S	6082	T6	Iy	11 040 441																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
ICT-160 Scale (1 : 3) SLEEVE CURRENT NL 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 0</td> <td>y 0</td> </tr> <tr> <td>1.584</td> <td>251</td> <td>251</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>58 120</td> </tr> <tr> <td>B</td> <td>6060</td> <td>T4</td> <td>Iy</td> <td>495 688</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 0	y 0	1.584	251	251			TYPE	ALLOY	TEMPER	Ix	58 120	B	6060	T4	Iy	495 688	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 0	y 0																											
1.584	251	251																													
TYPE	ALLOY	TEMPER	Ix	58 120																											
B	6060	T4	Iy	495 688																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
ICT-162 Scale (1 : 1) INFILL CURRENT NL 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 0</td> <td>y 0</td> </tr> <tr> <td>0.068</td> <td>45</td> <td>100</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>51</td> </tr> <tr> <td>S</td> <td>6063.3</td> <td>T5</td> <td>Iy</td> <td>431</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>6500</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 0	y 0	0.068	45	100			TYPE	ALLOY	TEMPER	Ix	51	S	6063.3	T5	Iy	431	40 Kg Pack	0	Len 1	Len 2				6500	0	
MASS	APER	PPER	x 0	y 0																											
0.068	45	100																													
TYPE	ALLOY	TEMPER	Ix	51																											
S	6063.3	T5	Iy	431																											
40 Kg Pack	0	Len 1	Len 2																												
		6500	0																												
ICT-163 Scale (1 : 10) LIGHT DECKING CURRENT NL 	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 325</td> <td>y 25</td> </tr> <tr> <td>4.749</td> <td>723</td> <td>361</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>192 886</td> </tr> <tr> <td>C</td> <td>NV6082</td> <td>T6</td> <td>Iy</td> <td>17 022 893</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 325	y 25	4.749	723	361			TYPE	ALLOY	TEMPER	Ix	192 886	C	NV6082	T6	Iy	17 022 893	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 325	y 25																											
4.749	723	361																													
TYPE	ALLOY	TEMPER	Ix	192 886																											
C	NV6082	T6	Iy	17 022 893																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												

ICT SECTIONS













SECTION PROPERTIES

ICT Page 9 14-Oct-18

<p>ICT-166 Scale (1 : 9) STAIR TREAD</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 294</td> <td>y 65</td> </tr> <tr> <td>3.463</td> <td>826</td> <td>413</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>66 268</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>11 310 484</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 294	y 65	3.463	826	413			TYPE	ALLOY	TEMPER	Ix	66 268	S	6082	T6	Iy	11 310 484	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 294	y 65																											
3.463	826	413																													
TYPE	ALLOY	TEMPER	Ix	66 268																											
S	6082	T6	Iy	11 310 484																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-167 Scale (1 : 3) STAIR TREAD - FEMALE INSERT</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 24</td> <td>y 28</td> </tr> <tr> <td>0.344</td> <td>111</td> <td>100</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>10 736</td> </tr> <tr> <td>S</td> <td>6082</td> <td>T6</td> <td>Iy</td> <td>3 600</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 24	y 28	0.344	111	100			TYPE	ALLOY	TEMPER	Ix	10 736	S	6082	T6	Iy	3 600	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 24	y 28																											
0.344	111	100																													
TYPE	ALLOY	TEMPER	Ix	10 736																											
S	6082	T6	Iy	3 600																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-171 Scale (1 : 3) 100 X 50 X 3.0 RECT BOX</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 0</td> <td>y 0</td> </tr> <tr> <td>2.362</td> <td>300</td> <td>300</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>377 909</td> </tr> <tr> <td>A</td> <td>NV6082</td> <td>T6</td> <td>Iy</td> <td>1 137 777</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 0	y 0	2.362	300	300			TYPE	ALLOY	TEMPER	Ix	377 909	A	NV6082	T6	Iy	1 137 777	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 0	y 0																											
2.362	300	300																													
TYPE	ALLOY	TEMPER	Ix	377 909																											
A	NV6082	T6	Iy	1 137 777																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-173 Scale (1 : 4) 60 X 40 X 3.70 TEE</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 40</td> <td>y 60</td> </tr> <tr> <td>1.370</td> <td>192</td> <td>192</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>149 832</td> </tr> <tr> <td>S</td> <td>NV6082</td> <td>T6</td> <td>Iy</td> <td>32 694</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>6500</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 40	y 60	1.370	192	192			TYPE	ALLOY	TEMPER	Ix	149 832	S	NV6082	T6	Iy	32 694	40 Kg Pack	0	Len 1	Len 2				6500	0	
MASS	APER	PPER	x 40	y 60																											
1.370	192	192																													
TYPE	ALLOY	TEMPER	Ix	149 832																											
S	NV6082	T6	Iy	32 694																											
40 Kg Pack	0	Len 1	Len 2																												
		6500	0																												
<p>ICT-177 Scale (1 : 10) TOP HAT 112M</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 320</td> <td>y 61</td> </tr> <tr> <td>6.639</td> <td>698</td> <td>349</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>1 093 426</td> </tr> <tr> <td>B</td> <td>NV6082</td> <td>T6</td> <td>Iy</td> <td>12 994 823</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 320	y 61	6.639	698	349			TYPE	ALLOY	TEMPER	Ix	1 093 426	B	NV6082	T6	Iy	12 994 823	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 320	y 61																											
6.639	698	349																													
TYPE	ALLOY	TEMPER	Ix	1 093 426																											
B	NV6082	T6	Iy	12 994 823																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-180 Scale (1 : 8) 140 X 55 'T'</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 55</td> <td>y 140</td> </tr> <tr> <td>4.158</td> <td>391</td> <td>391</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>3 299 120</td> </tr> <tr> <td>S</td> <td>NV6082</td> <td>T6</td> <td>Iy</td> <td>107 090</td> </tr> <tr> <td>40 Kg Pack</td> <td>1</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>6500</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 55	y 140	4.158	391	391			TYPE	ALLOY	TEMPER	Ix	3 299 120	S	NV6082	T6	Iy	107 090	40 Kg Pack	1	Len 1	Len 2				6500	0	
MASS	APER	PPER	x 55	y 140																											
4.158	391	391																													
TYPE	ALLOY	TEMPER	Ix	3 299 120																											
S	NV6082	T6	Iy	107 090																											
40 Kg Pack	1	Len 1	Len 2																												
		6500	0																												
<p>ICT-183 Scale (1 : 4) 35MM JOINER</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 36</td> <td>y 66</td> </tr> <tr> <td>2.948</td> <td>190</td> <td>190</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>302 841</td> </tr> <tr> <td>S</td> <td>NV6082</td> <td>T6</td> <td>Iy</td> <td>46 595</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 36	y 66	2.948	190	190			TYPE	ALLOY	TEMPER	Ix	302 841	S	NV6082	T6	Iy	46 595	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 36	y 66																											
2.948	190	190																													
TYPE	ALLOY	TEMPER	Ix	302 841																											
S	NV6082	T6	Iy	46 595																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-186 Scale (1 : 3) PEG</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 115</td> <td>y 20</td> </tr> <tr> <td>3.353</td> <td>258</td> <td>258</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>28 480</td> </tr> <tr> <td>S</td> <td>NV6082</td> <td>T6</td> <td>Iy</td> <td>1 438 682</td> </tr> <tr> <td>40 Kg Pack</td> <td>1</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>6500</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 115	y 20	3.353	258	258			TYPE	ALLOY	TEMPER	Ix	28 480	S	NV6082	T6	Iy	1 438 682	40 Kg Pack	1	Len 1	Len 2				6500	0	
MASS	APER	PPER	x 115	y 20																											
3.353	258	258																													
TYPE	ALLOY	TEMPER	Ix	28 480																											
S	NV6082	T6	Iy	1 438 682																											
40 Kg Pack	1	Len 1	Len 2																												
		6500	0																												
<p>ICT-187 Scale (1 : 7) 6MM TUNNEL</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 320</td> <td>y 60</td> </tr> <tr> <td>7.064</td> <td>708</td> <td>708</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>995 061</td> </tr> <tr> <td>B</td> <td>NV6082</td> <td>T6</td> <td>Iy</td> <td>17 350 280</td> </tr> <tr> <td>40 Kg Pack</td> <td>0</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 320	y 60	7.064	708	708			TYPE	ALLOY	TEMPER	Ix	995 061	B	NV6082	T6	Iy	17 350 280	40 Kg Pack	0	Len 1	Len 2				0	0	
MASS	APER	PPER	x 320	y 60																											
7.064	708	708																													
TYPE	ALLOY	TEMPER	Ix	995 061																											
B	NV6082	T6	Iy	17 350 280																											
40 Kg Pack	0	Len 1	Len 2																												
		0	0																												
<p>ICT-188 Scale (1 : 10) 62MM DECK</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 320</td> <td>y 64</td> </tr> <tr> <td>11.536</td> <td>885</td> <td>442</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>2 770 733</td> </tr> <tr> <td>C</td> <td>NV6082</td> <td>T6</td> <td>Iy</td> <td>34 982 512</td> </tr> <tr> <td>40 Kg Pack</td> <td>1</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>6500</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 320	y 64	11.536	885	442			TYPE	ALLOY	TEMPER	Ix	2 770 733	C	NV6082	T6	Iy	34 982 512	40 Kg Pack	1	Len 1	Len 2				6500	0	
MASS	APER	PPER	x 320	y 64																											
11.536	885	442																													
TYPE	ALLOY	TEMPER	Ix	2 770 733																											
C	NV6082	T6	Iy	34 982 512																											
40 Kg Pack	1	Len 1	Len 2																												
		6500	0																												
<p>ICT-189 Scale (1 : 4) 62MM TRANSITION FEMALE</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 140</td> <td>y 62</td> </tr> <tr> <td>5.231</td> <td>388</td> <td>194</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>729 932</td> </tr> <tr> <td>B</td> <td>NV6082</td> <td>T6</td> <td>Iy</td> <td>3 265 606</td> </tr> <tr> <td>40 Kg Pack</td> <td>1</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 140	y 62	5.231	388	194			TYPE	ALLOY	TEMPER	Ix	729 932	B	NV6082	T6	Iy	3 265 606	40 Kg Pack	1	Len 1	Len 2				0	0	
MASS	APER	PPER	x 140	y 62																											
5.231	388	194																													
TYPE	ALLOY	TEMPER	Ix	729 932																											
B	NV6082	T6	Iy	3 265 606																											
40 Kg Pack	1	Len 1	Len 2																												
		0	0																												
<p>ICT-190 Scale (1 : 5) 62MM TRANSITION MALE</p>  <p>CURRENT NL</p>	<table border="1"> <tr> <td>MASS</td> <td>APER</td> <td>PPER</td> <td>x 149</td> <td>y 62</td> </tr> <tr> <td>5.608</td> <td>416</td> <td>208</td> <td></td> <td></td> </tr> <tr> <td>TYPE</td> <td>ALLOY</td> <td>TEMPER</td> <td>Ix</td> <td>830 870</td> </tr> <tr> <td>B</td> <td>NV6082</td> <td>T6</td> <td>Iy</td> <td>4 040 096</td> </tr> <tr> <td>40 Kg Pack</td> <td>1</td> <td>Len 1</td> <td>Len 2</td> <td></td> </tr> <tr> <td></td> <td></td> <td>0</td> <td>0</td> <td></td> </tr> </table>	MASS	APER	PPER	x 149	y 62	5.608	416	208			TYPE	ALLOY	TEMPER	Ix	830 870	B	NV6082	T6	Iy	4 040 096	40 Kg Pack	1	Len 1	Len 2				0	0	
MASS	APER	PPER	x 149	y 62																											
5.608	416	208																													
TYPE	ALLOY	TEMPER	Ix	830 870																											
B	NV6082	T6	Iy	4 040 096																											
40 Kg Pack	1	Len 1	Len 2																												
		0	0																												

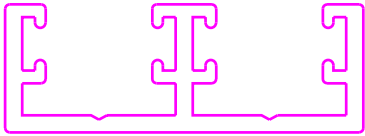







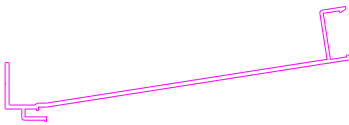



ICT SECTIONS

SECTION PROPERTIES

ICT-191	Scale (1 : 2)		MASS 3.015	APER 173	PPER 173	x 60	y 20
PEG - BHD'S			TYPE S	ALLOY NV6082	TEMPER T6	Ix 36 958	Iy 299 816
CURRENT	NL		40 Kg Pack 5	Len 1 6500	Len 2 0		
ICT-192	Scale (1 : 4)		MASS 4.282	APER 220	PPER 220	x 40	y 71
112M JOINER NO TOP			TYPE S	ALLOY NV6082	TEMPER T6	Ix 739 969	Iy 84 616
CURRENT	NL		40 Kg Pack 2	Len 1 6500	Len 2 0		
ICT-201	Scale (1 : 10)		MASS 7.969	APER 724	PPER 724	x 320	y 71
TOP HAT			TYPE B	ALLOY NV6082	TEMPER T6	Ix 1 379 998	Iy 20 001 246
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-202	Scale (1 : 10)		MASS 6.940	APER 741	PPER 370	x 320	y 36
35MM 2 TONNE AXLE DECKING			TYPE C	ALLOY NV6082	TEMPER T6	Ix 521 602	Iy 22 557 557
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-203	Scale (1 : 4)		MASS 2.894	APER 319	PPER 160	x 127	y 35
JOINER			TYPE B	ALLOY NV6082	TEMPER T6	Ix 102 617	Iy 1 509 054
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-204	Scale (1 : 4)		MASS 2.739	APER 307	PPER 154	x 120	y 35
JOINER			TYPE B	ALLOY NV6082	TEMPER T6	Ix 90 090	Iy 1 220 906
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-210	Scale (1 : 8)		MASS 5.594	APER 389	PPER 389	x 100	y 100
WINDOW POST			TYPE B	ALLOY NV6082	TEMPER T6	Ix 3 169 416	Iy 2 938 798
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-211	Scale (1 : 5)		MASS 3.546	APER 467	PPER 318	x 163	y 36
35MM DECK HALF PANEL			TYPE C	ALLOY NV6082	TEMPER T6	Ix 265 416	Iy 2 962 854
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-212	Scale (1 : 3)		MASS 1.279	APER 244	PPER 244	x 100	y 22
WEATHER SEAL ANGLE			TYPE S	ALLOY 6060	TEMPER T5	Ix 9 860	Iy 474 064
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-213	Scale (1 : 4)		MASS 1.745	APER 330	PPER 330	x 130	y 17
WEATHER SEAL LIP			TYPE S	ALLOY 6060	TEMPER T5	Ix 14 501	Iy 1 059 072
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-214	Scale (1 : 4)		MASS 0.701	APER 253	PPER 126	x 107	y 8
SKIRTING SECTION			TYPE S	ALLOY 6060	TEMPER T5	Ix 1 430	Iy 250 646
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-218	Scale (1 : 5)		MASS 1.385	APER 193	PPER 193	x 40	y 60
T - 60 X 40			TYPE S	ALLOY NV6082	TEMPER T6	Ix 157 598	Iy 31 939
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		

ICT SECTIONS













SECTION PROPERTIES

ICT-219	Scale (1 : 1)		MASS 0.355	APER 179	PPER 100	x 34	y 12
SLIDING DOOR TRACK			TYPE S	ALLOY 6063	TEMPER T6	Ix 2 083	Iy 16 306
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
ICT-220	Scale (1 : 2)		MASS 0.524	APER 257	PPER 128	x 34	y 25
SLIDING DOOR TRACK 25MM			TYPE S	ALLOY 6063	TEMPER T6	Ix 14 449	Iy 26 969
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
ICT-221	Scale (1 : 3)		MASS 1.389	APER 113	PPER 113	x 20	y 30
PEG			TYPE S	ALLOY NV6082	TEMPER T6	Ix 33 724	Iy 16 958
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
ICT-222	Scale (1 : 10)		MASS 5.381	APER 708	PPER 708	x 320	y 60
4MM TUNNEL			TYPE B	ALLOY NV6082	TEMPER T6	Ix 941 593	Iy 12 086 637
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
ICT-223	Scale (1 : 10)		MASS 6.623	APER 723	PPER 723	x 320	y 70
CURVED TUNNEL			TYPE B	ALLOY 6082	TEMPER T6	Ix 1 333 392	Iy 14 914 547
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
ICT-224	Scale (1 : 10)		MASS 5.066	APER 694	PPER 694	x 320	y 60
TOP HAT			TYPE B	ALLOY NV6082	TEMPER T6	Ix 838 204	Iy 12 342 378
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
ICT-225	Scale (1 : 4)		MASS 3.113	APER 208	PPER 208	x 47	y 47
JOINER			TYPE S	ALLOY NV6082	TEMPER T6	Ix 231 909	Iy 96 088
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
ICT-226	Scale (1 : 7)		MASS 2.589	APER 677	PPER 338	x 217	y 35
CHANNEL			TYPE S	ALLOY 6060	TEMPER T5	Ix 82 818	Iy 4 798 461
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
ICT-227	Scale (1 : 8)		MASS 2.951	APER 764	PPER 382	x 262	y 87
CHANNEL			TYPE S	ALLOY 6060	TEMPER T5	Ix 416 860	Iy 8 568 838
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
ICT-228	Scale (1 : 10)		MASS 4.819	APER 451	PPER 451	x 149	y 125
SILL			TYPE B	ALLOY NV6082	TEMPER T6	Ix 3 084 439	Iy 4 196 545
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
ICT-229	Scale (1 : 8)		MASS 4.449	APER 418	PPER 418	x 147	y 104
SILL			TYPE B	ALLOY NV6082	TEMPER T6	Ix 1 949 315	Iy 3 754 952
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	
ICT-230	Scale (1 : 7)		MASS 1.912	APER 510	PPER 302	x 105	y 93
MANTA EXTRUSION			TYPE S	ALLOY 6060	TEMPER T5	Ix 838 036	Iy 589 117
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0	

ICT SECTIONS

SECTION PROPERTIES






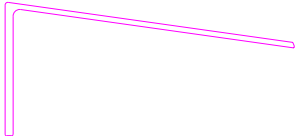




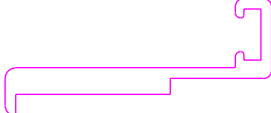

ICT Page 12 14-Oct-18

ICT-231	Scale (1 : 3)		MASS 0.849	APER 212	PPER 106	x 58	y 39		
END TUBE			TYPE B	ALLOY 6060	TEMPER T5	Ix Iy	47 317 76 603		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-232	Scale (1 : 5)		MASS 1.495	APER 278	PPER 139	x 98	y 59		
UP-LIGHT EXTRUSION			TYPE C	ALLOY 6060	TEMPER T5	Ix Iy	160 322 290 449		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-233	Scale (1 : 5)		MASS 1.056	APER 241	PPER 170	x 59	y 59		
CURVED CORNER 15MM			TYPE B	ALLOY 6060	TEMPER T5	Ix Iy	120 087 120 087		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-234	Scale (1 : 3)		MASS 0.492	APER 181	PPER 100	x 27	y 27		
MITRE CORNER 15MM			TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	13 019 13 019		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-235	Scale (1 : 7)		MASS 0.912	APER 211	PPER 211	x 32	y 81		
BULLNOSE MOULDING			TYPE B	ALLOY 6060	TEMPER T5	Ix Iy	155 681 51 394		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-236	Scale (1 : 2)		MASS 0.240	APER 92	PPER 100	x 12	y 25		
SHELF FRONT			TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	5 757 1 110		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-237	Scale (1 : 4)		MASS 0.386	APER 146	PPER 100	x 12	y 52		
SHELF REAR			TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	33 434 1 367		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-238	Scale (1 : 4)		MASS 0.528	APER 198	PPER 102	x 50	y 50		
ANGLE 50 X 50			TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	48 640 48 640		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-239	Scale (1 : 10)		MASS 2.594	APER 592	PPER 380	x 200	y 127		
20CM EXTRUSION			TYPE B	ALLOY 6060	TEMPER T5	Ix Iy	888 599 4 633 401		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-240	Scale (1 : 7)		MASS 1.415	APER 425	PPER 215	x 144	y 90		
CLIP-IN ANGLE			TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	441 734 965 946		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-241	Scale (1 : 6)		MASS 1.409	APER 218	PPER 109	x 40	y 70		
TEE SECTION			TYPE S	ALLOY NV6082	TEMPER T6	Ix Iy	269 093 30 032		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-242	Scale (1 : 7)		MASS 1.722	APER 246	PPER 246	x 45	y 80		
TEE SECTION			TYPE S	ALLOY NV6082	TEMPER T6	Ix Iy	414 531 44 024		
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			

ICT SECTIONS










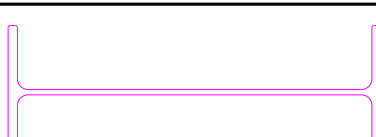
SECTION PROPERTIES

ICT Page 13 14-Oct-18

ICT-243	Scale (1 : 12)		MASS 10.323	APER 874	PPER 437	x 150	y 150
"I" BEAM			TYPE S	ALLOY NV6082	TEMPER T6	Ix 5 618 361	Iy 15 940 322
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-244	Scale (1 : 12)		MASS 11.415	APER 1018	PPER 509	x 220	y 150
"I" BEAM			TYPE S	ALLOY NV6082	TEMPER T6	Ix 5 619 216	Iy 37 215 942
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-245	Scale (1 : 3)		MASS 0.608	APER 126	PPER 100	x 32	y 32
32 X 1.80 SHS - 3MM INTERNAL C			TYPE A	ALLOY 6005A	TEMPER T5	Ix 34 373	Iy 34 373
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-246	Scale (1 : 4)		MASS 1.028	APER 179	PPER 100	x 40	y 50
50 X 40 INT			TYPE S	ALLOY NV6082	TEMPER T6	Ix 89 945	Iy 29 385
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-247	Scale (1 : 3)		MASS 0.796	APER 154	PPER 154	x 50	y 35
BENCHTOP NOSING			TYPE B	ALLOY 6060	TEMPER T5	Ix 33 993	Iy 65 817
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-248	Scale (1 : 8)		MASS 3.945	APER 632	PPER 316	x 217	y 100
OUTBOARD CHANNEL SECTION			TYPE S	ALLOY NV6082	TEMPER T6	Ix 938 781	Iy 7 289 532
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-249	Scale (1 : 2)		MASS 0.162	APER 93	PPER 100	x 29	y 14
CORNER JOINER			TYPE S	ALLOY 6060	TEMPER T5	Ix 1 174	Iy 2 499
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-250	Scale (1 : 1)		MASS 0.139	APER 86	PPER 100	x 27	y 10
JOINER			TYPE S	ALLOY 6060	TEMPER T5	Ix 683	Iy 1 930
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-251	Scale (1 : 2)		MASS 0.168	APER 104	PPER 100	x 27	y 19
JOINER			TYPE S	ALLOY 6060	TEMPER T5	Ix 3 358	Iy 1 968
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-252	Scale (1 : 1)		MASS 0.117	APER 50	PPER 100	x 9	y 11
WALL BOARD FRAMING			TYPE S	ALLOY 6060	TEMPER T5	Ix 620	Iy 297
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-253	Scale (1 : 2)		MASS 0.664	APER 155	PPER 100	x 50	y 22
DOOR JAMB ANGLE			TYPE S	ALLOY 6060	TEMPER T5	Ix 4 524	Iy 63 139
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		
ICT-254	Scale (1 : 4)		MASS 1.080	APER 275	PPER 141	x 130	y 9
DOOR JAMB			TYPE S	ALLOY 6060	TEMPER T5	Ix 520	Iy 581 883
CURRENT	NL		40 Kg Pack 0	Len 1 0	Len 2 0		

ICT SECTIONS







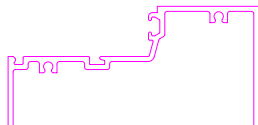




SECTION PROPERTIES

ICT-255	Scale (1 : 2)		MASS 0.220	APER 110	PPER 100	x 19	y 24		
JOINER			TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	2 781	2 114	
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-256	Scale (1 : 3)		MASS 0.204	APER 108	PPER 100	x 9	y 40		
JOINER			TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	15 958	192	
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-257	Scale (1 : 2)		MASS 0.463	APER 168	PPER 100	x 50	y 22		
CHANNEL			TYPE S	ALLOY 6060	TEMPER T5	Ix Iy	3 900	48 421	
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-258	Scale (1 : 3)		MASS 0.590	APER 222	PPER 111	x 0	y 0		
CEILING PANEL JOINER			TYPE S	ALLOY 6063	TEMPER T5	Ix Iy	0	0	
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-259	Scale (1 : 2)		MASS 0.339	APER 136	PPER 100	x 25	y 25		
CORNER JOINER 6 MMM			TYPE A	ALLOY 6060	TEMPER T5	Ix Iy	4 101	4 101	
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-260	Scale (1 : 3)		MASS 0.453	APER 181	PPER 100	x 0	y 0		
CORNER JOINER			TYPE A	ALLOY 6060	TEMPER T5	Ix Iy	0	0	
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-502	Scale (1 : 8)		MASS 6.571	APER 858	PPER 429	x 240	y 100		
'I' BEAM			TYPE S	ALLOY 6082	TEMPER T6	Ix Iy	1 235 834	23 006 723	
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-503	Scale (1 : 8)		MASS 6.868	APER 725	PPER 362	x 267	y 100		
TEE SECTION			TYPE S	ALLOY 6082	TEMPER T6	Ix Iy	916 762	18 297 278	
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-504	Scale (1 : 8)		MASS 5.515	APER 933	PPER 467	x 280	y 100		
'I' BEAM			TYPE S	ALLOY 6082	TEMPER T6	Ix Iy	742 828	24 622 303	
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			
ICT-505	Scale (1 : 8)		MASS 6.816	APER 933	PPER 467	x 280	y 100		
'I' BEAM			TYPE S	ALLOY 6082	TEMPER T6	Ix Iy	1 159 468	33 238 536	
CURRENT	NL		40 Kg Pack	0	Len 1 0	Len 2 0			

PWD SECTIONS

SECTION PROPERTIES

PWD Page 1 17-Apr-16

PWD-237	Scale (1 : 2)		MASS 0.455	APER 175	PPER 100	x	0	y	0
SASH STILE			TYPE S	ALLOY 6063	TEMPER T5	Ix Iy			8 055 15 273
CURRENT	NL		40 Kg Pack	14	Len 1 6500	Len 2 6000			
PWD-238	Scale (1 : 2)		MASS 0.642	APER 250	PPER 185	x	0	y	0
TOP RAIL			TYPE S	ALLOY 6063	TEMPER T5	Ix Iy			21 616 22 821
CURRENT	NL		40 Kg Pack	10	Len 1 6500	Len 2 6000			
PWD-239	Scale (1 : 3)		MASS 1.031	APER 301	PPER 242	x	0	y	0
UPPER MEETING RAIL			TYPE B	ALLOY 6063	TEMPER T5	Ix Iy			68 350 68 698
CURRENT	NL		40 Kg Pack	6	Len 1 6500	Len 2 6000			
PWD-240	Scale (1 : 2)		MASS 0.825	APER 227	PPER 162	x	0	y	0
LOWER MEETING PLACE			TYPE B	ALLOY 6063	TEMPER T5	Ix Iy			32 318 33 309
CURRENT	NL		40 Kg Pack	7	Len 1 6500	Len 2 6000			
PWD-241	Scale (1 : 3)		MASS 0.928	APER 230	PPER 176	x	0	y	0
BOTTOM RAIL			TYPE B	ALLOY 6063	TEMPER T5	Ix Iy			49 924 63 480
CURRENT	NL		40 Kg Pack	7	Len 1 6500	Len 2 6000			
PWD-242	Scale (1 : 1)		MASS 0.231	APER 88	PPER 100	x	0	y	0
SASH BEAD			TYPE S	ALLOY 6063	TEMPER T5	Ix Iy			2 155 2 416
CURRENT	NL		40 Kg Pack	27	Len 1 6500	Len 2 6000			
PWD-243	Scale (1 : 3)		MASS 1.241	APER 447	PPER 224	x	0	y	0
FEMALE MULLION			TYPE S	ALLOY 6063	TEMPER T5	Ix Iy			74 186 574 380
CURRENT	NL		40 Kg Pack	0	Len 1 6500	Len 2 0			
PWD-244	Scale (1 : 3)		MASS 0.916	APER 360	PPER 180	x	0	y	0
SUB HEAD PWD NO. 2			TYPE S	ALLOY 6060	TEMPER T5	Ix Iy			26 890 556 009
CURRENT	NL		40 Kg Pack	0	Len 1 6500	Len 2 0			
PWD-246	Scale (1 : 1)		MASS 0.171	APER 101	PPER 100	x	0	y	0
P.W.D. FLUSH FILLER			TYPE S	ALLOY 6060	TEMPER T5	Ix Iy			1 567 1 841
CURRENT	NL		40 Kg Pack	0	Len 1 6500	Len 2 0			
PWD-343	Scale (1 : 2)		MASS 0.280	APER 140	PPER 100	x	0	y	0
40 MM DOOR STOP - PWD 343			TYPE S	ALLOY 6063	TEMPER T5	Ix Iy			5 462 2 135
CURRENT	NL		40 Kg Pack	0	Len 1 6500	Len 2 0			
PWD-713	Scale (1 : 2)		MASS 0.280	APER 140	PPER 100	x	0	y	0
P.W.D. 45MM DOOR STOP			TYPE S	ALLOY 6060	TEMPER T5	Ix Iy			5 462 2 093
CURRENT	NL		40 Kg Pack	0	Len 1 6500	Len 2 0			