

 G.JAMES SAFETY GLASS P/L

 ABN 86 001 230 039

 Telephone 02 9732 2111

 Facsimile
 02 9732 2199

 Web
 gjames.com

Glass Products

Pricing and Manufacturing Document

G.James Glass Products (NSW) Terms and Conditions -Effective: 18/11/2021 Supersedes: 06/09/2018

- 1. Standard Terms and Conditions as per LS1 apply
- 2. Prices quoted exclude Goods & Services Tax (G.S.T.). GST will be added at 10%
- Unless otherwise noted, quotations remain valid for a period of 30 days from date of quote
- Quote number & quoted price must be stated on purchase order, otherwise standard rates apply, and no credit request accepted
- Unless sizes provided by client at time of quote request or as otherwise stated by G.James, quotes apply to maximum sizes as follows:
 - IGU's; ceramic painted; special annealed and furnaced laminates: 3300×1500
 - Mono toughened: 4mm 3000 x1200; 5 & 6mm 3600 ×1500; 8mm 19mm 4000 × 2000
- Prices quoted are based on glass type/s, quantities and sizes indicated; any variation may require requoting
- 7. Manufacturing and Pricing document dated 01/06/2016 applies
- All products will be supplied in accordance with AS/NZS4667:2000, and published G.James Product Acceptance Standard
- 9. Safety glass supplied by G.James is in accordance with the relevant manufacturing Australian Standards
- Customer's responsibility to order product or glaze to Australian Standards.
 G.James makes no comment on the suitability of ordered items
- 11. G.James does not accept 'on-costs' associated with faulty goods. Liability is limited to resupply of the original order within the warranty period
- 12. Claims for replacement or credit for faulty goods must be made within 7 days of delivery date. Claims for credit or replacement after customer secondary processing will not be accepted
- 13. G.James takes no responsibility for any loss or damage that may arise from inability to supply the quoted product
- 14. Acceptance of order and supply of such is subject to availability and quality of raw materials
- 15. Quotation and supply of new products must first be deemed fit for purpose by G.James in-house review, including full prototype testing. Subject to the results of this testing G.James reserves the right to withdraw or revise this quotation
- 16. Leadtimes quoted are presumed as correct at time of quoting and subject to change. No costs will be accepted for late supply of orders
- 17. Standard processing and edgework quoted for only. Separate charges for panels requiring CNC processing apply
- G.James does not recommend the use of monolithic toughened glass in sheer wall glazing or balustrading, heat-soaked or otherwise
- Unless requested otherwise no allowance has been made for heat-soak testing on typical toughened glass
- 20. Technical data, calculations, and other information provided by G.James is to the best of our knowledge correct, but G.James disclaims liability for any damage, loss or injury that may result from the use of such data
- Damage or loss to G.James owned glass handling equipment (stillages, frames, etc) as used in deliveries must be paid for by customer where such equipment was placed in the customer's care or control.
- 22. Return of handling equipment within a maximum of 7 days to G.James is the customer's responsibility. A charge of \$50.00 per item per day will be applied for each day after 7 days where G.James is denied the use of its own handling equipment
- 23. Deliveries: Sydney Metro Charges
 - Standard Glass Side Loaded A Frame Truck
 - Factory Delivery: No Charge Recognised account delivery address where minimum invoice value is \$100.00.
 - Site Delivery -Side Loader: \$75.00 charge for each separate delivery for up to 30 minutes on site. Then \$50.00 for every 15min interval thereafter.
 - Timed specific Delivery A charge of \$200.00 applies when a set time by the customer is required to be met (*In Hours), this includes 30min on site, then \$50.00 for every 15min intervals thereafter
 Site Delivery -Crane Truck: \$75.00 charge for each separate delivery
 - Site Delivery -Crane Truck: \$75.00 charge for each separate delivery for up to 30 minutes on site. Then \$50.00 for every 15min interval thereafter.

- Crane Truck Deliveries
 - Factory Delivery: Flat fee of \$200.00 applies Recognised account delivery address.
 - Site Delivery -\$200.00 charge for each separate delivery for up to 30 minutes on site. Then \$62.50 for every 15min interval thereafter.
 Timed specific Delivery A charge of \$300.00 applies when a set
 - Timed specific Delivery A charge of \$300.00 applies when a set time by the customer is required to be met (*In Hours), this includes 30min on site, then \$62.50 for every 15min intervals thereafter
- Deliveries Continued
 - Site Delivery Any location other than account delivery address
 - Above prices are applicable for Sydney Metro area, all other POA
 - Crane truck deliveries only apply when requested by customer
 In hours refers to drivers standard hours when leaving factory from 6am & returning at 2.30pm
 - All out of hours deliveries are POA
 - Delivery To Third Party Processors: Once delivered and signed for, no claim for faults will be accepted
 - Above prices exclude GST
- 24. MINIMUM INVOICE VALUES:
 - Annealed mono and floor stock laminates \$50.00 pick up; \$100.00 delivered to customer factory
 - Toughened monolithic and toughened monolithic heat-soaked \$50.00 pick up; \$100.00 delivered to customer factory
 - Special annealed laminates including SG \$350.00. Includes makeup laminates not usually stocked by G.James
 - Furnaced laminates \$500.00
 - Solarplus. See Note 26 below
 - Colourlite Ceramic painted. See Note 28 below
- 25. MINIMUM CHARGING AREA PER PANEL:
 - Annealed mono and floor stock laminates 0.25m²; Toughened mono 0.3m²; Toughened mono heat-soaked 0.5m²
 - Special annealed laminate 0.5m². Includes makeup laminates not usually stocked by G.James
 - Furnaced laminate 1.0m²
 - IGU's: annealed 0.5m²; furnaced 0.75m². (Excludes furnaced laminate components)
 - Louvre blades: 0.1m² min charge area. Annealed min charge length 450mm; furnaced 750mm min charge length
 - Solarplus See Note 26 below
 - Ceramic painted glass See Note 28 below
- 26. SOLARPLUS RANGE OF REFLECTIVE GLASS
 - S108 annealed reflective observation glass using clear reflective #2, grey pvb, clear, 6.38mm
 - Minimum charging size per panel: 0.5m²
 - Minimum invoice value \$350.00
 - Thickness greater than 6.38mm
 - Minimum charging size per panel 1.0m²
 - Minimum invoice value \$500.00 annealed
 - S130 high performance reflective glass
 Minimum charging size per panel 1.0m²
 - Minimum charging size per panet 1.
 Minimum invoice value
 - Monolithic annealed or furnaced \$500.00
 - Annealed laminate \$500.00
 - Furnaced laminate \$750.00
 - IGU annealed or furnaced \$750.00
- 27. TWINGLAZE ULTRA TLE 62 IGU'S
 - With furnaced laminate
 - minimum charging size per panel 1.0m²
 - minimum invoice value \$750.00
 - All other makeups
 - minimum charging size 1.0m²
 - minimum invoice value \$400.00
- 28. COLOURLITE RANGE OF CERAMIC PAINTED GLASS
 - Colourlite SCREEN full cover (not recommended in backlit applications)
 Standard colours White, Black, Basalt, Charcoal, Pewter, Gannet, Cement
 - minimum charging size per panel 0.75m²
 - minimum charging size per panet 0.756
 minimum invoice value \$250.00
 - other colours are POA
 - Colourlite GRAPHIC decorative painted glass
 - Screened
 - standard colours White, Black, Basalt, Charcoal, Pewter, Gannet, Cement
 - minimum charging size per panel 1.0m²
 - minimum invoice value \$1000.00

Pricing and Manufacturing Document

(Continued)

- other colours are POA
- Digital
 - electronic file of artwork to be provided by client to approved GJ specifications
 - standard DipTech colour range
 - minimum charging size per panel 1.0m²
 - minimum invoice value \$1000.00
- Colourlite IMAGE digital full colour
- electronic file of artwork to be provided by client to approved GJ specifications
- minimum charging size per panel 1.0m²
 minimum invoice value \$1000.00
- 29. LAMINATED GLASS
 - May exhibit a measure of edge delamination within specification
 - Edge Slip of up to 3mm is acceptable in Laminated Glass
 - G.James recommends cover to the top edge of laminates in external applications
 - Furnaced laminates will be supplied with 1.52mm interlayer as standard unless otherwise requested on order
 - G.James refers the right to supply furnaced laminates holes with ordered hole dimension to one lite and +3mm to other
 - 4mm plates used up to maximum 3.5m² in special laminates. Sizes
 - greater minimum 5mm with increased costs
 - •

30. POA ITEMS include:

- 25mm toughened
- IGU's (unless specified)
- Special laminates, including furnaced and SG laminated glass types,
- bullet resistant, rolling stock
- All Solarplus coated glass types
- Oversized panels
- 31. INSULATED GLASS UNITS: Standard 5mm structural silicone bite. We specify the use of 100% silicone (base polymer) setting/side blocks
- SPLASHBACK GLASS: 2 pack polyurethane painted glass ordered for splash backs is of float quality for general glazing use and normal inspection and acceptance criteria will apply.
- 33. SHAPES: Simple shapes have all straight edges, and at least one square corner. Complex shapes include panels with any curved edge, glass with one or no square corners, and any panel requiring CNC polish processing
- 34. TEMPLATES: Templates must be of stable material hardboard, metal etc. and made to actual size. Templates incorporating screws or tapes, drawn lines and additions are not acceptable. A handling charge of \$40.00 per each separate template applies
- 35. G.James recommends a thermal safety assessment for all solar performing glass
- 36. Claims for losses as may be caused by NiS inclusion not accepted. NiS potential rupture of toughened glass is an accepted risk and not a glass fault
- 37. Unless otherwise stated the default placement for compliance stamp for toughened glass will be BLH corner as viewed from outside
- G.James reserves the right to amend any of its Terms and Conditions at any time
- 39. Unless otherwise stated G.James Safety Glass (NSW) Pty Ltd price lists are regarded as superseded on the first day of each calendar year
- 40. CHARGES FOR PANELS REQUIRING CNC POLISH PROCESSING; SHAPED GLASS
 - Panels that cannot be polished by normal straight line edge processing will be CNC machined and charged as curved polishing per lineal metre to edges as required, and / or any relevant cutouts as ordered.
 - Circumstances vary depending on panel size and shape but generally where polished edges are required the following will apply [See page]
- 41. GENERAL GLASS MANUFACTURING PARAMETERS
 - TOUGHENED
 - GENERAL
 - minimum charging area per panel monolithic 0.35m²
 - minimum charging area per panel monolithic heat-soaked 0.5m^{2*}
 - minimum invoice value: \$50.00 pick up; \$100.00 factory delivered (local)
 - price list rates apply to sizes not exceeding
 - 4mm 3000 x 1200 (maximum size for 4mm furnaced)
 - 5mm and 6mm 3600 x 1500
 - 8mm to 19mm 4000 x 2000
 - * EXCEPT SOLARPLUS RANGE. SEE BELOW
 - LOUVRES
 - minimum charging length for louvres 750mm and / or minimum charging area 0.1m²
 - CERAMIC PAINTED
 - SCREENED
 - Standard colours: White, Black, Cement, Charcoal, Basalt, Cement and Pewter
 - COLOURLITE (FULL COVER)
 - standard book pricing applies up to 3000 x 1500; then POA

• full cover maximum size 4500 x 2100 where screen available. G.James Glass Products (NSW) Terms and Conditions - Version 1 Issue 1 Effective: 6/09/2018

G JAMES SAFETY GLASS P/L ABN 86 001 230 039

- minimum invoice value \$250.00
 - COLOURLITE PATTERN
 - patterned maximum sizes 3200 x 1550
 minimum charging size per panel 1.0m²
 - minimum order value standard colours \$1000.00*
 - standard screened patterns:
 - 3mm Reverse Dots
 - 3mm Dots @ 3mm Spaces 90deg pattern
 - 3mm Dots @ 3mm Spacer 45deg pattern
 - 3mm Lines @ 3mm Spaces
 - Gum Leaf
 - non-standard colours: POA.
- DIGITALLY PRINTED
 - COLOURLITE GRAPHIC AND COLOURLITE IMAGE (NOT INCLUDING BORDERS FOR AUTOMOTIVE GLASS)
 - POA all jobs
 - minimum charging size per panel all glass types 1.0m²
 - maximum size 4000 x 2200 monolithic or laminated
 - minimum order value \$1000.00
 - enduser to provide electronic file to approved GJ specifications; file conversion fee of \$250 per separate drawing applies
 - standard DipTech colours apply
- LAMINATED
- ANNEALED
 - standard book cts pricing applies up to 3660 x 2440*, then POA
 - minimum charging size price list commodity items 0.25m² per panel
 - minimum charging size specials 0.5m² per panel
 - minimum invoice value specials \$350.00
 - Specials include items not on a published G.James price list, or those outside normal floor stock lines
 - SG annealed laminates minimum charging size per panel 1.0m² or \$350.00
 - maximum size stock sheets 3660 x 2440*
 - maximum size specials 5000 x 2000*, subject to raw glass
 - availability
 - FURNACED
 - all furnaced laminates are POA
 - minimum charge size per panel 1.0m²
 minimum order value \$500.00* including SG laminates
 - maximum quoted size where no size range provided, 3300 x 1500
 - mitres N/A on furnaced laminates
 - acceptance of order is dependent on sighting of final sizes.

maximum quoted size to 3300 x 1500; then subject to repricing

including furnaced laminates or Solarplus products.)

G.James Twinglaze units are being installed

EXCEPT SOLARPLUS RANGE. SEE BELOW

Terms and Conditions of Quotation / Sale

minimum invoice value \$400.00

STANDARD COATING LOW E TLE62:

maximum size 3500 x 2050

furnaced laminate. IGU

\$350.00 as annealed

maximum size 3500 x 2050

IGU configured only

minimum order value annealed \$200; furnaced \$250.00*

minimum charge size for all glass types per panel 1.0m²

STANDARD COATINGS HIGH REFLECTIVE S108 AND S130:

- maximum size 4200 x 2200*, 4200 x 2000 online coated, or as available in raw glass
- NB: SOME TOUGHENED LAMINATES REQUIRE SPECIAL PROCESSING OR VACUUM BAGGING. QUOTATIONS ARE SUBJECT TO SIGHTING OF FINAL SIZES AND PROCESSING.

minimum charging size per panel annealed 0.5m², furnaced 0.75m². (Not

unless requested otherwise G.James Twinglaze units are supplied with a

standard 5mm bite using structural silicone. We specify the use of 100%

all G.James Solarplus coated products are POA or as outlined above in

available as mono annealed, mono furnaced, annealed laminate,

minimum invoice value \$500.00, except S108 Observation Laminate

Page 2 of 2

silicone (base polymer) setting/side blocks for all applications when

• * EXCEPT SOLARPLUS RANGE. SEE BELOW

maximum makeable size 3600 x 2440*

42. TWINGLAZE INSULATED GLASS UNITS

minimum size 400 x 400*

43. SOLARPLUS RANGE OF COATED GLASS


•

all G.James Twinglaze IGU's are POA

Pricing and Manufacturing Document

(Continued)

Shapes

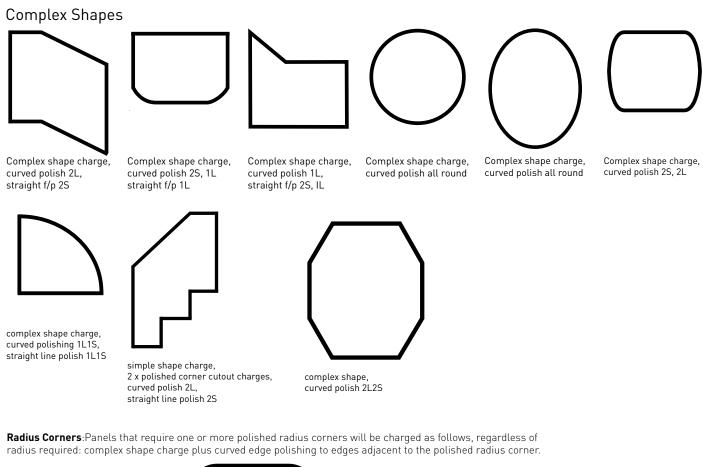








complex shape charge, curved polishing 1L1S, straight line polish 1L1S


complex shape charge, curved polish 2L2S

Simple Shapes









Unpolished trunc corner

Unpolished rad corner

Complex Shapes

No CNC processing required if ordered with polished edges



G.James Glass Products (NSW) Terms and Conditions - Version 1 Issue 1 Effective: 6/09/2018