

# Quotation/Sale

## Terms and Conditions (VIC)


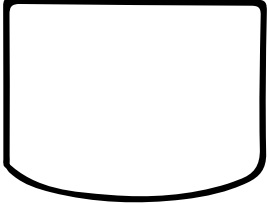
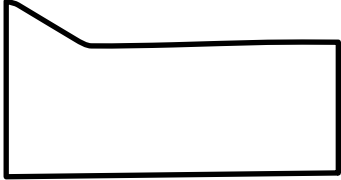








Effective: 27/11/2023

1. Standard Terms and Conditions as per LSI apply.
2. Prices quoted exclude Goods & Services Tax (GST) which will be added at 10%.
3. Unless otherwise noted, quotations remain valid for a period of 30 days from the date of quote.
4. Quote number or quoted price must be stated on the purchase order, otherwise standard rates apply, and no credit request accepted for price variance.
5. When sizes are not provided, quoted rates are based on a cutting yield of 85% and a maximum size of 3000mm x 2000mm.
6. Panel sizes greater than 3000mm x 2000mm are considered oversize and may attract a surcharge.
7. Quoted rates are based on glass type/s, quantities, and sizes provided, consequently, any variations will require re quoting.
8. All products will be supplied in accordance with AS/NZS4466:2000, and G.James published Product Acceptance Standard.
9. All Grade 'A' safety glass will be supplied in accordance with the relevant manufacturing Australian Standards.
10. It is the buyer's responsibility to order and/or glaze products in accordance with the appropriate Australian Standards. G.James makes no comment on the suitability of items ordered.
11. G.James does not accept 'on-costs' associated with faulty goods. Liability is limited to the resupply of the original order within the warranty period.
12. Claims for replacement or credit for faulty goods must be made within seven (7) days of the delivery date. Claims for credit or replacement after any third-party secondary processing will not be accepted.
13. Orders are subject to the availability and quality of raw materials. G.James takes no responsibility for any loss or damage that may arise from our inability to supply the quoted product.
14. Quotation and supply of new products must first be deemed fit for purpose by G.James and may include full prototype test-ing. Subject to the results of this testing, G.James reserves the right to withdraw or revise this quotation.
15. Lead times quoted are presumed correct at the time of quoting and are subject to change. No 'on-costs' / liquidated damages will be accepted for the late supply of orders.
16. Any special processing, including CNC machining, is excluded unless itemised on our quotation.
17. Heat-soak testing of toughened glass is excluded unless itemised on our quotation.
18. The customer is responsible for any damage or loss to G.James-owned glass handling equipment (e.g. stillages, frames, etc.) used for delivery, where such equipment has been placed in the customer's care or control. Repair/replacement charges will be billed accordingly.
19. The customer is responsible for the return of G.James-owned handling equipment within seven (7) days. A charge of \$50.00 per item per day will be charged for each day after seven (7) days.
20. **Deliveries**
  - All prices are quoted F.I.S. (customer's factory) within Melbourne area.
  - Site deliveries: All site delivery charges are Price On Application (P.O.A.)
  - Delivery to customer's factory: Delivery allows for side loader ONLY. An additional charge (P.O.A.) will apply if a crane truck is requested.
  - Delivery to third-party processors: Delivery allows for side loader ONLY. An additional charge (P.O.A.) will apply if a crane truck is requested. Once delivered/signed for by a third party, no claim for faults will be accepted.
  - Intrastate and interstate: P.O.A.
21. **Minimum Invoice Values – Pick-Ups & F.I.S. (Customer's Factory) Deliveries** (All prices below are ex GST and delivered unless stated otherwise)
  - Annealed float and standard laminates - \$50.00 pick-up; \$100.00 delivered.
  - Toughened glass - \$50.00 pick-up; \$100.00 delivered.
  - Special annealed laminates including SG laminates - \$690.00. Price includes non-stock make-ups.
  - Special annealed laminates including SG laminates - \$350.00.
  - Furnaced laminates - \$690.00.
  - Low-E TLE62 products - \$400.00.
  - Solarplus range (S108 & S130): annealed, laminates, and furnaced laminates - \$500.00.
  - IGU's (based on unit make-up): annealed - \$200.00; furnaced monolithic - \$250.00; DLE - \$400.00; and furnaced laminates - \$750.00.
  - ColourLite: Screen - \$250.00; Pattern or Image monolithic - \$750.00; furnaced laminates - \$1000.00.
22. **Minimum Charging Area Per Panel**
  - Annealed monolithic & standard laminates - 0.3m<sup>2</sup>;
  - toughened - 0.3m<sup>2</sup>; and toughened heat-soaked - 0.3m<sup>2</sup>.
  - Special annealed laminates - 1.0m<sup>2</sup>.
- Furnaced laminates - 1.0m<sup>2</sup>.
- IGU's (based on components): Annealed and furnaced - 0.40m<sup>2</sup>, excludes furnaced laminates and Solarplus products; DLE - 1.0m<sup>2</sup> and furnaced laminates - 1.0m<sup>2</sup>.
- Louvre blades: annealed - 450mm min charge length; furnaced - 600mm min charge length.
- Solarplus range - 1.0m<sup>2</sup> excluding Solarplus Observation - 0.5m<sup>2</sup>.
- ColourLite Screen - 1.0m<sup>2</sup>; Pattern and Image - 1.0m<sup>2</sup>.
23. **Shapes**
  - Simple shapes – panels with continuous straight edges and at least one square corner.
  - Complex shapes – panels with continuous straight edges and no square corners.
  - CNC shapes – panel with any edge curved or non-continuous straight edges (e.g. kinked edge).
24. Templates must be of stable material like hardboard, metal, etc., and made to actual size. Templates comprising of screws, tapes, drawn lines, and additions are not acceptable. A handling charge of \$75 ex GST will apply for each template supplied.
25. **General**
  - G.James recommends a thermal safety assessment for all solar performance glass.
  - G.James reserves the right to amend our standard Terms and Conditions at any time.
  - Claims for losses that may be caused by NIS or other inclusions will not be accepted.
  - Unless otherwise stated on the customer order, the default placement for the toughened glass compliance stamp will be the bottom left-hand corner as viewed from outside.
- **Laminated Glass**
  - G.James recommends the top edge of laminates in external applications be protected to reduce the likelihood of delamination.
  - Furnaced laminates will be supplied with a 1.52mm interlayer as standard.
  - Holes in furnaced laminates will be supplied with the ordered hole diameter to one lite and +2mm to the other lite.
  - For special laminates, 4mm components have a maximum area 3.5m<sup>2</sup>. Sizes greater than this will require thicker glass at an increased cost.
  - Unless otherwise stated on the customer order, the default placement for the compliance stamp will be the bottom left-hand corner as viewed from outside.
- **EcoTherm® Insulated Glass Units (IGU's)**
  - IGU's are supplied with a 5mm structural silicone bite as standard. Increased bite size will incur additional costs.
  - All EcoTherm units are P.O.A.
  - Maximum quoted size: 3300mm x 1500mm; then subject to re quoting.
  - Maximum unit size: 3750mm x 2440mm<sup>2</sup>.
  - Minimum order value \$51.65\*.
  - Minimum unit size: 190mm x 360mm\*.
  - All EcoTherm units are supplied with a 5mm structural silicone bite. The use of 100% silicone (base polymer) setting/side blocks are recommended for all installations.
  - \* Excludes Solarplus products - see following point.
- **Solarplus Range - S108 & S130**
  - All Solarplus products are P.O.A. or as outlined above in this document.
  - Maximum size: 3500mm x 2050mm.
- **Low-E TLE62 Products**
  - EcoTherm configured only.
  - Maximum size: 3500mm x 2050mm.
- **ColourLite Glass**
  - **Screen**
    - o Standard colors available on clear glass: Cool White, Pewter, Iron Grey, Zen Grey, Anthracite Grey and Deep Black.
    - o Standard Colours available on low iron or tinted glass: Cool White, Pewter, Iron Grey and Deep Black.
    - o Not recommended in backlit applications.
  - **Pattern and Image**
    - o For non-standard patterns and order-specific images, a digital file of the artwork (to GJ specifications) is to be provided by the client.
- **DecraLite Splashback Glass**
  - This product is a two-pack polyurethane paint applied to glass making it suitable for internal use ONLY.

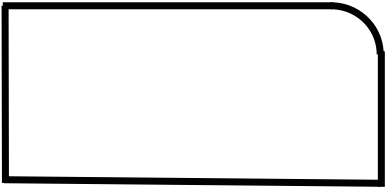

## CHARGES FOR PANELS REQUIRING CNC POLISH PROCESSING - SHAPED GLASS

Panels that cannot be polished by normal straight-line edge processing will be CNC machined and charged as Flat Polish, Complex/CNC Edge per lineal metre to edges as required, and/or any relevant cut-outs as ordered. Circumstances vary depending on panel size and shape but generally where polished edges are required the following will apply.

|   |   |   |
|---|---|---|
|    |                      |    |
| <p>Complex Shape<br/>Flat Polish, Complex/CNC Edge - All Edges</p>                  | <p>Complex Shape<br/>Flat Polish, Complex/CNC Edge - All Edges</p>                                    | <p>Complex Shape<br/>Flat Polish, Complex/CNC Edge - All Edges</p>                    |
|    |                      |    |
| <p>Complex Shape<br/>Flat Polish, Complex/CNC Edge - All Types</p>                  | <p>Complex Shape<br/>Flat Polish, Complex/CNC Edge - All Edges</p>                                    | <p>Complex Shape<br/>Flat Polish, Complex/CNC Edge - All Edges</p>                    |
|  |                    |  |
| <p>Complex Shape<br/>Flat Polish, Complex/CNC Edge - All Edges</p>                  | <p>Complex Shape<br/>Polished Corner Cut-outs x 2  <br/>Flat Polish, Complex/CNC Edge - All Edges</p> | <p>Complex Shape<br/>Flat Polish, Complex/CNC Edge - All Edges</p>                    |

Panels that require one or more polished radius corners will be charged (regardless of radius required), complex shape **plus** curved edge polishing to edges adjacent to the polished radius corner.

### Example: Any size polished radius corner



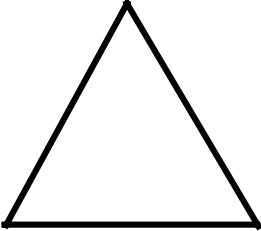
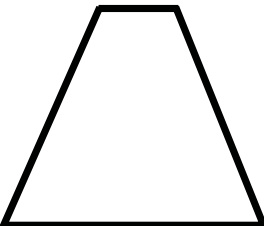





|   |  |
|---|--|
|  |  |
| <p>Complex Shape<br/>Flat Polish, Complex/CNC Edge - All Edges</p>                  | <p>Complex Shape<br/>Flat Polish, Complex/CNC Edge - All Edges</p>                   |

# Quotation/Sale

## Terms and Conditions (VIC)



Example: Complex shapes (No CNC processing is required if ordered with polished edges)

|   |   |   |
|---|---|---|
|    |    |    |
|   |   |   |
|  |  |  |

Effective: 27/11/2023

**G. James Safety Glass Pty Ltd ABN 86 001 230 039**

Telephone: + 61 3 9219 2000  
217 Rex Road Campbellfield, 3061, Victoria | gjames.com

GJ\_TermsConditionsVic\_112023