


# 048 Series Awning Window

## Standard Size Range / Configurations

		Stud Opening (Frame Size with reveals + 10mm clearance)						
		Outer Frame Size (excludes fixing fin & reveals)						
		Width						
		660	960	1260	1560	1860	2160	2460
		610	910	1210	1510	1810	2110	2410
Height (mm)	650							
	950							
	1250							
	1550							
	1850							

### Possible Awning/Fixed (F) Window Configurations

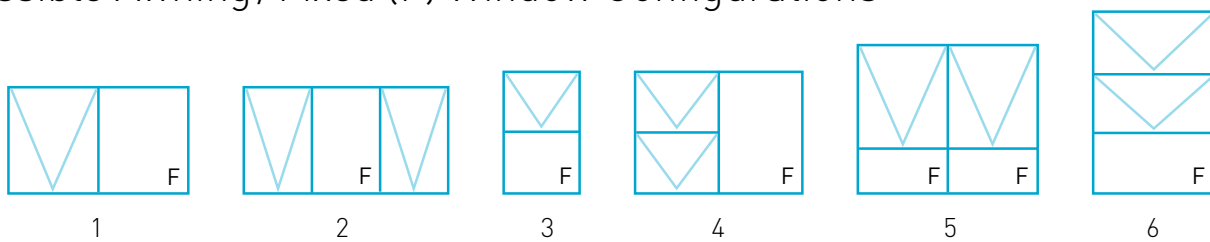

**Product Specific Notes:**


- Configurations greater than 2410mm wide available.
- Sizes detailed above are based on 'top hung' sashes with chainwinder. Certain sizes may not be available if stays and cam handle hardware option is specified.
- Black chainwinders supplied as standard. White, Silver and keyed chainwinders available on request (additional cost applies).
- Multiple bay configurations will be supplied in equal splits unless requested otherwise.
- Minimum window width for a 'centre drive' chainwinder is 540mm. Minimum window width for 'off-centre drive' winder is 450mm.

# 048 Series Casement Window

## Standard Size Range / Configurations

		Width (mm)						
		660	960	1260	1560	1860	2160	2460
		610	910	1210	1510	1810	2110	2410
Height (mm)	950							
	1250							
	1550							


### Possible Casement/Fixed (F) Window Configurations




1



2



3



4

### Opening Options:

**Left Hand Hinged**

Window opens (hinges) to the left and handle positioned on the right as viewed from the outside.

**Right Hand Hinged**

Window opens (hinges) to the right and handle positioned on the left as viewed from the outside.

### Product Specific Notes:

- When ordering, nominate the handing of the window, ie. the position, either left or right, of the handle as viewed from the outside.
- Multiple bay configurations will be supplied in equal splits unless requested otherwise.
- Black hardware supplied as standard (excluding stays). White, silver and keyed handles available on request (additional charge applies).