




G.JAMES
Windows & Doors

Awning Window 048 Series

Awning / Fixed Window combination units

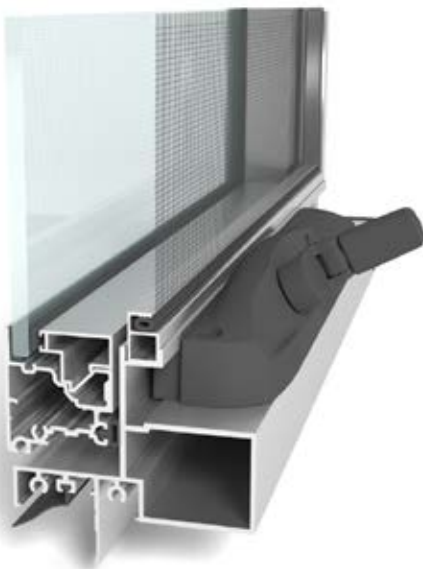

Ideally suited to either traditional or contemporary building styles, the G. James 048 Series Awning Window continues to represent great appeal for today's discerning home owner.

Awning windows by design hinge at the top (head) and project the sash outwards from the sill effectively opening a large portion of the window area to capture breezes and direct this airflow into your home's interior.

All aspects of the 048 Series window bear the inherit qualities and refinements gained from G. James' extensive history of manufacturing, NATA certified testing and site experience.

Left image: Cut-through of awning window sill with optional flyscreen (guide only, subject to change without notice).



Features

Photo courtesy of Grange Homes, Adelaide

- Large openable area for maximising ventilation
- A wide sash profile which creates an appealing 'picture frame' effect
- Flush-faced external profile promotes the shedding of dust and rain
- Continuous PVC twin-seal system provides excellent weatherproofing and acoustic (noise reducing) qualities¹
- Mitred corner joints for superior strength and torsional rigidity
- Slimline chainwinder with 304 Grade extension chain²
- Provision for fly, barrier or Crimsafe screens
- 7 year 'peace of mind' guarantee.

(Terms and conditions apply)

¹ For drainage purposes only 'single' seal fitted to bottom rail of sash.

² Chain extension can be restricted to comply with Fall Prevention from Openable Windows requirements



Example Configurations

See Page 7 for other configurations and the standard size range.

Single Bay
Awning Window



Awning Over
Awning Window



Awning Over
Fixed Window





Hardware Options

Black, non-keyed chainwinder supplied as standard. All other options are to be specified at time of quotation / order (additional costs apply).



Chainwinder - Black



Chainwinder - White



Chainwinder - Silver

1. Non-keyed chainwinder shown on top row 2. Keyed chainwinder shown on bottom row

Screens

Flyscreens

G.James flyscreens are a practical and economical method to cover the open area of your windows and doors, helping to keep your home free from flies. Our flyscreens are constructed using an extruded aluminium frame and standard fibreglass mesh.



Barrier Screens

Barrier screens offer an affordable, intermediate level of security for your home. G.James' barrier screens feature black Armagrilite (diamond-shaped, aluminium grille), fibreglass mesh and aluminium frame. This product complies with the *Building Code of Australia - Protection of Openable Windows* requirements.



Crimsafe Screens

Crimsafe screens provide a superior level of safety and security to your windows and doors. The integral high-tensile, stainless steel mesh is discrete in appearance ensuring your views are unhindered. This product complies with the *Building Code of Australia - Protection of Openable Windows* requirements.





Powdercoat Colours

* COLORBOND® steel colour match



Black (Satin)




Monument (Matt) *



Woodland Grey (Satin) *




Ultra Silver (Gloss)



Surfmist (Matt) *



Pearl White (Gloss)



Dune (Satin) *



Paperbark (Satin) *

Anodised Finishes



Clear



Residential Bronze

Note: All Anodised Finishes are price on application. All residential anodised finishes are supplied at AA15 (film thickness) with AA20 & AA25 available upon request.

Polished Silver (internal products only) and other Bronze finishes are available – contact your G.James representative for further information.

© COLORBOND is a registered trademark of BlueScope Steel Limited



Technical Data

Max. Size¹	1500mm (h) x 900mm (w)
Min. Width	450mm
Max. Glass Thickness	<ul style="list-style-type: none">• Single glazed – 13.52mm• Double glazed (IGU) – 24mm
Max. Water Performance	600 Pa
Perimeter Frame Width	48mm
WERS Data²	<ul style="list-style-type: none">• U-Value range: 3.30 – 6.60• SHGC range: 0.26 – 0.61
Acoustics²	Up to Rw 37
Bushfire Attack Level	Tested and certified to BAL-40
Fixing Types	Fin fix and face fix
Compatible Construction Types:	Brick veneer, clad wall, block wall, cavity brick and modular/transportable
Air Infiltration:	This window conforms with AS2047 air infiltration requirements for air-conditioned buildings

¹Maximum sizes are a guide only and subject to the wind rating or SLS/ULS requirements of the site.

²Consult your G.James representative to determine the most suitable product configuration for your requirements.

IMPORTANT

Don't let the opportunity pass to consider your glass options.

When specifying the windows and doors for your home, you'll make decisions in relation to ventilation, light, aesthetics and operation – all very relevant considerations. There is however another equally important consideration that is often overlooked, and that is the type of GLASS you choose. The selection of a 'performance' glass can address such issues as heat gain, energy efficiency, security, noise and glare reduction – all of which are central to your comfort and the overall liveability of your home.

