


246 Series - 3 Track (101mm) Sliding Door

Standard Size Range / Configurations

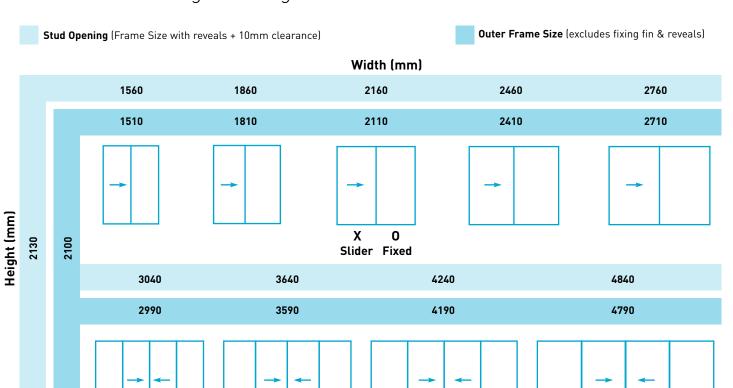

0

X

Fixed Slider Slider Fixed

Corner Door - Standard Size Range / Configurations

2335 (W1) / 2322 (W2)

Stud Opening (Important: Refer Size Chart and Product Specific Notes below)

Outer Frame Size (excludes fixing fin & reveals)

2503 (W1) / 2490 (W2)

Inside Corner* Width (mm)

Outside Corner** Width (mm)

Consult your G.James representative for the Stud Opening Width dimensions relative to your wall construction 1435 (W1) / 1422 (W2) 1735 (W1) / 1722 (W2) 1603 (W1) / 1590 (W2) 1903 (W1) / 1890 (W2) 90° Outside Corner** 90° Inside Corner* Height (mm) (W1) (W2) (W1) (W2)

Consult your G.James representative for the Stud Opening Width dimensions relative to your wall construction

2203 (W1) / 2190 (W2)

Important - Corner Door Product Specific Notes:

2035 (W1) / 2022 (W2)

Consult your G.James representative for:

See page 16 for Product Specific Notes

- > Stud Opening width dimensions relative to your wall construction
- > Specific reference points for (W1) & (W2) dimensions
- > Set-out details

• The Outer Frame Size dimensions are based on standard size, toughened glass panels. Additional charge will apply for nonstandard sizes.

^{*}Refer Page 17, Diagram 1 for the orientation of an Inside Corner configuration.

^{**} Refer Page 17, Diagram 2 for the orientation of an Outside Corner configuration.




246 Series - 5 Track (168mm) Sliding Door


Standard Size Range / Configurations

Stud Opening (Frame Size with reveals + 10mm clearance)

Outer Frame Size (excludes fixing fin & reveals)

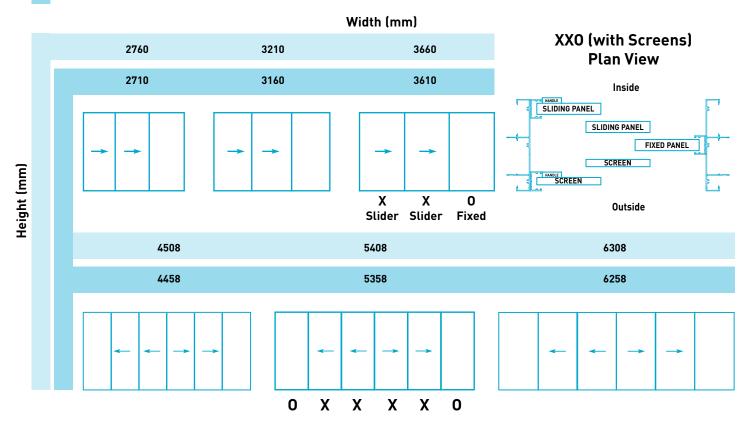

OXXXXO (with Screens) Plan View

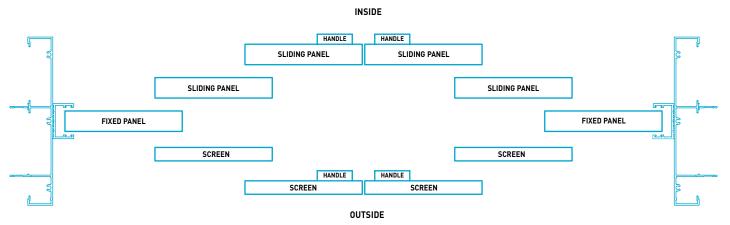

Product Specific Notes:

- All sliding panels are positioned on the inner most track(s) with any
- screens to the outer track(s).
 All sliding panels are positioned on the inner most track(s) with any screens to the outer track(s). This situation may differ for XXO and OXXXXO configurations - check with your G.James Representative.
- The frame size of all 2100mm high doors supplied to N5C3 (W60)
- category sites will be at 2054mm high.

 Sizes up to 2400mm, non-screenable configurations and low profile sill (excluding corner doors) are available on request.



246 Series - 5 Track (168mm) Corner Door

Standard Size Range / Configurations

Stud Opening (Important: Refer Size Chart and Product Specific Notes below) Outer Frame Size (excludes fixing fin & reveals)

Inside Corner Width (mm) - see Diagram 1 below

Outside Corner Width (mm) - see Diagram 2 below


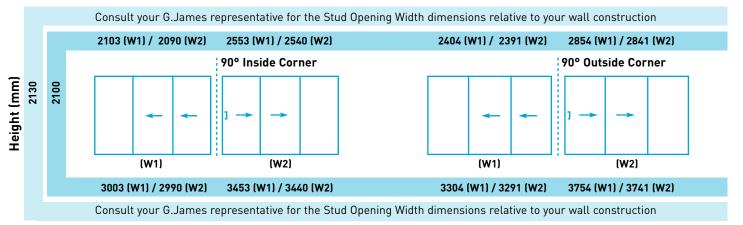



Diagram 1 - Inside Corner

Diagram 2 - Outside Corner

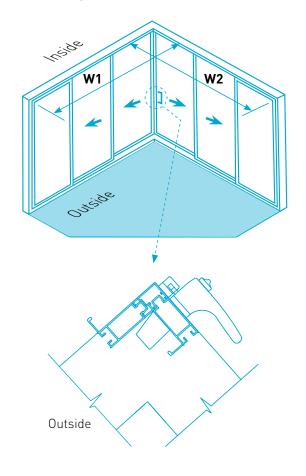

Important - Corner Door Product Specific Notes:

- Consult your G.James representative for:
 - > Stud Opening width dimensions relative to your wall construction
 - > Specific reference points for (W1) & (W2) dimensions
 - > Set-out details.

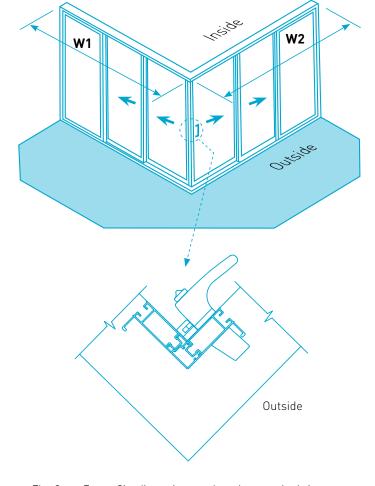

The Outer Frame Size dimensions are based on standard size, toughened glass panels. Additional charge will apply for nonstandard sizes.